


Rittal – The System.

Faster – better – everywhere.

Technical System Catalogue

RiLine60

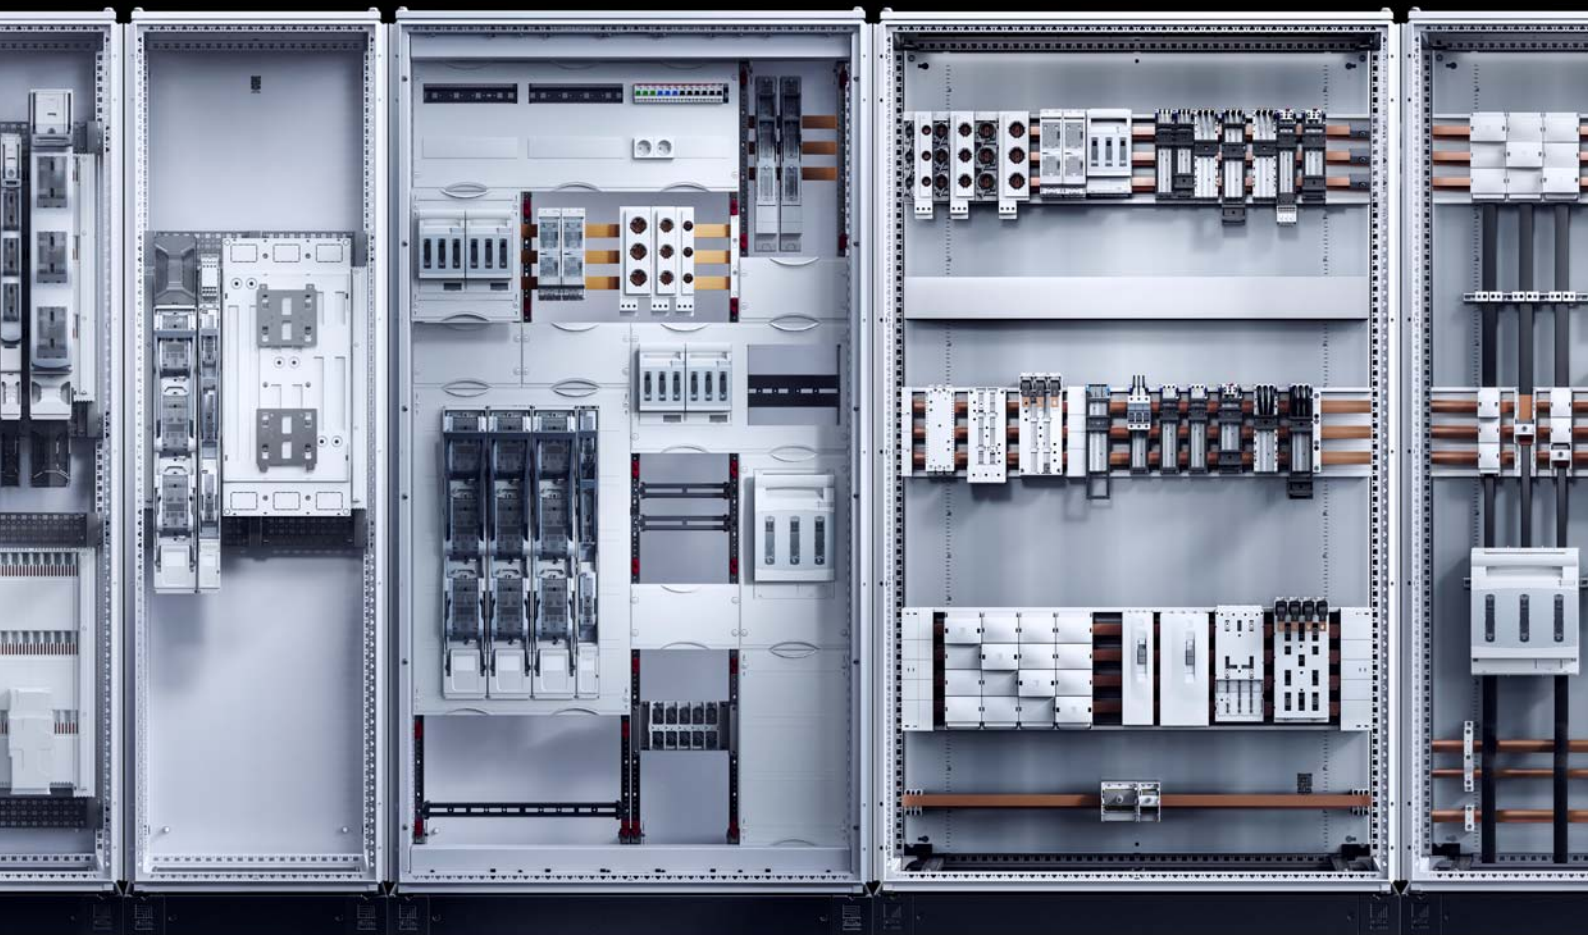

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Busbar systems

Rittal offers a comprehensive system package with components for individual customer solutions. Wherever in the world they are used, Rittal busbar systems are suitable for a wide range of applications, thanks to comprehensive testing, design verifications and high-profile approvals. Simple project planning, fast assembly and optimum protection against indirect live contact are included as a matter of course with all Rittal busbar system solutions. To this end, Rittal offers support systems and bars in conjunction with connection technology, component adaptors and fuse components – flexible units that meet your requirements to perfection.



- **Design verification:** Software-supported design verification in accordance with IEC 61 439-1
- **Output:** Optimum rating data for AC and DC applications
- **Save time:** Cost-effective, thanks to simple assembly
- **Energy efficiency:** Low-loss operation, thanks to perfect contact and connection technology
- **Safety:** Optimum protection against indirect live contact
- **For IEC and UL markets:** RiLine60 components meet the relevant standards and licensing conditions

Busbar systems

RiLine60 busbar systems

In the field of low-voltage technology, RiLine60 plays a key role in mechanical, plant and control engineering for industrial systems and data centres.

- Flat bar system up to 800 A
- PLS busbar system 800 A/1600 A
- 60 mm bar centre distance, 3- and 4-pole
- System technology tested to IEC 61 439-1 and UL 508 approved
- High safety standards for global use
- Unlike busbar sections with a rectangular cross-section, PLS busbars offer unrestricted top-mounting of the busbar supports with top-mounting components.
- Reliable contact hazard protection thanks to all-round encapsulation of the busbar system (base tray, cover section and end cover)



RiLine60 busbar systems for DC applications

When extending the familiar AC application range for alternating currents to include DC for direct currents, the properties of the RiLine60 busbar system in terms of contacting and contact hazard protection are retained.

Convincing benefits:

- High rated DC voltage up to 1500 V
- High short circuit protection up to 40 kA
- Design verification to IEC 61439-1
- Energy costs reduced by up to 10%
- Copper proportion reduced by up to 30%

Versatile application areas:

- Intermediate circuits for drive technology
- Photovoltaics
- Galvanics
- For use in the IT sector
- Individual applications



RiLine60 busbar systems

When it comes to future-oriented solutions for modern low-voltage power distribution, you are most definitely on the right track with Rittal busbar systems. RiLine60, the flexible 60 mm system – assembly-friendly, time-saving, individual and modular. The beneficial features of the RiLine60 busbar technology are a versatile range of applications, individual modularity, and tested for safe operation.

In RiLine60, Rittal has "cULus-listed" approval of a 60 mm busbar system. This approval provides decisive advantages for international machinery and plant manufacturers with target markets in the USA or Canada: minimal design input, streamlined sign-off of plant by UL (Underwriters Laboratories) and CSA (Canadian Standards Association), and therefore most importantly, no need to test for compliance with the Conditions of Acceptability (COA) of all the UL-recognized components used.



Benefits at a glance:

- Individual and cost-saving, thanks to component modularity and flexibility
- Complete solutions up to 1600 A for AC and DC applications
- Optimum protection against indirect live contact with all-round encapsulation of the busbar systems
- Maximum safety thanks to comprehensive IEC testing and UL approvals
- Optimum space utilisation with the busbar support suitable for top mounting
- Cost-effective, thanks to simple assembly
- Power Engineering software for fast, simple configuration



RiLine60 busbar systems

Flat copper bar system

- Rated current up to 800 A
- 60 mm bar centre distance
- 3- and 4-pole version

Approvals

- IEC 61 439-1
- DNV
- UL
- CSA

Integral adaptation of the busbar cross-section

Busbar support with integral cross-section adaptation for busbars 12 x 5 to 30 x 10 mm. An integral locating block automatically adapts to busbar widths of 15, 20, 25 or 30 mm. Spacers are available for width 12 mm.

The 5 and 10 mm busbar thickness is set using a slide.



PLS busbar system

- Rated current up to 800 A/1600 A
- 60 mm bar centre distance
- Design:
 - 3-pole (PLS 800/PLS 1600)
 - 4-pole (PLS 1600)

Approvals

- IEC 61 439-1
- DNV
- UL
- CSA

Top-mounting

The special design of the busbars and the structure of the busbar support allow unrestricted top-mounting of the busbar support with top-mounting components such as busbar connection adaptors, fuse elements and component adaptors. In other words, free positioning of the support means easier planning, greater stability where required, and optimum space utilisation.

The design also allows optimum heat dissipation into the environment. This means that the current density is higher than in the flat bar.



Contact hazard protection

Optimum contact hazard protection thanks to all-round encapsulation of the busbar system with base tray, cover section and end cover.

RiLine60 connection system

The combination of box and prism terminal technology allows users to specify the connection type shortly prior to commissioning. Either flexible busbars or round conductors may be used conveniently, quickly and reliably.



Benefits at a glance:


- The right solution for every application
- User-friendly connection system for cable conductors and laminated copper bars
- Short circuit-protected, shielded routing of the contact tracks
- Variants with feed-through function



RiLine60 connection system



Connection adaptor

- Versions
 - 63 A to 1600 A (3-pole)
 - 125 A to 1600 A (4-pole)
- For direct mounting on 60 mm bar systems
- Suitable for feeder circuits to UL 508A
- Cable outlet optionally top or bottom. There are also adaptors with feed-through function, i.e. connection at the top and bottom. This makes it possible to connect multiple bar systems positioned one on top of the other.
- Modern enclosure design with protection category IP 2X and clear slide latching of the cover
- Combined clamping prisms for the connection of cable conductors and laminated copper bars
- With optional arrangement of the clamping prisms, the same clamp can be used to connect either cable conductors or laminated copper bars

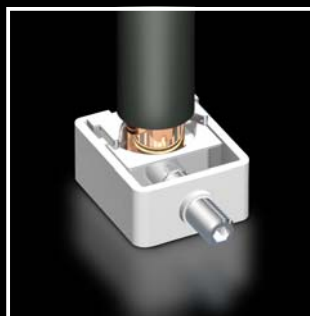


Connection block

- Suitable for conductor connection to PE, N and DC busbar systems with cable or laminated copper bar
- Cable outlet optionally at top or bottom
- The feed-through function of the connection block makes it possible to connect several systems positioned one on top of the other
- Optionally may be used on flat copper bars up to 30 x 10 mm or PLS busbars

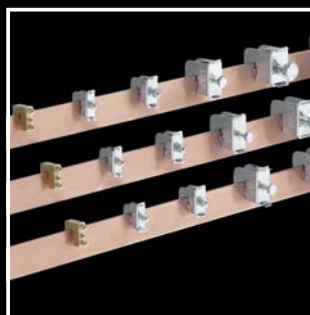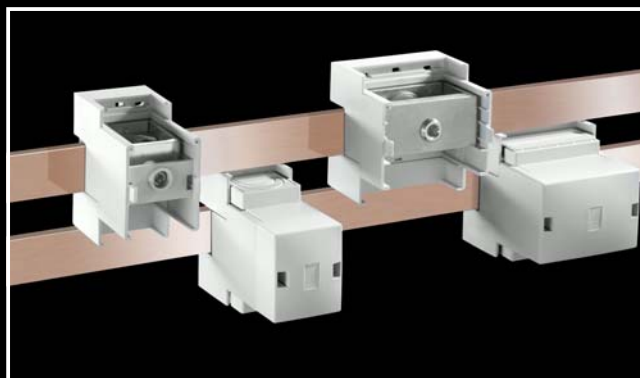

Connection clamps

- For universal applications, conductor connection clamps and plate clamps are available for connecting cable conductors and laminated copper bars
- Push-in conductor connection clamps are particularly suitable for quick and easy connection of round conductors to busbars

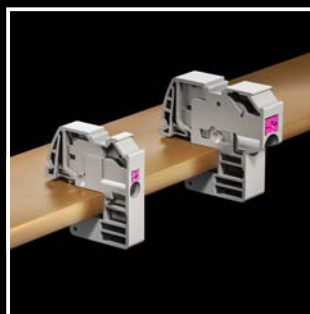

RiLine60 component adaptors

Innovative modularity, a high level of contact stability and fresh, rational approaches to component assembly are the distinguishing features of all RiLine60 component adaptors. The objectives are always the same: maximum operational and maintenance reliability, coupled with low installation and servicing costs.



Benefits at a glance:

- To suit all commercially available circuit-breakers
- Mounting benefits thanks to
 - Universal sliding block mounting system and
 - User-friendly support frame system
- Variable platform technology for switchgear assembly:
Adaptor version with and without support frames
- Cost-effective modular configuration of motor starter combinations
- Minimal downtime when replacing top-mounted equipment
- Simple module formation with free buying options



RiLine60 component adaptors


OM adaptor

- Assembly-friendly snap-on mounting on 60 mm busbar systems (3-pole)
- To suit all commercially available circuit-breakers
- With pre-configured connection cables for equipment connection. Alternatively, there is a version available with tension spring clamping technology.
- Premium version with connector and outgoing connector block for connecting 3 main conductors and 8 auxiliary conductors
- For side auxiliary switches and expansion modules, there is a 10 mm extension piece available which may be bayed on both sides as often as required. A channel integrated into the insert strips aids secure routing of cables.
- Safe support of starter combinations with special PinBlock
- Short circuit-resistant, fully shielded routing of the contact tracks



User-friendly support frame system and baying connection

- System separation between the adaptor section and support frame facilitates user-friendly assembly of the top-mounted equipment outside of the switchgear assembly. In this way, the busbars remain covered at all times, because only the support frame is removed during servicing.
- OM adaptors and OM supports (without contact system) may be freely bayed in the basic widths 45 mm and 55 mm. Bayed using a connection pin from the front. This allows retrospective creation of a module.

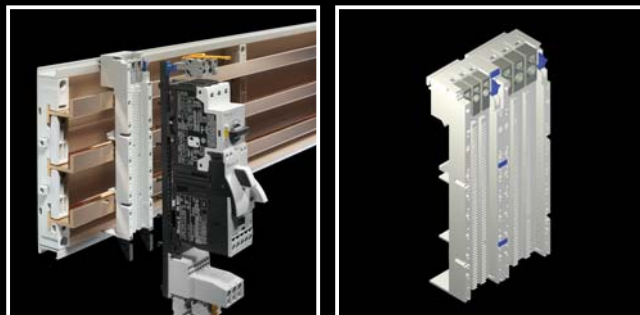

Circuit-breaker component adaptor

- For mounting on 60 mm busbar systems (3- and 4-pole)
- Fits all standard commercial circuit-breakers (MCCB = Moulded Case Circuit Breaker)
- Cable outlet top or bottom
- Short circuit-resistant, fully shielded routing of the contact tracks
- Positioning of the connection clamps for compact component connection, e.g. with special laminated strip connection bracket or connection with round conductors or with pre-configured connection strips



Universal sliding block attachment system

- Simple preassembly of the sliding blocks on the power circuit-breaker
- The circuit-breaker is assembled by inserting the sliding blocks into the guide channels on the circuit-breaker component adaptor
- Secure positioning of the switchgear thanks to the end stop



RiLine60 fuse elements

Rittal provides innovative fuse components for IEC or UL applications up to 630 A. From bus-mounting fuse bases up to 63 A, D-Switch bus-mounting fuse base with visual monitoring via NH disconnectors with UR approval for semi-conductor fuses and fuse holders in the RiLine60 Class range for J-Class fuse inserts, approved to the latest UL/CSA standards, right through to NH fuse-switch disconnectors in a slimline design. A wide range of fuse options that may be used for both the AC and DC sector. we have the right appropriate solution to suit every application.



Benefits at a glance:

- Reliable function at high currents
- Tested and/or approved to valid regulations/standards
- Simple handling during assembly
- Direct contacting on busbars, no drilling required
- Convenient, assembly-friendly direct connection
- High switching capacity
- Suitable for AC and DC applications



RiLine60 fuse elements

Bus-mounting fuse bases

- 3-pole for snap-on mounting on 60 mm busbar systems
- Variants: D02-E18, DII-E27, DIII-E33
- Rotatable plug-in feet allow fast installation of the elements on busbar systems with 5 or 10 mm bar thickness. The integral busbar anti-slip guard ensures a secure grip on the busbars even without fuses.
- The integral latch release allows simple, tool-free dismantling of the elements
- The one-piece threaded connection ensures an optimum electrical connection and heat dissipation from the fuse insert
- Terminals up to 25 mm² are available for conductor connection. Cable routing may be implemented either as under-floor wiring with a protected entry zone, or in the case of DII and DIII elements in the gap between the elements. For larger conductor connections, connection space extenders are available for side mounting (except Easy Connect version).
- One-piece cover system with pre-punched target cut-outs



Bus-mounting fuse bases Easy Connect version

Based on the basic elements, the Easy Connect versions offer the following benefits in addition to the aforementioned features:

- Pre-configured element ready for connection with no additional accessories or machining
- Simple connection without dismantling the contact hazard protection. For ease of service, may be retrofitted or a conductor may be connected with the system live, subject to observance of the valid safety regulations.
- Simple, safe measurement on the connection block is supported



Bus-mounting fuse base D-Switch

- 3-pole, switchable, for snap-on mounting on 60 mm busbar systems
- For the use of fuse inserts D01, D02, and 10 x 38 mm
- With integral visual fuse monitoring via flashing indicator
- Safely released via independent manual actuation
- May be latched and prepared for a lead seal, and closed in the isolated position



RiLine60 fuse elements



NH fuse-switch disconnectors

- Size 000 to 3
- 3-pole, switchable
- For mounting plate assembly or for mounting on 60 mm busbar systems
- Versions available in sizes 00 to 3, with or without fuse monitoring
- For AC and DC applications
- In addition to the existing type testing of NH disconnectors to DIN EN 60 947-3, sizes 00 to 3 (without fuse monitoring) have also undergone UL testing for the use of NH fuses with UR approval
- Approved to the very latest UL/CSA standard (UL 4248-1/UL 4248-8, CSA C22.2 No. 4248.107/ CSA C22.2 No. 4248-07)

Further information may be found on pages 13/14.



NH slimline fuse-switch disconnectors

- Size 00 to 3
- 3-pole, switchable
- For mounting on busbar systems 60 mm (size 00), 100 mm (size 00) and 185 mm (size 00 to 3)
- Versions available in sizes 1 to 3, with or without fuse monitoring
- For AC and DC applications
- Option of using current converter technology

Further information may be found on pages 15/16.

RiLine60 fuse elements

Easy changeover of the cable outlet


The uniform design of the RiLine60 generation of NH disconnectors combines optimum functionality with an attractive design. This feature supports system-compatible integration into the RiLine60 contact hazard protection concept with base tray. In just 3 seconds, the same device may be used to swap the cable outlet from top to bottom for all RiLine60 NH bus-mounting fuse-switch disconnectors by simply rotating the mounting hook.

In this way, there is no need to decide whether the cable outlet will go at the top or bottom until immediately prior to assembly. This function offers a clear benefit for customers, by halving the required warehousing and associated costs.



Lid lock and seal

All designs are supplied as standard with a lock that prevents unintentional opening of the disconnector lid. In addition, the lock position may also be sealed with sealing wire.

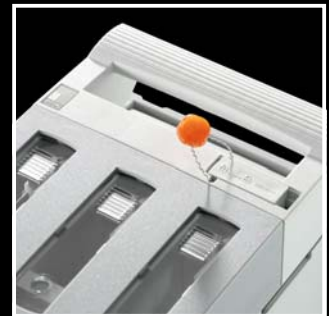

Simple signalling of the switching position with micro-switches

All sizes have the option of accommodating micro-switches to indicate the switching position. The micro-switch simply clips into the relevant position in the disconnector chassis. Two micro-switch locators are available as standard for each device. This allows the switching position of the disconnector lid to be communicated to a programmable logic controller (PLC), while using the second micro-switch to operate the load contactor at the same time. The micro-switch wiring is routed through the device to the rear or through the pre-punched knock-out of the contact hazard protection cover plates.



Top-mounting of supports even with flat bars

The panels (removable at the side) allow top-mounting of RiLine60 busbar supports for all flat bars, enabling very compact configuration of the units. In conjunction with the super-slimline design, this allows a space-saving configuration.



RiLine60 fuse elements



Electronic fuse monitor

The electronic fuse monitor is used to monitor proper functioning of the fuses, and has a test button for easy simulation of a defective fuse during commissioning. The auxiliary power for the evaluation electronics is generated from the input side of the three-phase network. For technical reasons, the rated frequency of the supplying network must not be exceeded, otherwise the electronic fuse monitor will be damaged.

Use in conjunction with motors in frequency converter mode is one such example. In such cases, electronic fuse monitoring must only be used as rotary current fusing for the frequency converter on the input side, and not in the frequency-modulated motor supply leads. A green and a red LED display indicate the operating status of the electronic fuse monitor.

Note:

The fuses used **MUST** be designed with live puller lugs.




Electromechanical fuse monitoring


Unlike an electronic monitor, this system operates without auxiliary power, yet still performs the same functions.

Moreover, it can also be used for DC voltages, as follows:

DC 24 ... 250 V

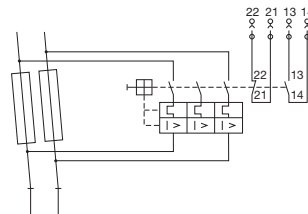



DC 100 ... 600 V

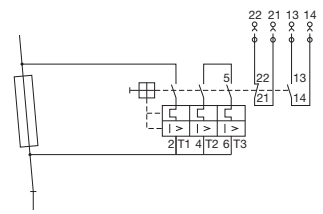

The rocker switch on the operating housing additionally provides a visual display of the operating status.

Note:

The fuses used **MUST** be designed with live puller lugs.

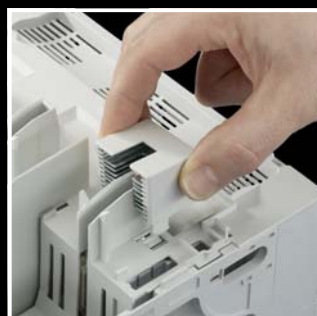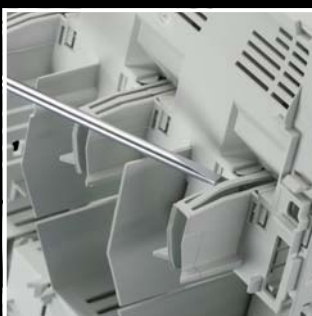

Arc chambers to increase switching capacity

The clearance for the arc is exposed by simply levering out the plastic strip on the switch blade dome. The required arc chamber is clipped into position from the front for sizes 1 to 3 and increases the utilisation category by up to 2 levels.

RiLine60 fuse elements

Easy changeover of the cable outlet

The uniform design of the RiLine60 generation of NH slimline fuse-switch disconnectors combines optimum functionality with an attractive design. This feature supports system-compatible integration into the RiLine60 contact hazard protection concept with base tray. In just 3 seconds, the cable outlet of the RiLine60 NH fuse-switch disconnectors size 00 may be swapped from top to bottom with one and the same device by simply rotating the mounting hook.

In this way, there is no need to decide whether the cable outlet will go at the top or bottom until immediately prior to assembly. This function offers a clear benefit for customers, by halving the required warehousing and associated costs.




Simple removal of the switch unit

The multi-functional switch provides the user with visually clearly defined operation of the switch unit. Simple actuation at the sides means that the switch unit may either be removed completely, or placed in the parked position.



Simple removal of the fuse inserts

The fuse is released directly from the front. This allows the operator to hold the switch unit safely and conveniently while removing the fuse. The location mechanism of the switch unit is a practical mounting benefit for reuse of the fuse. The fuses are readily inserted single-handedly.

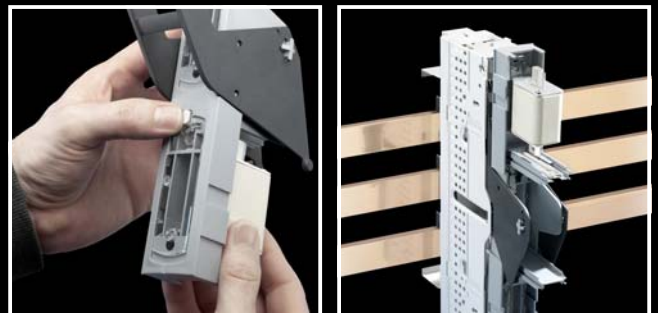

Simple signalling of the switching position

Whether to signal the switching position to the programmable logic controller (PLC) or for load disconnection of a relay – two micro-switch fixtures which may be populated independently of one another satisfy these conditions in a flash.



RiLine60 fuse elements



Top-mounting of supports even with flat bars

Thanks to the special design of the strip chassis, there is the option of direct, space-saving top mounting of the RiLine60 flat bar supports.



Electronic fuse monitor

The electronic fuse monitor is used to monitor proper functioning of the fuses, and has a test button for easy simulation of a defective fuse during commissioning. The auxiliary power for the evaluation electronics is generated from the input side of the three-phase network. For technical reasons, the rated frequency of the supplying network must not be exceeded, otherwise the electronic fuse monitor will be damaged.

Use in conjunction with motors in frequency converter mode is one such example. In such cases, electronic fuse monitoring must only be used as rotary current fusing for the frequency converter on the input side, and not in the frequency-modulated motor supply leads. A green and a red LED display indicate the operating status of the electronic fuse monitor.

Note:

The fuses used MUST be designed with live puller lugs.



Integral current converter technology

The NH slimline fuse-switch disconnectors allow retrofitting of current converters. The installation height of the strips is not influenced by mechanical integration.

RiLine60 fuse elements

UL fuse technology

UL approved fuse technology for use in the North American market.

Fuse holder for cylindrical fuse inserts:

- J-Class
- CC-Class



Fuse holder 30 A/60 A

- For the use of fuses to American/Canadian standards
- For snap-on mounting on support rails 35 mm (7.5/10 mm high) to DIN EN 60 715 or RiLine60 component adaptor combinations (OM adaptors/supports)
- Visual fuse monitoring via indicator lights
- 3-pole, switchable off-load
- For cylindrical CC-Class fuses to UL 4248-8 or J-Class fuses in 2 current ranges: 30 A/60 A
- Approved to the very latest UL/CSA standard (UL 512, CSA C22.2 No. 39)



Fuse holder 61 A to 400 A

- For the use of fuses to American/Canadian standards
- Versions for direct mounting on 60 mm busbar systems
- 3-pole, for use as fuse carriers
- For cylindrical J-Class fuses to UL 4248-8 in 3 current ranges: 61-101 A / 101-200 A / 201-400 A
- Reliable protection against indirect live contact with lid and internal contact hazard protection covers
- Self-locking voltage test holes and lid lock/seal
- Approved to the very latest UL/CSA standard (UL 4248-1/UL 4248-8, CSA C22.2 No. 4248.107/ CSA C22.2 No. 4248-07)



Information on UL (Underwriters Laboratories)

Information on UL

UL or Underwriters Laboratories was founded in 1894 as a non-profit-making organisation for testing and certification. UL operates several testing laboratories in the United States

and subsidiaries worldwide, with an emphasis on product testing aimed at general safety.

Why are UL approvals important?

- International regulations and standards such as NEMA and IEC are used by manufacturers as a basis for product developments and subsequent testing.
- Nationally recognised test laboratories confirm and certify that a product complies with the specific standards; in North America this is carried out by organisations such as UL or CSA (Canadian Standards Association).
- For many applications, the sole use of UL and/or CSA-approved products is a requirement; consequently, it is advisable to design electrical controllers for North American applications with suitable UL-approved components.

How does the US system for electrical safety work?

Every piece of electrical equipment (machine/plant) is tested by the competent local inspector (AHJ = Authority Having Jurisdiction) prior to commissioning. The AHJ has the final say with regard to commissioning. All AHJs use Standard NFPA 70 (NFPA = National Fire Protection Association) as a basis, which is generally regarded as the NEC (National Electrical Code). NFPA 70 is therefore an important basis for UL 508A (Industrial Control Panels). The AHJ considers the use of UL-recognized or UL-listed components an important indication that a system

complies with the safety requirements to NFPA 70. This saves time and money during construction and commissioning of the equipment, as the UL symbol indicates that testing of the components and/or of the system did not reveal any foreseeable risks with regard to fire, electric shock and associated dangers.

The UL symbols: “UL listed” or “UL recognized”

When labelling UL-approved products, a general distinction is made between Recognized Components and Listed Devices:

1 (Recognized Components)

This label is used on products which are not complete in terms of their application. These products are listed in the UL’s “yellow component database”. When used correctly, these components must comply with the “Conditions of Acceptability”, which list the framework conditions and application parameters approved by the UL.



2 (Listed Devices)

Here, it is only important to note that the remarks and rating data specified on the product are observed with the application. Terminals for field-wiring are authorised as Listed Devices (see “Important notes”, point 3, page 19).



Recognized Component 
Sample rating plate for a busbar support with 



Listed Device 
Sample rating plate for a busbar support with 

Information on UL (Underwriters Laboratories)

Application areas for UL 508 and UL 508A

UL 508 describes industrial control components and is therefore the decisive standard for the assessment of Rittal power distribution components. For example, this standard contains information on:

- Starter
- Relays and contactors
- Circuit-breakers
- Controllers

UL 508A describes industrial control panels and is therefore the decisive standard for switchgear manufacturers.

For example, this standard contains information on:

- Machine controllers
- Elevator controllers
- Crane controllers
- Equipment for heating, air-conditioning and ventilation systems and describes, for example, in table SA 1.1 the devices which may be used in this standard and the requirements governing the standard and category number.

Both standards describe control systems for general industrial applications with a rated voltage of up to 600 V. The maximum permissible ambient temperature is 40°C.

Distinguishing between feeder and branch circuits

Standard UL 508A makes a distinction between feeder circuits and branch & control circuits. Generally speaking, the term “feeder circuits” refers to the part of the circuit located at the supply end before the last overcurrent protective device (a device approved to UL 489). Increased requirements with regard to creepage distances and clearances apply to this part of the circuit.

The term “branch & control circuits” refers to the part of the circuit located after the last overcurrent protective device. When using busbar systems, it is important to know whether the application is in the feeder section or the branch section, as the requirements governing the required creepage distances and clearances are significantly higher for feeder circuits.

Important notes for the use of busbar systems to UL 508A

1. Creepage distances and clearances

One of the principal requirements in UL 508A is the amendment to the required creepage distances and clearances for feeder circuits. The following distances are required for applications >250 V:

- Between phases:
 - A Creepage distance 50.8 mm (2 inches)
 - B Clearance 25.4 mm (1 inch)
- Between phase and earthed, uninsulated metal parts:
 - A Creepage distance 25.4 mm (1 inch)
 - B Clearance 25.4 mm (1 inch)

Rittal RiLine complies with these requirements. All busbar connection adaptors and component adaptors (OM adaptors with standard AWG connection cables and circuit-breaker adaptors) have been designed in accordance with these requirements. However, users should bear in mind a small number of differences from the IEC version:

- Special UL busbar supports for flat bars and Rittal PLS with increased creepage distances and clearances
- In order to guarantee the required distances between live parts and the earthed mounting plate, the use of a RiLine60 base tray is compulsory

2. Rated currents

For untested busbar applications, UL 508A specifies a current carrying capacity of 1000 A/inch² (1.5 A/mm²). This value may be higher if the product or application has undergone suitable testing. Rittal has conducted extensive testing in this respect in order to give users the maximum benefits when using the RiLine60 busbar system. The benefit of such testing is that busbar systems with higher rated currents may be used than permitted by the default value. For example, a busbar with dimensions 30 x 10 mm can take 700 A instead of 465 A.


3. Terminals for factory or field wiring

In accordance with the UL standards, connection terminals may be approved for factory or field wiring. If a terminal is approved for factory wiring, it may only be used in switchgear assembly by suitably trained professionals. If connection terminals are to be used in the field (e.g. on a construction site), the component must be approved for field wiring.

The terminals of the busbar connection adaptors and component adaptors in the Rittal RiLine60 series have therefore been tested for field wiring applications.

Definition of creepage distances and clearances:

- A Creepage distance between active conductors/busbars
- B Clearance between active conductors/busbars
- C Creepage distance between active conductors/busbars and earthed metal parts
- D Clearance between active conductors/busbars and earthed metal parts

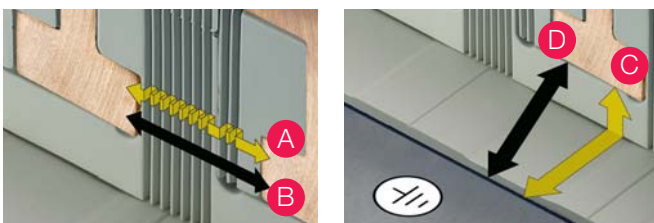

RiLine60 components

Overview of SCCR

Selection of RiLine60 UL busbar systems and components compliant with UL 508A

RiLine60 busbar system								
Model No.	Code	Short Circuit Current Rating (SCCR) kA	Voltage AC max. V	Branch Circuit Protective Device (BCPD)			Support spacing mm	Busbars W x H mm/ PLS busbar
				Type	Category Control No. (CCN)	Rating max. A		
Busbar supports								
9340.050	Busbar support, 3-pole, 60 mm bar centre distance	14	600	-	-	-	500	12 x 5/10
		22	600	-	-	-	500	15/20/25 x 5/10
		25	600	-	-	-	250	12 x 5/10
		25	600	-	-	-	500	30 x 5/10
		30	600	-	-	-	250	15/20/25 x 5/10
		50	600	Fuse Class L	JDDZ/7	800	350	30 x 5/10
		54	600	Circuit breaker	DIVQ/7	600	500	30 x 5/10
		65	480	Circuit breaker	DIVQ/7	600	250	30 x 5/10
9340.004	Busbar support, 4-pole, 60 mm bar centre distance	73	600	Fuse Class L	JDDZ/7	800	250	30 x 5/10
		22	600	-	-	-	500	15/20/25 x 5/10
		25	600	-	-	-	500	30 x 5/10
		30	600	-	-	-	250	15/20/25 x 5/10
9341.050	Busbar support PLS 800, 3-pole, 60 mm bar centre distance	65	600	Fuse Class L	JDDZ/7	800	250	15/20/25 x 5/10
		14	600	-	-	-	500	PLS 800
		22	600	-	-	-	200	PLS 800
		50	600	Circuit breaker	DIVQ/7	600	250	PLS 800
		50	600	Fuse Class L	JDDZ/7	800	250	PLS 800
9342.050	Busbar support PLS 1600, 3-pole, 60 mm bar centre distance	65	480	Circuit breaker	DIVQ/7	600	150	PLS 800
		65	600	Fuse Class J	JDDZ/7	600	150	PLS 800
		25	600	-	-	-	500	PLS 1600
		30	600	-	-	-	250	PLS 1600
		35	600	-	-	-	150	PLS 1600
9342.004	Busbar support PLS 1600 PLUS, 4-pole, 60 mm bar centre distance	65	600	Fuse Class L	JDDZ/7	1400	250	PLS 1600
		65	600	Fuse Class L	JDDZ/7	1600	100	PLS 1600
		35	600	-	-	-	500	PLS 1600
		50	600	-	-	-	250	PLS 1600
9342.200 9342.210	Connection adaptor 63 A, 3-pole	65	600	Fuse Class J	JDDZ/7	60	-	-
		65	480	Manual motor controller	NLRV/7	65	-	-
		50	600	Fuse Class K5	JDDZ/7	125	-	-
		65	480	Circuit breaker	DIVQ/7	125	-	-
9342.240	Connection adaptor 125 A, 3-pole	65	600	Fuse Class J	JDDZ/7	400	-	-
		50	600	Fuse Class K5	JDDZ/7	125	-	-
		65	480	Circuit breaker	DIVQ/7	125	-	-
9342.224	Connection adaptor 125 A, 4-pole	65	600	Fuse Class J	JDDZ/7	400	-	-
		50	600	Fuse Class K5	JDDZ/7	250	-	-
		65	480	Circuit breaker	DIVQ/7	125	-	-
9342.250 9342.270	Connection adaptor 250 A, 3-pole	65	600	Fuse Class J	JDDZ/7	400	-	-
		50	600	Fuse Class K5	JDDZ/7	250	-	-
		50	600	Combination motor controller	NKJH/7	250	-	-
9342.254	Connection adaptor 250 A, 4-pole	65	480	Circuit breaker	DIVQ/7	250	-	-
		65	600	Fuse Class J	JDDZ/7	400	-	-
		50	600	Fuse Class K5	JDDZ/7	250	-	-
9342.300	Connection adaptor 800 A, 3-pole	50	600	Combination motor controller	NKJH/7	250	-	-
		65	60	Fuse Class K5	JDDZ/7	600	-	-
		65	480	Circuit breaker	DIVQ/7	600	-	-
9342.310 9342.311 9342.314	Connection adaptor 800 A (3 x 1-pole) Connection block 800 A, 1-pole Expansion set for 9342.310 (4-pole)	65	600	Fuse Class L	JDDZ/7	800	-	-
		65	480	Circuit breaker	DIVQ/7	600	-	-
		65	600	Fuse Class L	JDDZ/7	800	-	-
9342.320 9342.321 9342.324	Connection adaptor 1600 A (3 x 1-pole) Connection block 1600 A, 1-pole Expansion set for 9342.320 (4-pole)	65	480	Circuit breaker	DIVQ/7	1200	-	-
		65	600	Fuse Class L	JDDZ/7	1600	-	-

RiLine60 busbar system

Model No.	Code	Short Circuit Current Rating (SCCR) kA	Voltage AC max. V	Branch Circuit Protective Device (BCPD)			Support spacing mm	Busbars W x H mm/ PLS busbar
				Type	Category Control No. (CCN)	Rating max. A		
Fuse holders								
9345.040	Fuse holder Class CC, 30 A, 3-pole	200	600	Fuse Class CC	JDDZ/7	30	-	-
9345.005	Fuse holder Class CC, 30 A, 3-pole	200	600	Fuse Class CC	JDDZ/7	30	-	-
9345.015	Fuse holder Class J, 30 A, 3-pole	200	600	Fuse Class J	JDDZ/7	30	-	-
9345.035	Fuse holder Class J, 60 A, 3-pole	200	600	Fuse Class J	JDDZ/7	60	-	-
9345.100	Fuse holder Class J, 61 – 100 A, 3-pole	100	600	Fuse Class J	JDDZ/7	100	-	-
9345.200	Fuse holder Class J, 101 – 200 A, 3-pole	100	600	Fuse Class J	JDDZ/7	200	-	-
9345.400	Fuse holder Class J, 201 – 400 A, 3-pole	100	600	Fuse Class J	JDDZ/7	400	-	-
OM adaptors								
9340.760 9340.780	OM adaptor 16 A, AWG 12, 3-pole	30	600	Fuse Class K5	JDDZ/7	60	-	-
		50	600	Fuse Class K5	JDDZ/7	35	-	-
		65	600	Fuse Class J	JDDZ/7	30	-	-
		65	600	Fuse Class K5	JDDZ/7	30	-	-
		50	600	Combination motor controller	NKJH/7	27	-	-
		65	480	Combination motor controller	NKJH/7	32	-	-
9340.310 9340.320 9340.340 9340.370 9340.400	OM adaptor 25 A, AWG 12, 3-pole	30	480	Fuse Class K5	JDDZ/7	60	-	-
		50	600	Fuse Class K5	JDDZ/7	35	-	-
		65	600	Fuse Class J	JDDZ/7	30	-	-
		65	600	Fuse Class K5	JDDZ/7	30	-	-
		50	600	Combination motor controller	NKJH/7	27	-	-
		65	480	Combination motor controller	NKJH/7	32	-	-
9340.350 9340.380 9340.390 9340.770 9340.790	OM adaptor 32 A, AWG 10, 3-pole	30	480	Fuse Class K5	JDDZ/7	60	-	-
		50	600	Fuse Class K5	JDDZ/7	35	-	-
		65	600	Fuse Class J	JDDZ/7	30	-	-
		65	600	Fuse Class K5	JDDZ/7	30	-	-
		50	600	Combination motor controller	NKJH/7	27	-	-
		65	480	Combination motor controller	NKJH/7	32	-	-
9340.460 9340.470	OM adaptor 32 A, AWG 10, 3-pole	30	480	Fuse Class K5	JDDZ/7	60	-	-
		30	600	Combination motor controller	NKJH/7	63	-	-
		65	480	Fuse Class J	JDDZ/7	60	-	-
		65	600	Manual motor controller	NLRV/7	63	-	-
		65	480	Combination motor controller	NKJH/7	63	-	-
		65	480	Combination motor controller	NKJH/7	63	-	-
9340.710 9340.720 9340.730 9340.740 9340.750	OM adaptor 40 A, AWG 8, 3-pole	30	600	Fuse Class K5	JDDZ/7	60	-	-
		30	480	Combination motor controller	NKJH/7	63	-	-
		65	600	Fuse Class J	JDDZ/7	60	-	-
		65	480	Manual motor controller	NLRV/7	63	-	-
		65	480	Combination motor controller	NKJH/7	63	-	-
		65	480	Combination motor controller	NKJH/7	63	-	-
9340.410 9340.430 9340.450 9340.700	OM adaptor 65 A, AWG 6, 3-pole	30	600	Fuse Class K5	JDDZ/7	60	-	-
		30	480	Combination motor controller	NKJH/7	63	-	-
		65	600	Fuse Class J	JDDZ/7	60	-	-
		65	480	Manual motor controller	NLRV/7	63	-	-
		65	480	Combination motor controller	NKJH/7	63	-	-
		65	480	Combination motor controller	NKJH/7	63	-	-
Circuit-breaker component adaptor								
9342.400 9342.410	Circuit-breaker component adaptor 100 A, 3-pole	65	480	Manual motor controller	NLRV/7	100	-	-
9342.540 9342.550	Circuit-breaker component adaptor 125 A, 3-pole	65	480	Circuit breaker	DIVQ/7	125	-	-
9342.504 9342.514	Circuit-breaker component adaptor 125 A, 4-pole	65	480	Circuit breaker	DIVQ/7	125	-	-
9342.610 9345.600 9345.610	Circuit-breaker component adaptor 250 A, 3-pole	65	480	Circuit breaker	DIVQ/7	250	-	-
9345.604 9345.614	Circuit-breaker component adaptor 250 A, 4-pole	65	480	Circuit breaker	DIVQ/7	250	-	-
9345.720 9345.730	Circuit-breaker component adaptor 400 A, 3-pole	65	480	Circuit breaker	DIVQ/7	400	-	-
9345.700 9345.710	Circuit-breaker component adaptor 630 A, 3-pole	65	480	Circuit breaker	DIVQ/7	600	-	-

Rittal – The System.

Faster – better – everywhere.

- Enclosures
- Power Distribution
- Climate Control
- IT Infrastructure
- Software & Services

You can find the contact details of all Rittal companies throughout the world here.



www.rittal.com/contact

XWWW00295EN2406

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES



FRIEDHELM LOH GROUP