



# 中国国家强制性产品认证证书

CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

Certificate No.: 2020122317113891

## THE APPLICANT

Rittal GmbH & Co. KG

Auf dem Stutzelberg, 35745 Herborn, Germany

## THE MANUFACTURER

Rittal GmbH & Co. KG

Auf dem Stutzelberg, 35745 Herborn, Germany

## THE FACTORY

Rittal RGS GmbH

Werk 2, Rudolf-Loh-Straße 2, 35716 Dietzhölztal, Deutschland

## PRODUCT AND MODEL(S)

Rittal Ex Empty Enclosure

KEL 93XX.YYY, refer to the attachment, Ex Marking: Ex eb IIC Gb, Ex tb IIIC Db

## STANDARDS AND TECHNICAL REQUIREMENTS

GB/T 3836.1-2021, GB/T 3836.3-2021, GB/T 3836.31-2021

THIS IS TO CERTIFY THAT THE ABOVE-MENTIONED PRODUCT COMPLIES WITH THE REQUIREMENTS OF

IMPLEMENTATION RULE FOR CHINA COMPULSORY CERTIFICATION (CNCA-C23-01: 2024).

DATE OF ISSUE: 2025-12-25

DATE OF VALIDITY: 2030-12-24

THE INFORMATION AND VALIDITY OF THIS CERTIFICATE MAY BE VERIFIED BY THE QR CODE AND

THE WEBSITE OF ISSUER AND CNCA (WWW.CNCA.GOV.CN).

THIS CERTIFICATE HAS BEEN UP-ISSUED. THE DATE OF INITIAL ISSUE IS 2020-12-28.



方圆标志认证集团  
China Quality Mark Certification Group

朱江华





# 中国国家强制性产品认证证书

证书编号: 2020122317113891

## 认证委托人名称及地址

Rittal GmbH & Co. KG

Auf dem Stutzelberg, 35745 Herborn, Germany

## 生产者名称及地址

Rittal GmbH & Co. KG

Auf dem Stutzelberg, 35745 Herborn, Germany

## 生产企业名称及地址

Rittal RGS GmbH

Werk 2, Rudolf-Loh-Straße 2, 35716 Dietzhölztal, Deutschland

## 产品名称和系列、型号、规格

威图防爆空箱体

KEL 93XX. YYY 型 详见附件, 防爆标志: Ex eb IIC Gb, Ex tb IIIC Db

## 产品标准和技术要求

GB/T 3836. 1-2021, GB/T 3836. 3-2021, GB/T 3836. 31-2021

上述产品符合《强制性产品认证实施规则 防爆电气》  
(CNCA-C23-01: 2024) 的要求, 特发此证。

发证日期: 2025 年 12 月 25 日 有效期至: 2030 年 12 月 24 日

证书信息和有效性可扫描下方二维码或登录发证机构网站查验,  
也可在认监委网站 ([www.cnca.gov.cn](http://www.cnca.gov.cn)) 查询。

本证书为变更证书, 证书首次颁发日期: 2020 年 12 月 28 日



方圆标志认证集团  
China Quality Mark Certification Group

朱工  
J.W.G.






# 中国国家强制性产品认证证书

证书编号: 2020122317113891

证书附页: 第 1 页共 2 页

型号/规格:

KEL 93XX.YYY 型

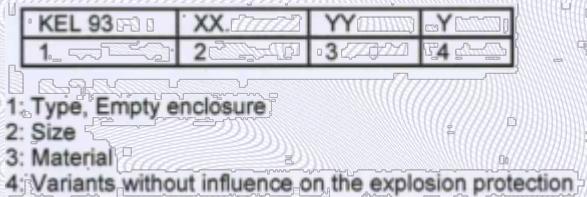

尺寸:

150 × 150 × 80 = 01

300 × 150 × 80 = 02

200 × 200 × 80 = 03

300 × 200 × 80 = 04

400 × 200 × 120 = 05

300 × 300 × 120 = 06

600 × 200 × 120 = 07

材料:

1. 4301 / 304 = 00

1. 4401 / (316) = 30

1. 4571 = 40

1. 4404 / (316L) = 50

EN 10327 = 21

防爆标志:

Ex eb IIIC Gb, Ex tb IIIIC Db

电气参数:

技术数据:

尺寸	长度	宽度	深度
最小	150mm	150mm	80mm
最大	600mm	300mm	120mm
环境温度	-30° C ≤ Ta ≤ +80° C		
防护等级	IP66		

Ex 设备特殊使用条件或 Ex 元件的限定使用条件:

本页为证书附页, 应与证书主页同时使用。

**CQM 方圆标志认证集团**  
China Quality Mark Certification Group



# 中国国家强制性产品认证证书

证书编号: 2020122317113891

证书附页: 第 2 页共 2 页

- 1) 额定电压: 最大 1000V; 额定电流: 最大 125A; 保护接地导线截面积: 最大 35mm<sup>2</sup>。相应支路和接线盒的额定电压、额定电流和额定截面积均是基于已安装的电气设备而确定的。电气元件的安装需要由检测机构进行进一步的评估。
- 2) 产品为 Ex 元件, 与其他防爆电气设备或系统一起使用时需附加认证, 不能单独使用。
- 3) 当外壳喷塑时, 在可燃性粉尘环境中使用时, 须采取措施避免静电积聚, 见使用说明书。

本页为证书附页, 应与证书主页同时使用。

