

Rittal – The System.

Faster – better – everywhere.

► LED system light – Sensationally bright



ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES



FRIEDHELM LOH GROUP

Rittal – The System.

Faster – better – everywhere.



ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL


FRIEDHELM LOH GROUP

LED system light

Perfect enclosure illumination

The most innovative lighting technology, tailored to Rittal enclosures.

Do not settle for less! The new LED system light sets brand new standards in all areas.

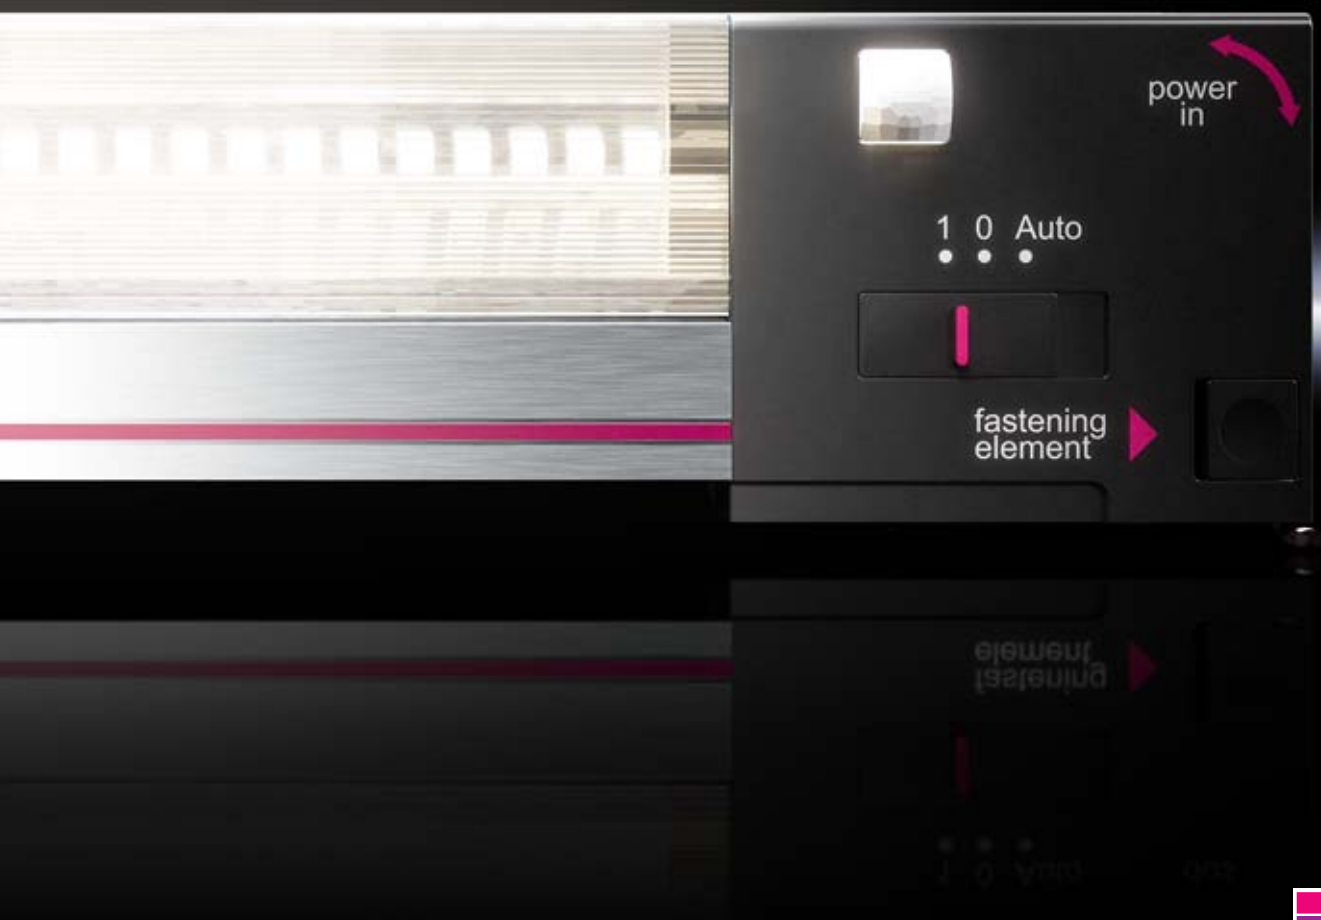

IT INFRASTRUCTURE

SOFTWARE & SERVICES



Rittal – The System.

Faster – better – everywhere.



LED system light

Focus on what's important

- Innovative LED technology for even more light into the very last corner, from the roof to the base
- Intelligent lighting, tailored to the geometry of the enclosure, thanks to a special optical cover with Fresnel structure
- Optical cover with two different Fresnel structures
- The cover is easily rotated – to adapt the light distribution to the current installation situation
- Enormous luminous intensity from 900 to 1200 lumens, directed selectively into the enclosure



Conventional light

Rittal LED system light



Rittal – The System.


Faster – better – everywhere.



LED system light

Time savings under control

- Fast, tool-free assembly thanks to a latching hook system on a 25 mm pitch pattern of holes; simply latch and secure
- Optional screw-fastening also available, or opt for complete flexibility with a magnetic attachment freely positionable inside the enclosure
- May be fitted horizontally and vertically with no loss of space in the enclosure; existing rails and sections can simply be covered.
- Lights with motion detectors are equipped with a rotating LED board as standard, allowing the direction of light to be perfectly adapted to any installation situation

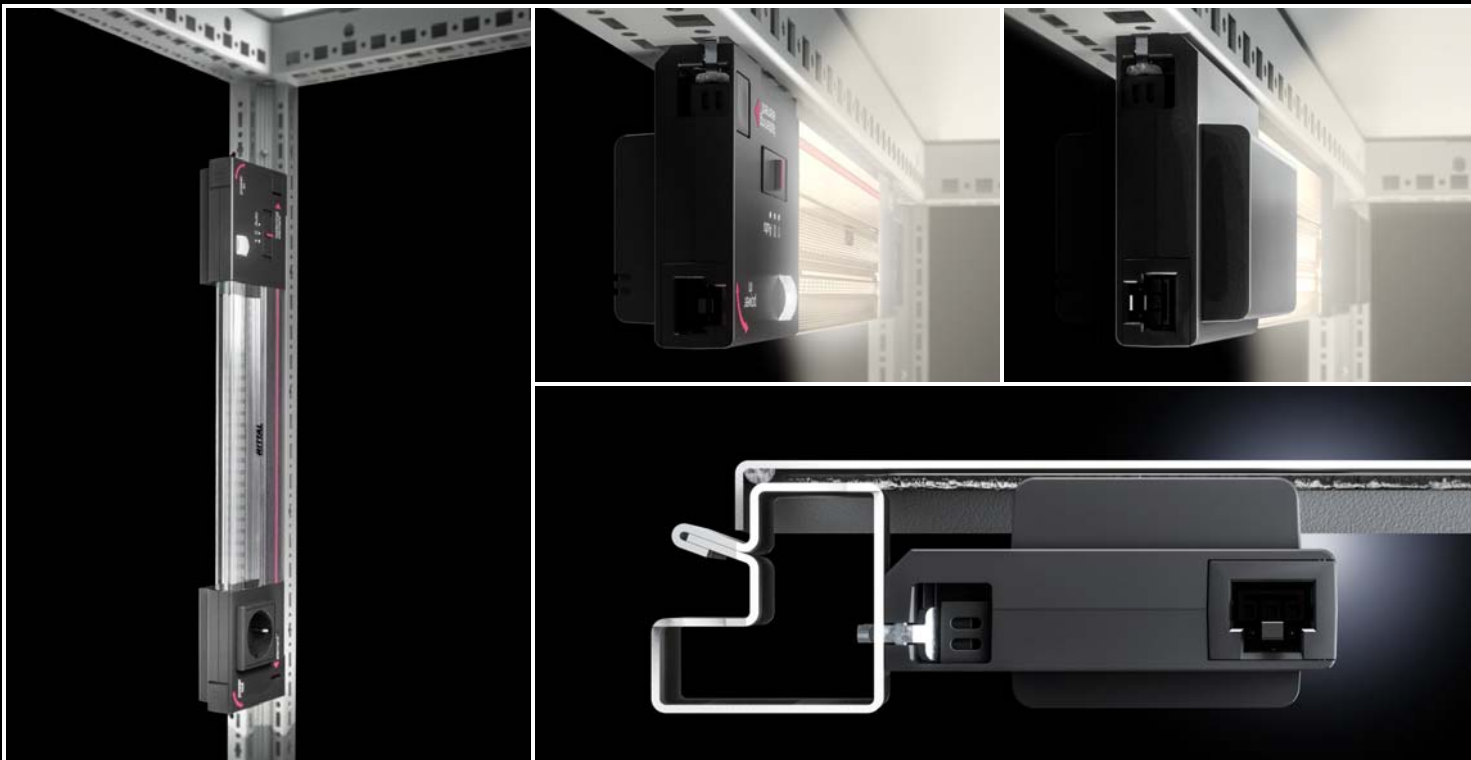

Rittal – The System.


Faster – better – everywhere.



LED system light

Uncompromising switching

- Rotating connectors support installation in the most confined spaces
- Simple through-wiring based on the plug & play system
- Variants with integral motion detectors eliminate the need for installing separate door-operated switches
- If additionally equipped with a socket, electricity will be available whenever it is needed for maintenance work
- Suitable for immediate, global use with wide-range voltage 100 – 240 V (AC) and 24 V (DC)

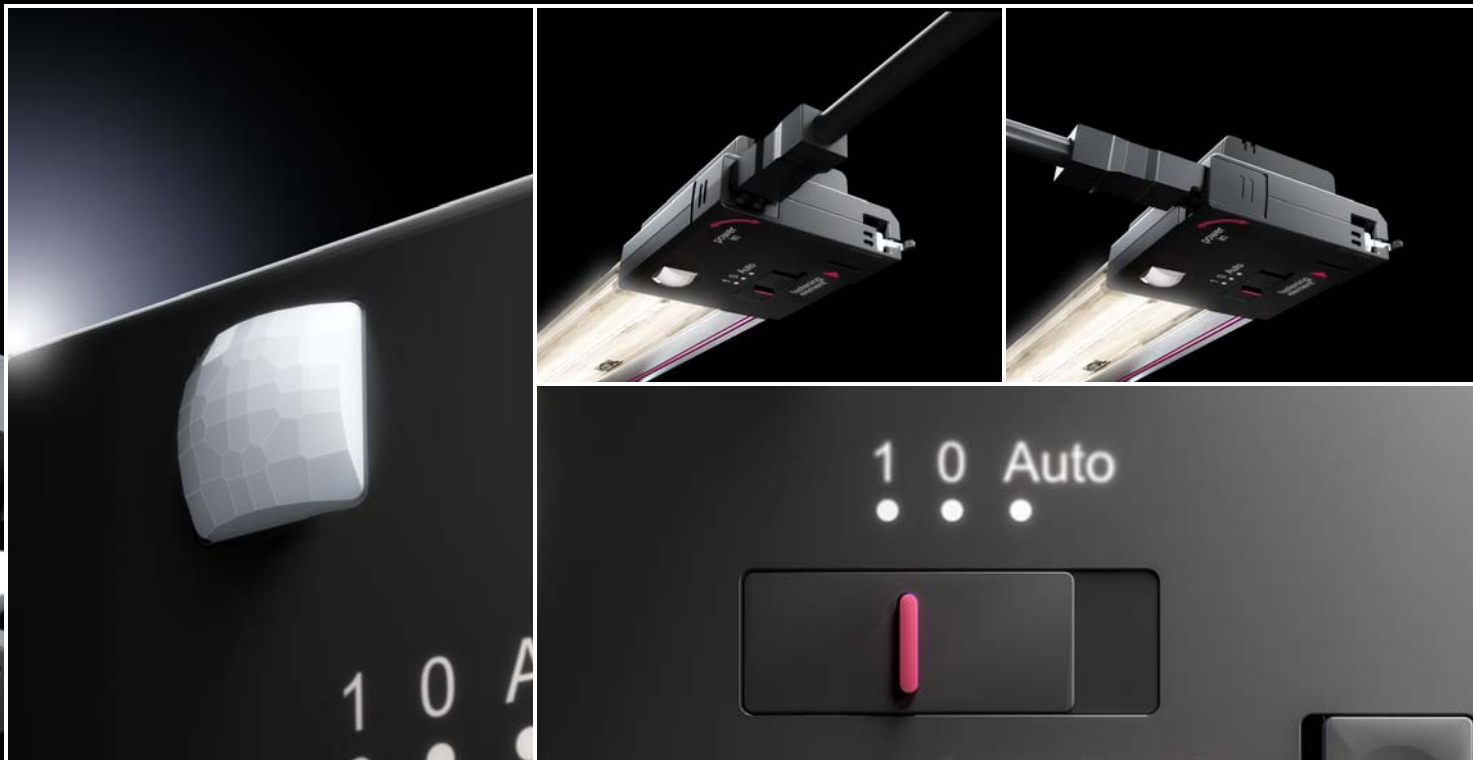

LED system light



Baying systems TS 8 Cat. 34, page 62 **System enclosures SE 8** Cat. 34, page 81

Benefits:

- Optimum illumination of the entire enclosure
- Optionally with clip, screw and magnetic attachment
- A configuration to suit every application

Length:

- 437 mm

Material:

- Plastic
- Aluminium

Colour:

- Enclosure: RAL 7016

Light colour:

- 4000 K (neutral white)

Supply includes:

- Assembly screws






Approvals:

- ENEC

Note:

- Connection accessories should be ordered separately

Available from June 2016

							
Model No.		2500.310	2500.300	2500.210	2500.200	2500.220	Page
Output lumen		1200	1200	900	900	900	
Motion sensor		■	■	–	–	–	
Voltage supply	100 – 240 V AC	■	■	■	■	–	
	24 V DC	–	–	–	–	■	
Equipment	Socket	■	–	■	–	–	
	90° rotating connector	■	■	■	■	■	
	Adjustable light direction	■	■	–	–	–	
	Adjustable light distribution	■	■	■	■	■	
Protection class II (all-insulated)		■	■	■	■	■	
Installation type	Screw-fastening	■	■	■	■	■	
	Clip attachment	■	■	■	■	■	
	Magnetic attachment to surfaces (accessory)	–	■	–	■	■	
Connection options	Infeed	3-pole	3-pole	3-pole	3-pole	2-pole	
	Through-wiring	3-pole	3-pole	3-pole	3-pole	2-pole	
	Door-operated switch (accessories)	–	–	■	■	■	
Mounting options	TS, SE	Screw fastening/clip	Directly on the profile	Directly on the profile	Directly on the profile	Directly on the profile	
	AE	Screw-fastening	With universal bracket	With universal bracket	With universal bracket	With universal bracket	

Accessories

Universal bracket	2373.000	2373.000	2373.000	2373.000	2373.000	Cat. 34, 623
Mounting kit magnet	–	2500.480	–	2500.480	2500.480	11
Rail for interior installation	see page	see page	see page	see page	see page	Cat. 34, 605

Connection accessories

Infeed, 2-pole	–	–	–	–	2500.410	11
Infeed, 3-pole (with socket)	2500.400	2500.400	2500.400	2500.400	–	11
Through-wiring, 2-pole	–	–	–	–	2500.440	11
Through-wiring, 3-pole (with connector and socket)	2500.430	2500.430	2500.430	2500.430	–	11
Door-operated switch	–	–	2500.460	2500.460	2500.460	11
Door-operated switch, UL	–	–	2500.470	2500.470	2500.470	11

Connection accessories

for LED system light

The following components can be used for time-saving and simple installation of the lights:



Accessories:



- Cable ties for quick assembly, see Catalogue 34, page 667

Connection cable for	ENEC	Length mm	Packs of	Model No.	
				Orange	Black
[1] Infeed, 3-pole, 100 – 240 V AC	■	3000	5 pc(s).	2500.400	–
[2] Infeed, 2-pole, 24 V DC	■	3000	5 pc(s).	–	2500.410
[3] Through-wiring, 3-pole, 100 – 240 V AC	■	1000	5 pc(s).	2500.430	–
[4] Through-wiring, 2-pole, 24 V DC	■	1000	5 pc(s).	–	2500.440

Available from June 2016

Door-operated switch With mounting accessories	ENEC	UL	Length mm	Technical specifications	Packs of	Model No.
						Black
[5] Connection cable	■	–	600	230 V AC 1 A	1 pc(s).	2500.460
	–	■	600		1 pc(s).	2500.470

Model No. 2500.460 available from June 2016, Model No. 2500.470 available from August 2016



Mounting kit magnet

for LED system light

For sticking onto the rear of lights without a socket.

Packs of	Model No.
4 pc(s).	2500.480

Available from June 2016

Rittal – The System.

Faster – better – everywhere.

- Enclosures
- Power Distribution
- Climate Control
- IT Infrastructure
- Software & Services

You can find the contact details of all
Rittal companies throughout the world here.



www.rittal.com/contact

SC1610

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES



FRIEDHELM LOH GROUP