


Rittal – The System.

Faster – better – everywhere.

► TopTherm Chiller

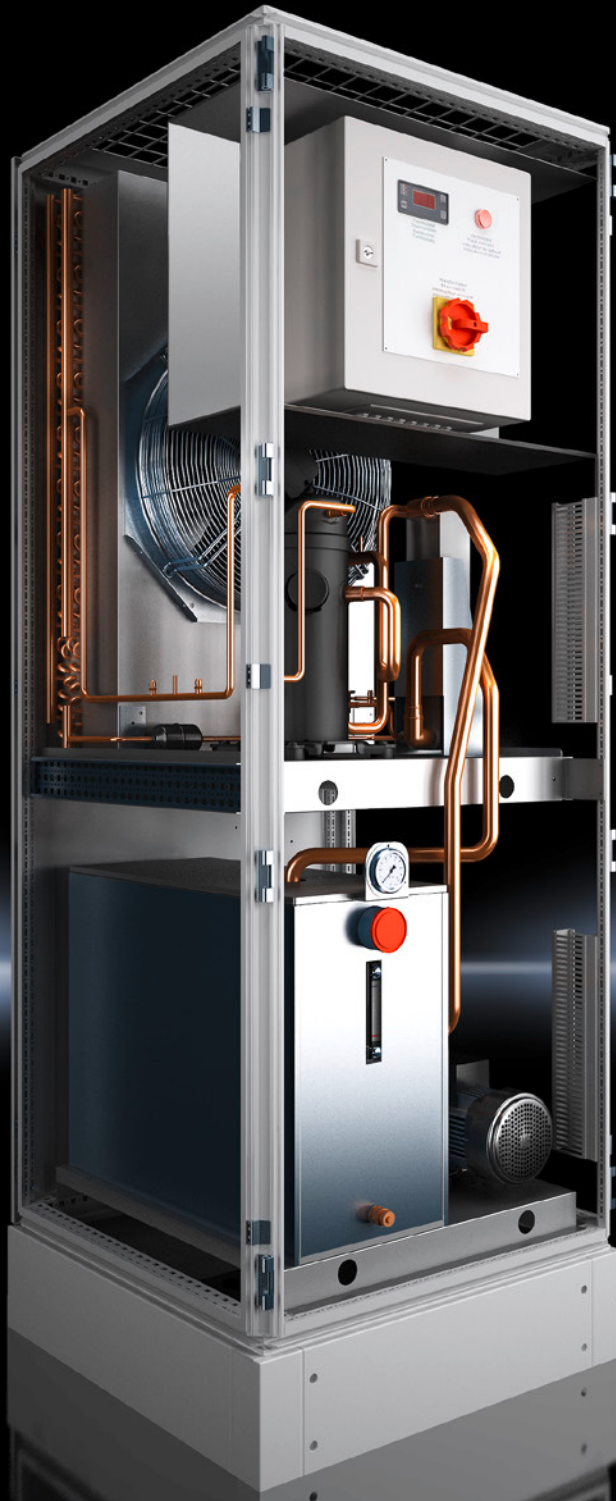

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES



FRIEDHELM LOH GROUP

**Standardized modular design
for quick availability**





Control module

- One version for two frequencies 400 V/50 Hz, 460 V/60 Hz
- Temperature control by way of fixed or differential values, switchable.



Chiller module

- Air intake at rear, optionally also on left or right for the 8, 12, and 16 kW versions
- Refrigerant R410A
- Simple exchanging of modules with different outputs



Water module

- Water bypass as standard
- Flow monitor as standard
- Simple exchanging of modules of different outputs





Advantages

- Modular design
- Small footprint
- Convenient servicing
- High reliability thanks to icing protection
- Dual frequencies for international compatibility
- Base platform readily available from stock

Temperature control:

- Microcontroller control (factory setting +18°C, differential value control also possible)

Color:

- RAL 7035

Protection category IP to IEC 60 529:

- IP 44 (electrics)

Supply includes:

- Complete unit with side panels and door ready for connection
- Multilingual documentation including functional diagram and wiring plans

Note:

- For 3335.880 and 3335.890, two metal filters are required

Characteristic curves of pump:

Available on the Internet

Approvals:

Available on the Internet

Technical details:

Available on the Internet

Power category 27297—54594 BTU (8000—16000 W)

Model No.		3335.790	3335.830	3335.840	3335.850	3335.860	3335.870	3335.880	3335.890
Total cooling output at $T_w = 50^\circ\text{F}/T_u = 90^\circ\text{F}$ BTU (kW)		22179/25591 (6.5/7.5)	22179/25591 (6.5/7.5)	35145/38557 (10.3/11.3)	47088/51865 (13.8/15.2)	56642/63807 (16.6/18.7)	70973/ 81209 (20.8/23.8)	92128/103729 (27/30.4)	110895/127955 (32.5/37.5)
Total cooling output at $T_w = 64^\circ\text{F}/T_u = 90^\circ\text{F}$ BTU (kW)		27297/29344 (8/8.6)	27297/29344 (8/8.6)	40946/44699 (12/13.1)	54594/60054 (16/17.6)	68243/74385 (20/21.8)	85304/94175 (25/27.6)	109189/120107 (32/35.2)	136486/150134 (40/44)
Rated power P_{el} 50/60 Hz BTU (kW)		14911/17777 (4.37/5.21)	14911/17777 (4.37/5.21)	22520/26478 (6.6/7.76)	24909/31392 (7.3/9.2)	31392/40946 (9.2/12)	38898/47429 (11.4/13.9)	51012/60054 (14.95/17.6)	61111/78820 (17.91/23.1)
Rated operating voltage V, ~, Hz		400, 3~, 50 460, 3~, 60	400, 3~, 50 460, 3~, 60	400, 3~, 50 460, 3~, 60	400, 3~, 50 460, 3~, 60	400, 3~, 50 460, 3~, 60	400, 3~, 50 460, 3~, 60	400, 3~, 50 460, 3~, 60	400, 3~, 50 460, 3~, 60
Height inches (mm)		67 (1700)	83 (2100)	84 (2140)	84 (2140)	84 (2140)	84 (2140)	84 (2140)	84 (2140)
Width inches (mm)		32 (805)	32 (805)	32 (805)	32 (805)	47 (1205)	47 (1205)	63 (1605)	95 (2405)
Depth inches (mm)		24 (605)	24 (605)	24 (605)	24 (605)	24 (605)	24 (605)	24 (605)	24 (605)
Rated current max. A		8.2/7.7	8.2/7.7	10/11.4	12.7/13.3	20.1/17.3	22.8/23.8	26.3/26.7	38.4/32.7
Operating temperature range		+50°F...+109°F	+50°F...+109°F	+50°F...+109°F	+50°F...+109°F	+50°F...+109°F	+50°F...+109°F	+50°F...+109°F	+50°F...+109°F
Refrigerant		R410a	R410a	R410a	R410a	R410a	R410a	R410a	R410a
Water connection	1" internal thread	■	■	■	■	■	■	—	—
	1 1/4" internal thread	—	—	—	—	—	—	■	■
Temperature hysteresis		+/- 2 K	+/- 2 K	+/- 2 K	+/- 2 K	+/- 2 K	+/- 2 K	+/- 2 K	+/- 2 K
Liquid temperature		+50°F...+77°F	+50°F...+77°F	+50°F...+77°F	+50°F...+77°F	+50°F...+77°F	+50°F...+77°F	+50°F...+77°F	+50°F...+77°F
Tank capacity gal (l)		19.8 (75)	19.8 (75)	19.8 (75)	19.8 (75)	39.6 (150)	39.6 (150)	19.8 (75)	39.6 (150)
Weight lb (kg)		546.7 (248.0)	546.7 (248.0)	621.7 (282.0)	621.7 (282.0)	793.7 (360.0)	824.5 (374.0)	1126.6 (511.0)	1424.2 (646.0)

TopTherm Chiller



**Chiller module
with air intake from the left**

The variable air intake location allows the chiller to be used in many different application environments



**Chiller module
with air intake from the rear**



**Chiller module
with air intake from the right**



Enclosure suits

Two modules can be combined into a suite to double the cooling capacity. Integration into existing enclosure suites is possible.

Rittal – The System.

Faster – better – everywhere.

- Enclosures
- Power Distribution
- Climate Control
- IT Infrastructure
- Software & Services



From Rittal's newest Blue e+ energy efficient air conditioners to our liquid cooling units, enclosure heaters and climate control accessories, scan this qr code and discover the world of Rittal climate control products.

Rittal Corporation

Woodfield Corporate Center
425 North Martingale Road, Suite 400 • Schaumburg, Illinois 60173 • USA
Phone: 937-399-0500 • Toll-free: 800-477-4000
Email: rittal@rittal.us • Online: www.rittal.us

Rittal Systems Ltd.

6485 Ordan Drive • Mississauga, Ontario L5T 1X2 • Canada
Phone: 905-795-0777 • Toll-free: 800-399-0748
E-Mail: marketing@rittal.ca • Online: www.rittal.ca

Rittal Mexico

Dr. Roberto Gayol 1219-1B • Col. Del Valle Sur, 03100 • Mexico, D.F.
Phone: (+52) (55) 5559-5369 • Toll-free: 01 800 8 Rittal (748.825)
E-Mail: info@rittal.com.mx • Website: www.rittal.com.mx

US335 ■ 10/17

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES



FRIEDHELM LOH GROUP