
Rittal – The System.

Faster - better - everywhere.



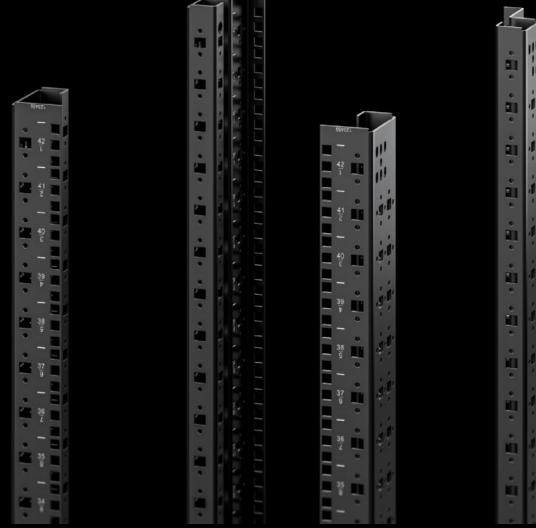

VX_IT 5302.154

482.6 mm (19") mounting angles, dynamic

State: 12/07/2025 (Source: rittal.com/au-en)



VX_IT 5302.154 - 482.6 mm (19") mounting angles, dynamic for VX IT

Mounting angles, also for accommodating server system installation kits.

Features

for 482.6 mm (19") mounting angles, dynamic Suitable for assembling a 482.6 mm (19") mounting level or for
Suitable for assembling a 482 6 mm (19") mounting level or for
482.6 mm (19") partial installation. The L-shaped design can directly accommodate all commercially available mounting kits for server systems, which are fastened directly to the 482.6 mm (19") system punchings.
Integral, bidirectional U labelling Integral system punchings on a U pitch pattern on the front and sides, allows U-specific mounting of cable routing components for structured cabling
Side punchings, round and square, on a U pitch pattern Potential equalisation within the mounting level and with the locating frame is achieved via the assembly components 482.6 mm (19") mounting hole including U centre fixing attachment to standard EIA 310 E
For mounting a 482.6 mm (19") mounting level within the VX IT rack system
Sheet steel, 2.5 mm
Primed
RAL 9005
Assembly parts
front
Alternative installation widths from 21" – 24", depending on the mounting variant and rack dimensions selected

© Rittal 2025

Features

Assembly instruction	To be combined with cross-member, depth stays or mounting bracket for attachment Use of the different mounting options depends on the relevant enclosure dimensions
To fit	Height: = 42 U
Packs of	2 pc(s).
Net weight	11.4
Gross weight	12.04
PCF per pack (cradle-to-gate)	45.9 kg CO2 eq (Cat B)
Note on PCF category	Category B: PCF value (cradle-to-gate) based on the product weight, approximately calculated and self-declared
Customs tariff number	73269098
EAN	4028177955554
ETIM 9	EC002620
ECLASS 8.0	27189261

© Rittal 2025 3