
Rittal – The System.

Faster – better – everywhere.



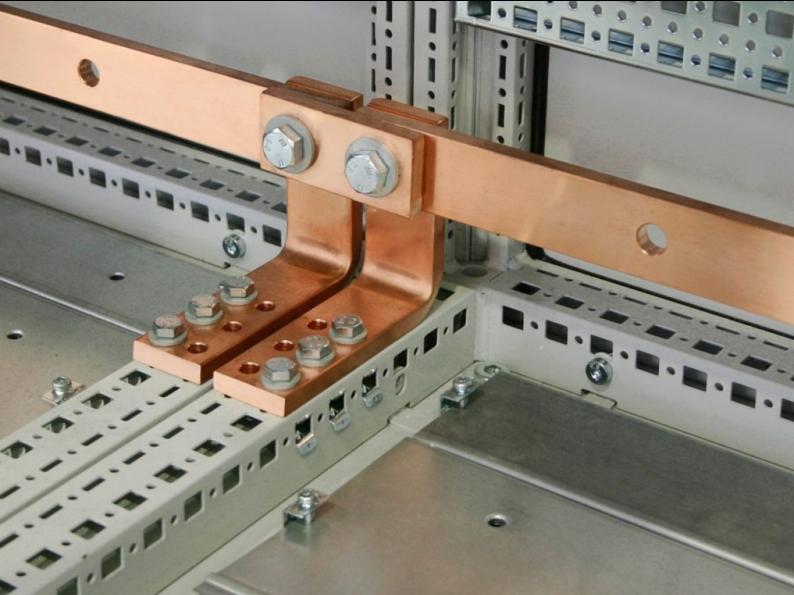

SV 9661.235 PE/PEN combination angle E-Cu

IT INFRASTRUCTURE SOFTWARE & SERVICES

State: 29/07/2025 (Source: rittal.com/au-en)

POWER DISTRIBUTION CLIMATE CONTROL



FRIEDHELM LOH GROUP

ENCLOSURES

SV 9661.235 - PE/PEN combination angle E-Cu for PE/ PEN combinations

The PE/PEN combination, comprising busbars, combination angles and baying brackets, supports type-tested configurations as per IEC 61 439-1.

Features

Model No.	SV 9661.235	
Product description	The PE/PEN combination, comprising busbars, combination angles and baying brackets, supports type-tested configurations as per IE 61 439-1.	
Benefits	Thanks to the pre-assembled combination angles, baying brackets and busbars customised to match the enclosure width, assembly is time-saving with cost reduction	
Applications	Form 2-4 Other	
Material	E-Cu	
Supply includes	Assembly parts	
Approved short-circuit current capability	Icw 18 kA, 1 sec.	
To fit busbars	Busbar E-Cu with integral punchings	
OUT_CROSS_SECTION_COL_SM	30 - 5 mm	
To fit busbars	Width: 30 Height: 5 mm	
Packs of	4 pc(s).	
Net weight	1.156	
Gross weight	1.256	
Copper weight (kg per piece)	0.198	
Customs tariff number	74198090	
EAN	4028177546677	

Features

ETIM 9	EC000329	
ECLASS 8.0	27400605	
Approvals		

Explanations

Declaration of conformity Declaration of conformity UK