
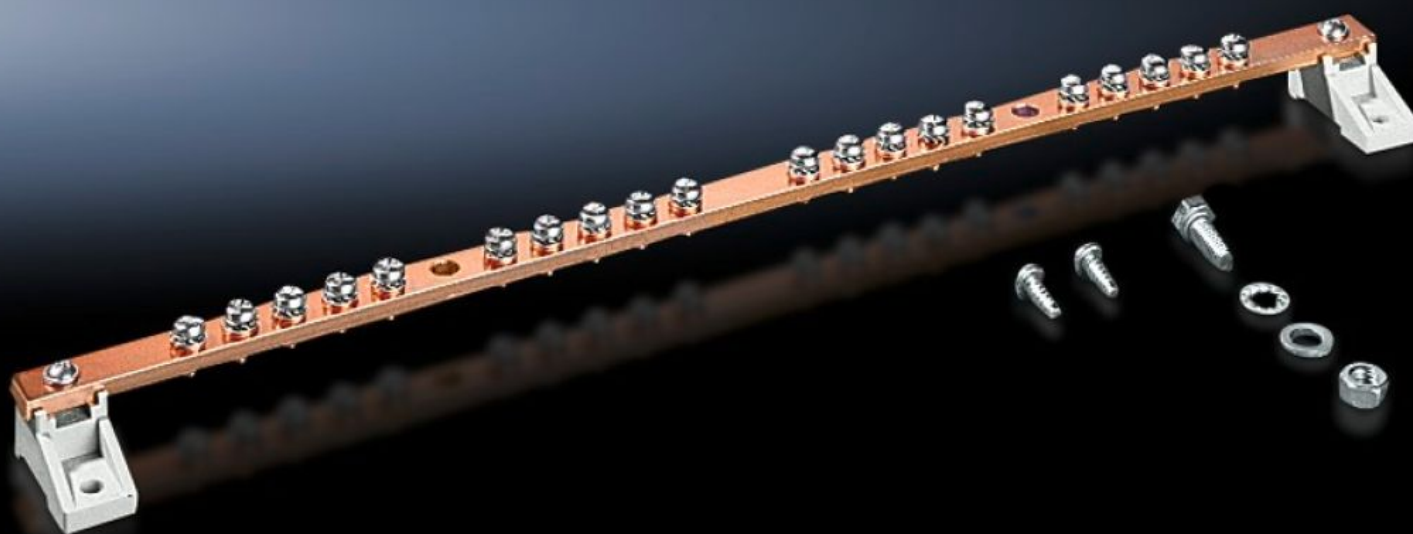


# Rittal – The System.

Faster – better – everywhere.



## DK 7113.000

### Earth rail, horizontal

State: 16.05.2024 (Source: [rittal.com/bg-bg](https://www.rittal.com/bg-bg))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# DK 7113.000 - Earth rail, horizontal for VX, VX SE, VX IT

Potential equalisation rail, current carrying capacity approx. 200 A.

## Features

Model No.	DK 7113.000
Product description	Current carrying capacity approx. 200 A.
Supply includes	Earth rail made from E-Cu 57 to DIN EN 12 163, DIN EN 13 601, 15 x 5 mm 20 connection points with M5 screws 2 earth connections 25 mm <sup>2</sup> 2 isolators Assembly parts
Dimensions	Width: 15 mm Height: 5 mm Length: 450 mm
To fit	Enclosure type: VX VX SE VX IT Width: = 600 mm = 800 mm
Packs of	1 pc(s).
Weight/pack	0,438 kg
Customs tariff number	74198090
EAN	4028177124943
E-Number Sweden	E7239683
ETIM 7.0	EC000329
ECLASS 8.0	27400605

## Approvals

# Approvals

---

Explanations

Manufacturer's declaration

## Tender text

Earth rail / potential equalisation rail

For installing in network enclosures or wall-mounted distribution enclosures. The E-Cu 57 earth rail has two isolators, 20 M5 earth connections and two 25 mm earth connections. The rail's current carrying capacity is 200A.

Earthing rail length: 450 mm