
Rittal – The System.

Faster – better – everywhere.



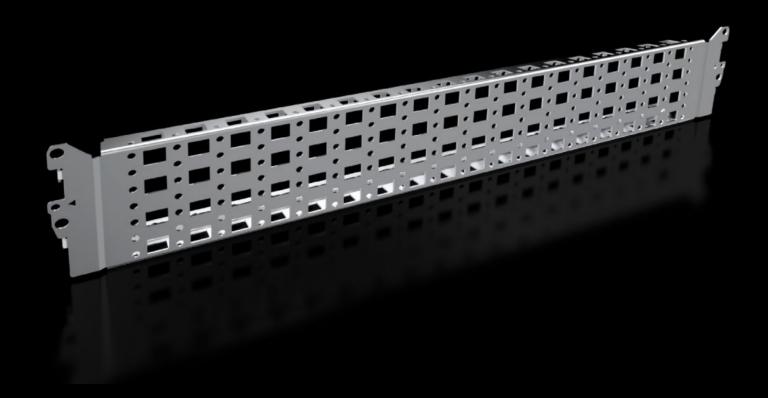

VX 8100.732


Punched section with mounting flange, 23 x 89 mm, stainless steel


State: 08.05.2025 (Source: rittal.com/bg-bg)




VX 8100.732 - Punched section with mounting flange, 23 x 89 mm, stainless steel for VX, VX SE

For variable, individual interior installation of the enclosure frame on the inner mounting level.







Features

Model No.	VX 8100.732
Product description	For variable, individual interior installation of the enclosure frame on the inner mounting level.
Benefits	Simply locate into the system punchings and screw-fasten System punchings on all four sides With slots at the top and bottom for cage nuts, for attaching your own components via metric screws Especially for cable routing in the VX base/plinth, stainless steel and for the installation of busbar supports (non-magnetic stainless steel).
Material	Stainless steel 1.4301 (AISI 304)
Supply includes	Assembly parts
Installation options	In VX on the inner mounting level, on the VX enclosure section In VX SE, on the enclosure section in conjunction with VX adaptor rail On identical punched sections with mounting flanges Base/plinth system VX, stainless steel, in the width and depth, combined with a base/plinth installation bracket

© Rittal 2025

Features

To fit	Enclosure type: VX VX SE To fit width/depth: 600 mm
Packs of	2 pc(s).
Net weight	1.3
Gross weight	1.56
Customs tariff number	73269098
EAN	4028177924611
ETIM 9	EC002620
ECLASS 8.0	27189234

© Rittal 2025 3