


Faster – better – everywhere.



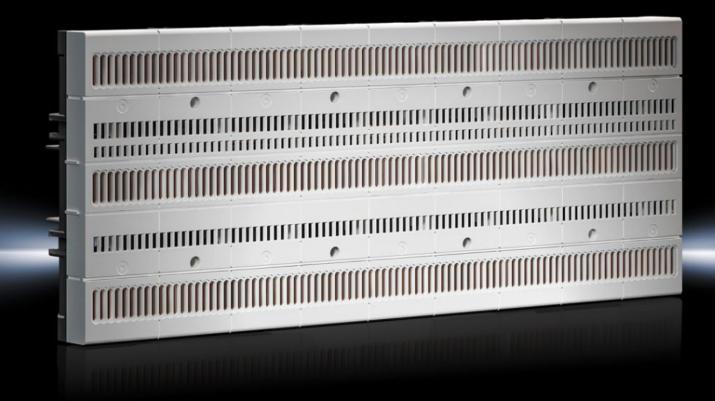

SV 9635.010 Board

State: 13.08.2025 (Source: rittal.com/bg-bg)



POWER DISTRIBUTION >> CLIMATE CONTROL

IT INFRASTRUCTURE SOFTWARE & SERVICES

ENCLOSURES

SV 9635.010 - Board RiLine Compact

Board with integral busbars.

Features

Model No.	SV 9635.010
Function principle	Shock-hazard-protected busbar board for the safe accommodation and contacting of components, thanks to simple plug-in mounting Pre-punched pitch units in the board allow secure, fast positioning of components Reduces wiring work by contacting directly onto the board
Material	Polyamide Polycarbonate E-Cu Fire protection corresponding to UL 94
Colour	RAL 7035
Supply includes	Integral busbars
IP protection category to IEC 60 529	IP 2X
Standards	UL 508 IEC 61 439
Rated current max.	125 A
Rated current (UL)	100 A
Rated operating voltage	690 V (AC) 600 V (DC)
Rated operating voltage (max.) UL	600 V (AC) 600 V (DC)
Max. pitch units @ 45 mm	9
Note	The technical data may vary for UL applications
For mounting on support rails	Yes
for mounting plate assembly	Yes

Features

3-pole
Width: 405 mm Height: 160 mm Depth: 45.1 mm
1 pc(s).
1.3
1.46
0.551
85469010
4028177817401
EC001900
EC001900
27400613

Approvals

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity
	Declaration of conformity UK