
## Rittal – The System.

Faster – better – everywhere.



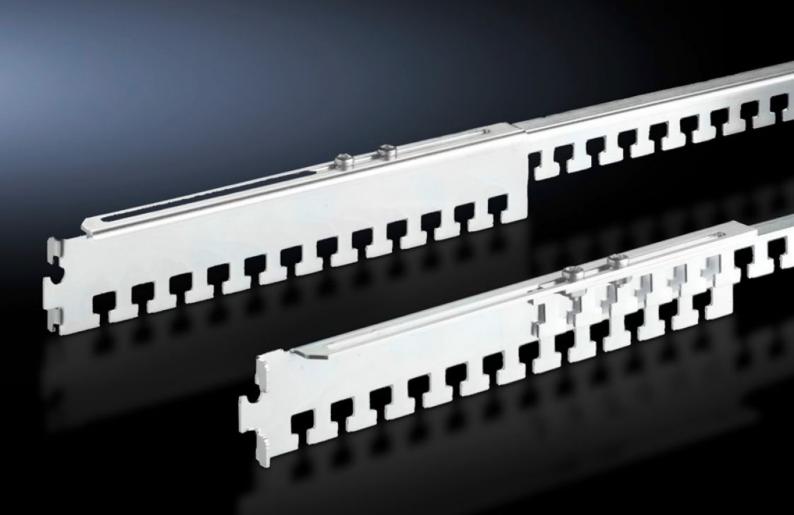

# DK 7858.162 Cable clamp rails, depth-variable

IT INFRASTRUCTURE SOFTWARE & SERVICES

CLIMATE CONTROL

State: 2025-07-27 (Source: rittal.com/ca-en)

POWER DISTRIBUTION



FRIEDHELM LOH GROUP

ENCLOSURES

## DK 7858.162 - Cable clamp rails, depth-variable for TS, TE

For TS and 19" mounting frames, allows flexible adjustment of their length to the fastener spacing between the two 19" mounting frames.



### Features

DK 7858.162 For use with TS and between the profile rails of the TS IT in the enclosure depth. For cable routing on the enclosure frame and for strain relief of the routed cables. The cables can be attached to the cable clamp rails with cable ties or Velcro fasteners. The cable clamp rails can be located horizontally at the rear directly onto a 19" mounting level or in the enclosure depth between two
enclosure depth. For cable routing on the enclosure frame and for strain relief of the routed cables. The cables can be attached to the cable clamp rails with cable ties or Velcro fasteners. The cable clamp rails can be located horizontally at the rear directly
routed cables. The cables can be attached to the cable clamp rails with cable ties or Velcro fasteners. The cable clamp rails can be located horizontally at the rear directly
mounting levels. An additional screw fastening secures the unit. The depth variability of the rails allows their length to be flexibly adapted to the given mounting distance between the two 19" mounting levels.
Carbon steel
Zinc-plated
Mounting accessories
500 - 895 mm
Mounting dimensions + 152 mm = 19" distance between levels
4 pc(s).
1.6
1.7

#### Features

Customs tariff number	73269098
EAN	4028177437388
ETIM 9	EC000322
ECLASS 8.0	27400604