
Rittal – The System.

Faster – better – everywhere.



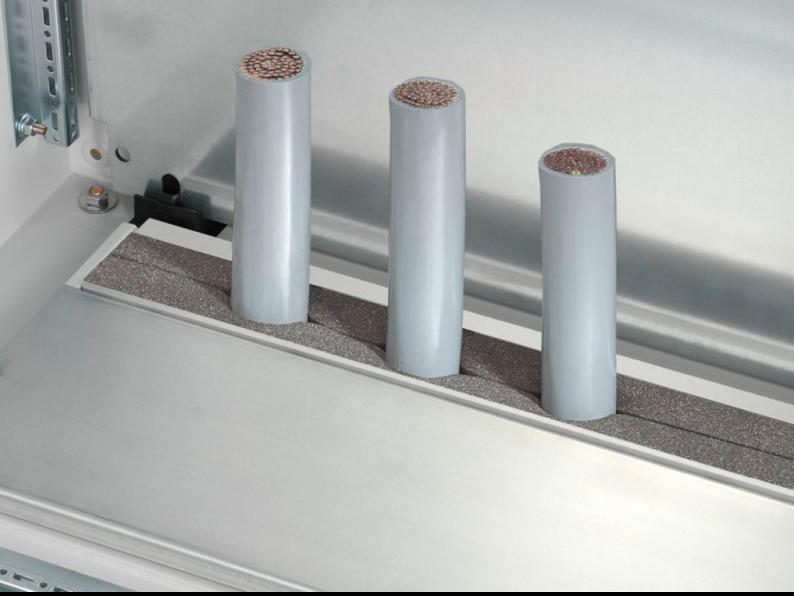

IT INFRASTRUCTURE SOFTWARE & SERVICES

TS 8802.105 Section for cable entry, rear

State: 2025-08-06 (Source: rittal.com/ca-en)

POWER DISTRIBUTION >> CLIMATE CONTROL



FRIEDHELM LOH GROUP

ENCLOSURES

TS 8802.105 - Section for cable entry, rear for TS, TP

Inserted in base opening.

Features

TS 8802.105
To seal the cable entry on the base opening.
Particularly well-suited to cables with identical cross-sections When installing the mounting plate in the rearmost position, the cables may be routed directly without large bending radii.
Foam rubber cable clamping profile: Cross-section: 30 x 25 mm
Mount directly on the base opening/base tray and base plate
Extruded aluminum section Foam rubber cable clamping profile: PU foam
Plug-in sections, incl. foam rubber clamp strip
2 pc(s). are sufficient for one base opening up to an enclosure width of 800 mm From an enclosure width of 1,000 mm, two base openings are provided. 4 units per enclosure may be fitted
Enclosure type: TS: = 1,000 mm Enclosure type: TP
IP 55 if correctly installed
4 pc(s).
0.308
76042990
4028177496378
EC002624
27189265