


Rittal – The System.

Faster – better – everywhere.

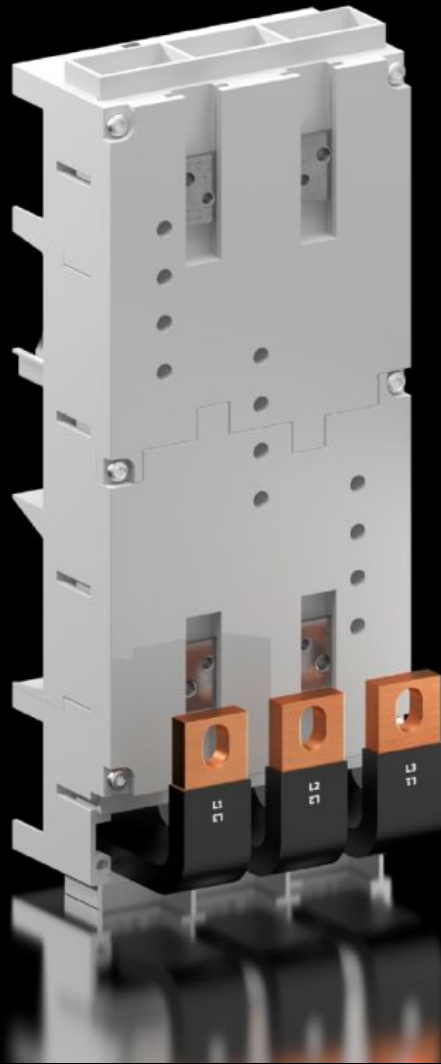

SV 9345.700 Circuit-Breaker Component Adaptors

State: 2025-11-18 (Source: rittal.com/ca-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



SV 9345.700 - Circuit-Breaker Component Adaptors 3-pole

Circuit breaker adaptor for the universal, simplified assembly of circuit-breakers.



Features

| | |
|---|--|
| Model No. | SV 9345.700 |
| Material | Polyamide Fire protection corresponding to UL 94-V0 |
| Color | RAL 7035 |
| Supply includes | Connection straps Sliding Blocks |
| Rated current max. | 630 A |
| Rated operating voltage | 690 V, 3~ |
| Electrical UL ratings (SCCR) | 65 kA - 480 V, circuit breaker max. 600 A, DIVQ/7 |
| Cable outlet | Top |
| For bar systems with center-to-center spacing | 60 mm |
| Note | Cable outlet: Switch outlet or as outgoing cable from the switchgear The technical data may vary for UL applications. |
| Number of poles | 3-pole |
| Note on Model No.: | The 9342.720 insert strip is also required when using Siemens VL630 switchgear |
| Dimensions | Width: 140 mm Height: 345 mm |
| Suitable for busbars | Height: 5, 10 mm |

Features

| | |
|------------------------------|--|
| To fit manufacturer (model) | ABB (S5, T5, T5 UL) Allen Bradley (140U-L) Eaton (NZM3, NZM3 UL/630 A) GE (FG630) Legrand (DPX 630) Mitsubishi (NF630-SEW/HEW/REW) OEZ (BH630N, BH630S) Schneider Electric (NS(X)630, NSJ600) Schrack (MC3) Siemens (VL630, 3VA24, 3VT3, 3V10 73, 3RV13 73, 3RV13 74, 3VA64) Terasaki (E630, S630) |
| Packaging unit | 1 pc(s). |
| Net weight | 3.6 |
| Gross weight | 3.808 |
| Copper weight (kg per piece) | 2.44 |
| Customs tariff number | 85369095 |
| EAN | 4028177680005 |
| ETIM 9 | EC001531 |
| ECLASS 8.0 | 27370304 |

Approvals

| | |
|--------------|--|
| Approvals | ABS DNV-GL Lloyds Register of Shipping UL + C-UL (listed) |
| Explanations | Declaration of conformity Declaration of conformity UK |