


Rittal – The System.

Faster – better – everywhere.

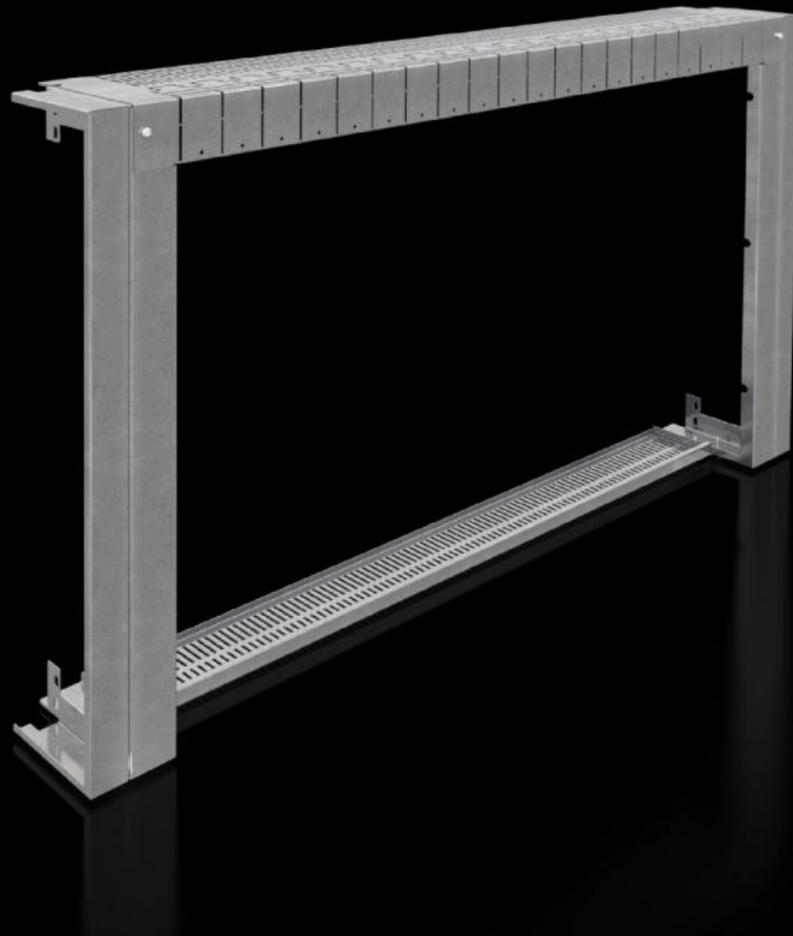

SV 9684.920

Contact hazard protection cover

State: 2026-05-28 (Source: [rittal.com/ca-en](https://www.rittal.com/ca-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



SV 9684.920 - Contact hazard protection cover for enclosures with NH slimline fuse-switch disconnectors

To cover outgoing panels with NH in-line fuse-switch disconnectors making them safe from finger contact.

Features

Model No.	SV 9684.920
Product description	To cover outgoing feeder sections with NH slimline fuse-switch disconnectors and busbar system in the rear enclosure section so that they are safe from finger contact (IP 2X).
Material	Carbon steel, 1.5 mm
Surface finish	Zinc-plated
Supply includes	4 trim panels (left/right sides) 2 trim panels (top/bottom) Assembly components
Usable width for Flat-PLS	1,000 mm
Note	The specified width when installing the contact hazard protection cover only applies when busbar support 9686.060/9686.070 is used
Suitable for	Enclosure type: TS Width: = 1,200 mm
Packaging unit	1 pc(s).
Net weight	7.28 kg
Gross weight	8.28 kg
PCF/VE (cradle-to-gate)	31.5 kg CO2 eq (Cat B)
Information regarding the PCF class	Category B: PCF value (cradle-to-gate) calculated approximately on the basis of the product weight and self-declared
Customs tariff number	73269098
ETIM 9	EC001638
ECLASS 8.0	27142116

Features

Product description

SV Contact hazard protection cover, plate Form 2b (fuse-switch disconnecter, section), for VX (W: 1200 mm)

Approvals

Explanations

Declaration of conformity UK