


Faster – better – everywhere.



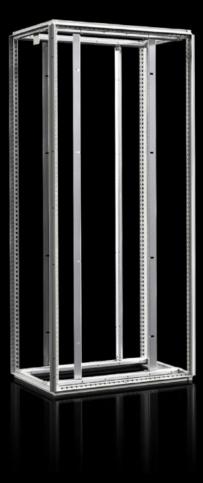

SV 9690.031 Energy storage frame

CLIMATE CONTROL

IT INFRASTRUCTURE SOFTWARE & SERVICES

State: 2025-09-10 (Source: rittal.com/ca-en)

POWER DISTRIBUTION



FRIEDHELM LOH GROUP

ENCLOSURES

SV 9690.031 - Energy storage frame VX ESS

Enclosure frame with flexible interior fitting. Ideal for efficient and modular expansion of energy storage.

Features

Model No.	SV 9690.031
Material	Enclosure frame: Carbon steel, 1.5 mm
	Profile rails: carbon steel, 2 mm
	Cross-member with mounting angle: Sheet steel, 3 mm
Surface finish	Enclosure frame: Dipcoat-primed
	Profile rails: Zinc-plated
	Cross-member with mounting bracket: Zinc-plated
Color	RAL 7035
Supply includes	Enclosure frame
Dimensions	Width: 600 mm
	Height: 2,000 mm
	Depth: 800 mm
Packaging unit	1 pc(s).
Net weight	44
Gross weight	44.4
PCF/VE (cradle-to-gate)	111.06 kg CO2 eq (Cat B)
Information regarding the PCF	Category B: PCF value (cradle-to-gate) calculated approximately on
class	the basis of the product weight and self-declared
EAN	4028177044197
ETIM 9	EC000261