


# Rittal – The System.

Faster – better – everywhere.

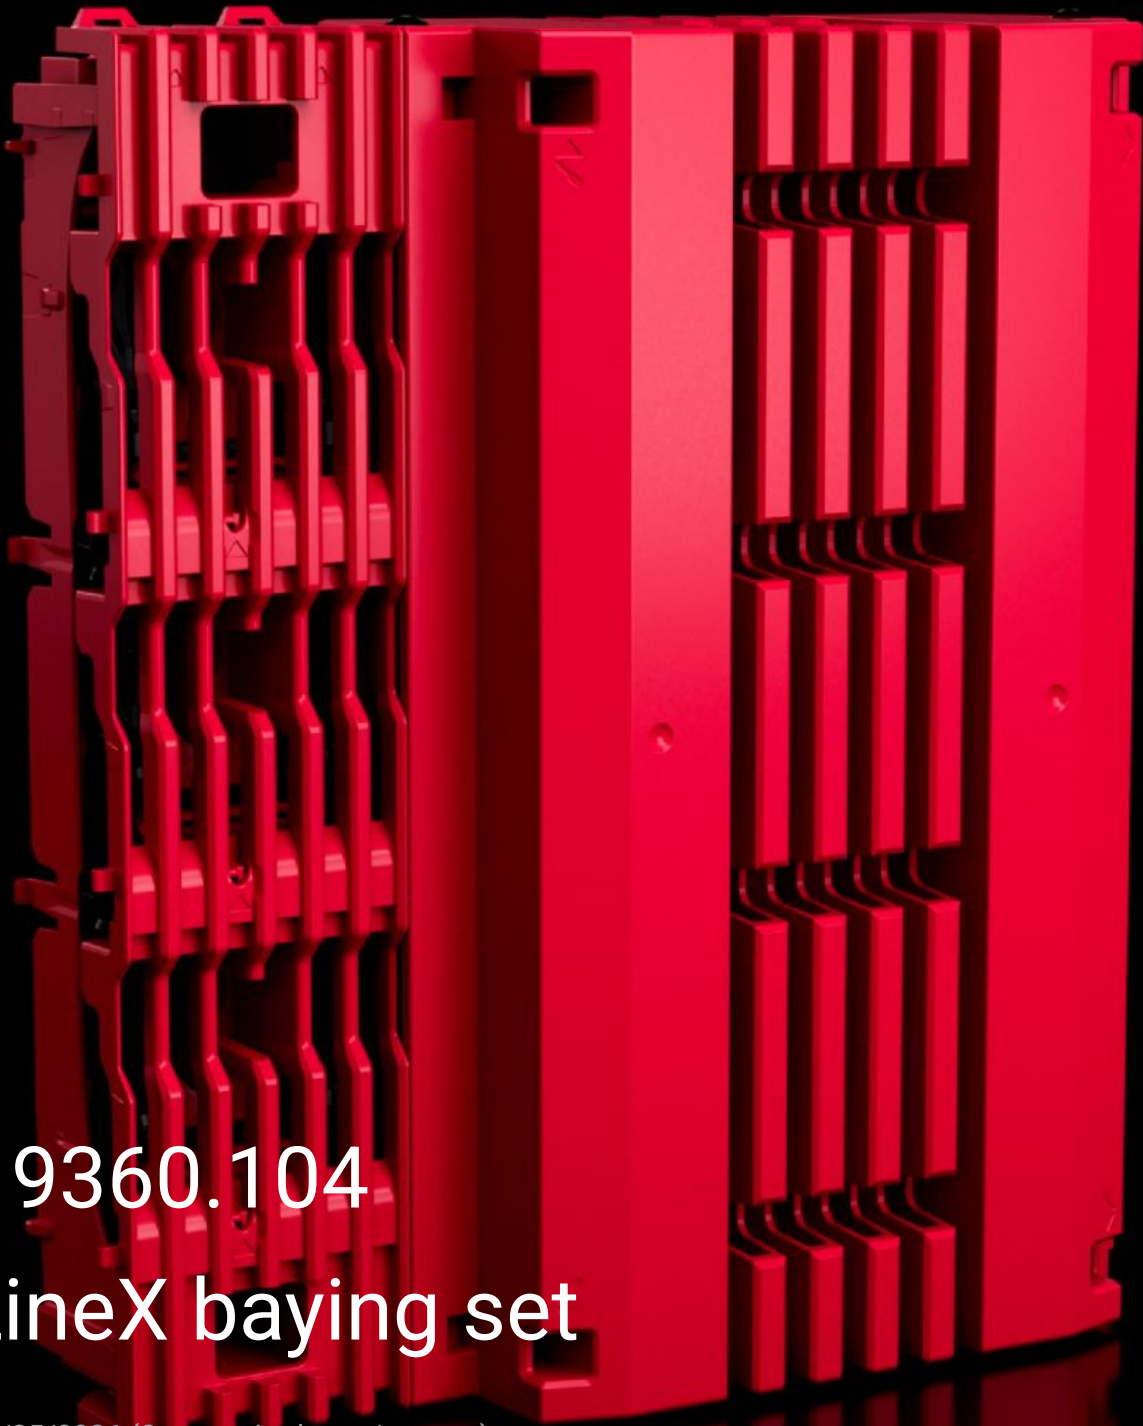

## RX 9360.104 RiLineX baying set

State: 25/05/2026 (Source: [rittal.com/com-en](http://rittal.com/com-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.104 - RiLineX baying set for basic module

RiLineX baying set, 3-pole, long variant, for board baying between two bayed VX enclosures (section baying). Variant including contact hazard protection cover, front and rear. The set is supplied without busbar connectors (9365013). These are available as accessories.



## Features

|                  |  |
|------------------|--|
| Model No.        | RX 9360.104  |
| Benefits         | Scalable system lengths with basic modules<br>Simple assembly<br>Scalable rated currents thanks to variable busbar cross-sections<br>Tested short-circuit resistance up to 65 kA<br>Suitable for applications up to 1000 V AC and up to 1500 V DC<br>Extensive range of system accessories |
| Material         | Polyamide (PA 6)<br>Fire protection corresponding to UL 94   |
| Colour           | RAL 35745  |
| Supply includes  | Board end element, left and right<br>Board module cover<br>Board module base plate<br>Assembly parts   |
| Number of poles  | 3-pole   |
| To fit Model No. | 9365.013<br>9360.110<br>9360.120<br>9360.150   |

# Features

|                                     |  |
|-------------------------------------|--|
| Dimensions                          | Height: 240 mm<br>Depth: 77 mm   |
| IP protection category to IEC 60529 | IP 2XB   |
| Packs of                            | 2 pc(s).   |
| Net weight                          | 1.46 kg  |
| Gross weight                        | 1.481 kg   |
| PCF per pack (cradle-to-gate)       | 8.06   |
| Customs tariff number               | 85369010   |
| ETIM 9                              | EC002270   |
| Product description                 | RiLineX baying set, 3-pole, long variant, for board baying between two bayed VX enclosures (section baying). Variant including contact hazard protection cover, front and rear. Supply includes one end element left and right plus one base plate, a cover and assembly parts. The set is supplied without busbar connectors. These are available separately. |

# Approvals

|              |  |
|--------------|--|
| Approvals    | UL + C-UL (listed)                           |
| Explanations | Declaration of conformity<br>PCF-declaration |

# Tender text

RiLineX Anreih-Set für Basismodul (lang)

RiLineX baying set, short version, including contact hazard protection cover. Used for baying two boards in a compact arrangement. The set is supplied without busbar connectors (9365013).

For voltages up to 1000 V AC and 1500 V DC.

Tested short-circuit resistance up to 65 kA.

IEC and UL approved.

Product information

Number of poles: 3

Busbar dimensions: 15/20/30 mm x 5/10 mm

Rated current max.: 550/800 A

Dimensions: 210 mm x 246 mm x 49,2 mm (WxHxD)

Manufacturer: Rittal GmbH & Co. KG

Type: 9360104