


Faster – better – everywhere.



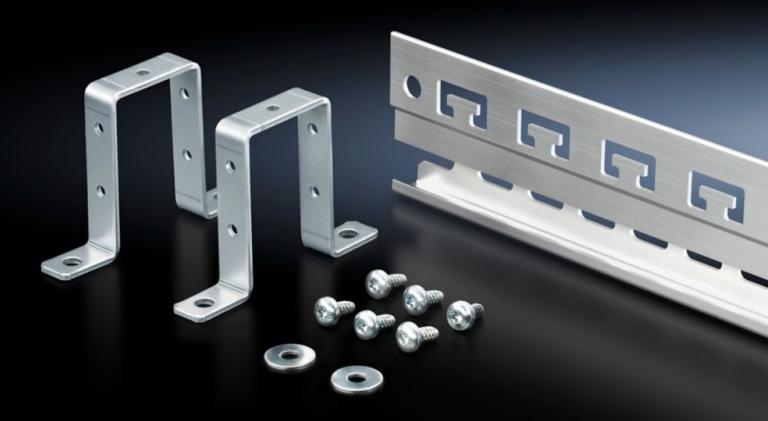

SZ 2388.650 Rail

State: 15.08.2025. (Source: rittal.com/hr-hr)



POWER DISTRIBUTION >> CLIMATE CONTROL


TI INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

ENCLOSURES

SZ 2388.650 - Rail for EMC shielding bracket and strain relief

Combined rail for strain relief and EMC contacting of inserted cables.

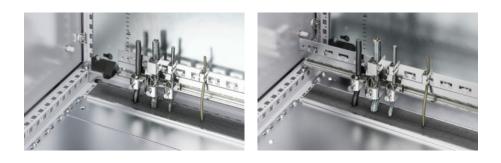

Features

SZ 2388.650
C rail to accommodate cable clamps
T-head cut-outs on a 40 mm pitch pattern for cable clamping using cable ties
Combined rail for strain relief and EMC contacting of inserted cables.
Additional contacting on the left or right of the rail via existing holes (9 mm diameter)
Prepared for tool-free mounting of EMC shielding brackets
Extruded aluminium section
Chromium-free passivated
1 rail
2 retaining brackets
Assembly parts
553 mm
on the horizontal/vertical enclosure section
may also be fitted without a retaining bracket on a mounting plate
Enclosure type: VX
TS
Width: = 600 mm
1 pc(s).

Features

Net weight	0.5
Gross weight	0.58
Customs tariff number	76042990
EAN	4028177698918
ETIM 9	EC002625
ETIM 8	EC002625
ECLASS 8.0	27189234