


Rittal – The System.

Faster – better – everywhere.



SK 3108.024 Enclosure internal fan

State: 08.07.2026. (Source: rittal.com/hr-hr)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



SK 3108.024 - Enclosure internal fan

To prevent hot-spots inside the enclosure and support the air routing of active enclosure climate control components.

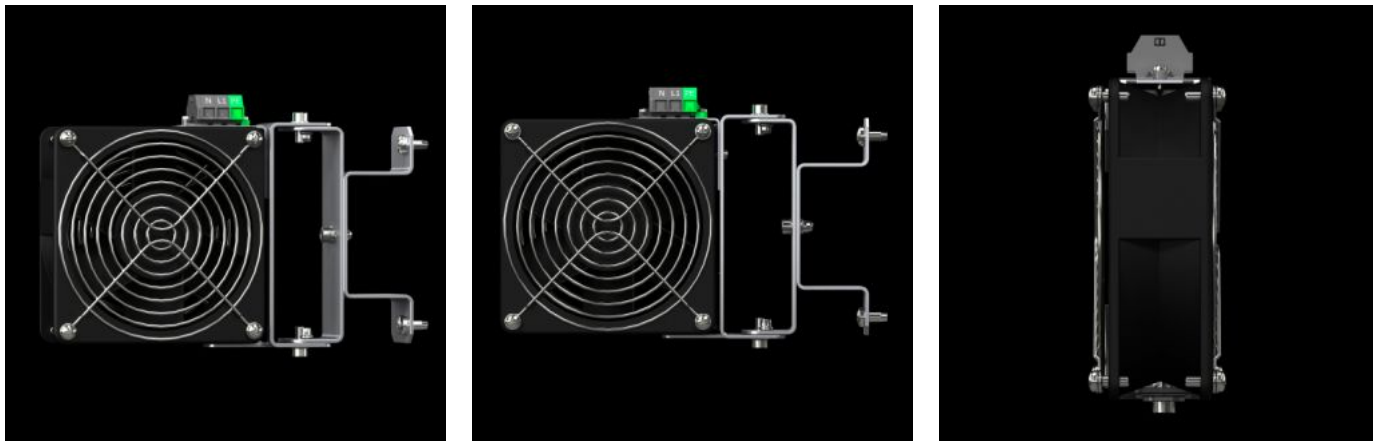

Features

| | |
|-------------------------|--|
| Model No. | SK 3108.024 |
| Product description | To prevent hot-spots and support the air routing of active enclosure climate control components. Adjustable in two axes. Attached to the frame section. Several fans may be cascaded using the quick-release clamping strip. |
| Supply includes | Complete unit with axial fan ready for connection Snap-on pivot device Assembly parts |
| Rated operating voltage | 24 V (DC) |
| Power consumption Pel | With DC: 3.5 W |
| Rated current max. | With DC: 0.15 A |
| Packs of | 1 pc(s). |
| Net weight | 0,8 kg |
| Gross weight | 0,978 kg |
| Customs tariff number | 84145915 |
| ETIM 9 | EC000320 |
| ETIM 8 | EC000320 |

Features

ECLASS 8.0

27180716

Product description

SK enclosure internal fan, 3.5 W, 24 V (DC)

Approvals

Explanations

Declaration of conformity