
Rittal – The System.

Faster – better – everywhere.



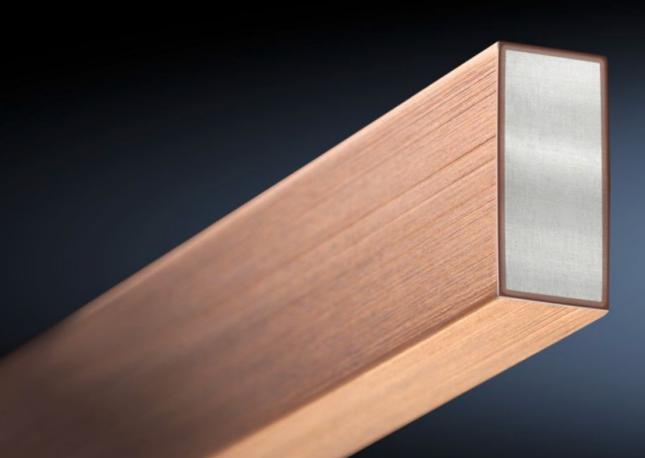

SV 3584.020 CUPONAL busbars

State: 27.06.2025. (Source: rittal.com/hr-hr)



POWER DISTRIBUTION >> CLIMATE CONTROL


IT INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

ENCLOSURES

SV 3584.020 - CUPONAL busbars

Copper-coated aluminium busbar

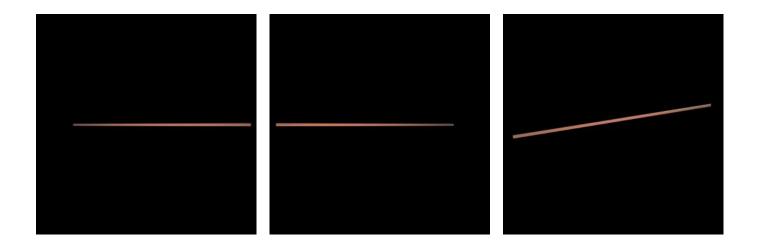

Features

Model No.	SV 3584.020
Product description	Copper-coated aluminium busbars, suitable for configuring busba systems with busbar supports 9340.000/9340.050.
Material	Aluminium
	Copper
Length	2.400 mm
Rated current max.	328 A
Note	The rated current is derived at 65 $^\circ$ C bar temperature and 35 $^\circ$ C
	ambient temperature
	Correction factor diagram to DIN EN 43 671
	May be cut individually to required length
Standards	DIN EN 13 601
Cross-section	30 mm x 5 mm
Dimensions	Length: 2,400 mm
Packs of	6 pc(s).
Net weight	53.7
Copper weight (kg per piece)	0.52
Customs tariff number	74071000

Features

EAN	4028177686571
ETIM 9	EC001522
ETIM 8	EC001522
ECLASS 8.0	27370303

Approvals

Explanations

Declaration of conformity Declaration of conformity UK