

# Rittal – The System.

Faster – better – everywhere.



## DK 7111.900 Cable shunting ring

State: 23.05.2026. (Source: [rittal.com/hr-hr](http://rittal.com/hr-hr))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# DK 7111.900 - Cable shunting ring

For flexible, system-compatible cable routing at the side of the 482.6 mm (19") mounting angles.

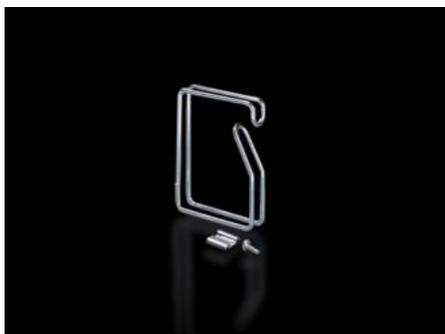

## Features

|                               |  |
|-------------------------------|--|
| Model No.                     | DK 7111.900  |
| Product description           | For flexible, system-compatible cable routing at the side of the 482.6 mm (19") mounting angles.               |
| Material                      | Steel  |
| Surface finish                | Zinc-plated  |
| Supply includes               | Assembly parts   |
| Dimensions                    | Height: 85 mm<br>Depth: 125 mm   |
| Packs of                      | 10 pc(s).  |
| Net weight                    | 0,95 kg  |
| Gross weight                  | 0,991 kg   |
| PCF per pack (cradle-to-gate) | 5.3 kg CO2 eq (Cat B)  |
| Note on PCF category          | Category B: PCF value (cradle-to-gate) based on the product weight, approximately calculated and self-declared |
| Customs tariff number         | 83024200   |
| ETIM 9                        | EC000322   |
| ECLASS 8.0                    | 27400604   |
| Product description           | DK Cable shunting ring, TxH: 125x85 mm   |

# Tender text

Cable shunting ring, zinc-plated, passivated

The zinc-plated, passivated cable shunting rings, made from HxD 85 x 125 mm steel sheet, are fitted on telecommunication system strips or direct in telecommunication distribution enclosures and support the flexible, system-compatible cable routing.

Material: Sheet steel, zinc-plated, passivated

Dimensions: HxD 85 x 125 mm

Packs of 10