


Faster – better – everywhere.



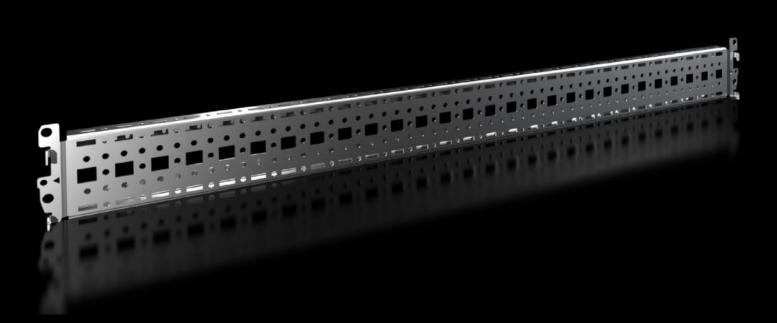

VX 8617.030 Punched section with mounting flange, 18 x 64 mm

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

State: 25.08.2025. (Source: rittal.com/hr-hr)

POWER DISTRIBUTION




FRIEDHELM LOH GROUP

ENCLOSURES

VX 8617.030 - Punched section with mounting flange, 18 x 64 mm for VX

For variable, individual interior installation of the enclosure frame on the outer mounting level.

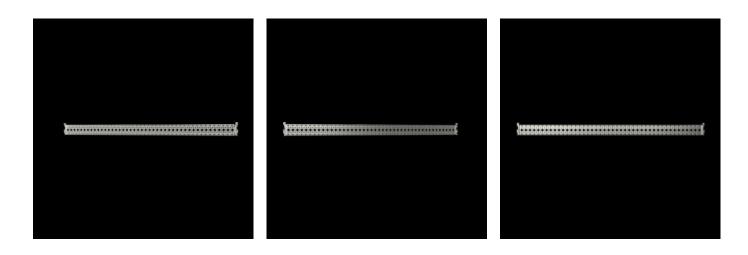

Features

| Model No. | VX 8617.030 |
|----------------------|--|
| Product description | For variable, individual interior installation of the enclosure frame or the outer mounting level. |
| Benefits | Simply locate into the system punchings from the outside and screw-fasten |
| | System punchings on all four sides |
| | With pre-bayed enclosures, the punched sections with mounting |
| | flanges may also be fitted from the inside of the enclosure |
| Material | Sheet steel |
| Surface finish | Zinc-plated |
| Supply includes | Assembly parts |
| Installation options | On the outer mounting level, on the enclosure section |
| | On the outer mounting level, between two punched sections with |
| | mounting flanges 23 x 64 mm |
| To fit | Enclosure type: VX |
| | To fit width/depth: 600 mm |
| Packs of | 4 pc(s). |
| | |

Features

| Net weight | 2.2 |
|-----------------------|---------------|
| Gross weight | 2.52 |
| Customs tariff number | 73269098 |
| EAN | 4028177829060 |
| ETIM 9 | EC002620 |
| ECLASS 8.0 | 27189234 |