

# Rittal – The System.

Faster – better – everywhere.



## RX 9360.705

## RiLineX component support

State: 06.04.2026. (Source: [rittal.com/hr-hr](http://rittal.com/hr-hr))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE



SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# RX 9360.705 - RiLineX component support without contact system

RiLineX component support in width 45 mm for RiLineX and 60 mm busbar system platforms, without contact system. Ideal for securing wider equipment onto the board.

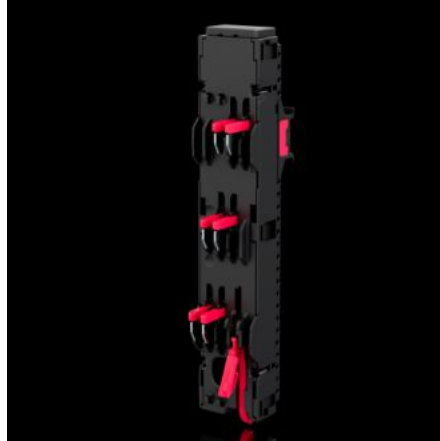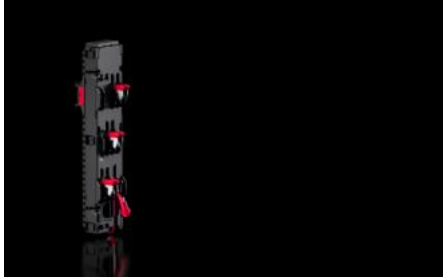

## Features

Model No.	RX 9360.705
Design	without contact system
Benefits	For mounting equipment for top hat rail installation, e.g. motor starter Simple clip locking for support rails Optional anti-slip guard Coordinated accessories reduce the number of different items required Snap-on mounting and simple adjustment for busbar thickness (5/10 mm)
Material	Polyamide (PA 6) Fire protection corresponding to UL 94
Colour	RAL 9005
For bar systems with centre-to-centre spacing	60 mm
Dimensions	Width: 45 mm Height: 239.4 mm Depth: 36.2 mm

# Features

To fit busbars	15 x 5/10 20 x 5/10 30 x 5/10
To fit busbar system	RiLineX RiLine60
Number of poles	3-pole
Support rails Qty	1
Rated voltage	690 V AC 600 V AC (UL) 600 V DC (UL)
Packs of	4 pc(s).
Net weight	1,16 kg
Gross weight	1,2 kg
Customs tariff number	85369095
ETIM 9	EC001531
Product description	RiLineX component support in width 45 mm for RiLineX and 60 mm busbar system platforms, without contact system. Ideal for securing wider equipment onto the board.

# Approvals

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity PCF-declaration

# Tender text

RiLineX component adaptor without contact system

Device adapters for mounting protective and switching devices

for 60 mm busbar systems.

The device is mounted on a pre-assembled, adjustable mounting rail.

For voltages up to 690 V AC and 690 V DC.

IEC and UL approved.

Product information

Number of poles: 3 (without contact system)

Busbar dimensions: 15/20/30 mm x 5/10 mm

Rated current: N/A

Connection: N/A

Dimensions: 45 mm x 240 mm x 37 mm (WxHxD)

Manufacturer: Rittal GmbH & Co. KG

Type: 9360705