
Rittal – The System.

Faster – better – everywhere.



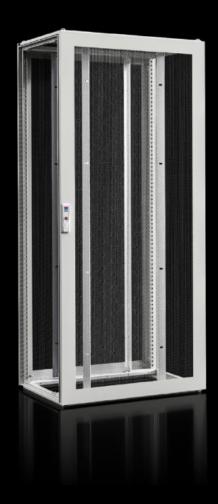

SV 9690.043 Energy storage enclosure

State: 09.12.2025. (Source: rittal.com/hr-hr)



SV 9690.043 - Energy storage enclosure VX ESS

Enclosure frame with roof plate, perforated door and rear panel. With flexible interior fit-out. Ideal for efficient and modular energy storage installation with slide rails.

Features

Model No.	SV 9690.043
Design	With flexible interior fit-out
Material	Enclosure frame: Sheet steel, 1.5 mm
	Roof plate: Sheet steel, 1.5 mm
	Door: Sheet steel, 1.5 mm
	Rear panel: Sheet steel, 1.5 mm
Surface finish	Enclosure frame: Dipcoat-primed
	Door, roof and rear panel: Powder-coated, textured paint
Colour	RAL 7035
Supply includes	Enclosure frame
	Door and rear panel, perforated
	Roof plate
	Lock: 3 mm double-bit
Protection category to IEC 60 529	IP 20
Dimensions	Width: 800 mm
	Height: 2,000 mm
	Depth: 800 mm
PCF per pack (cradle-to-gate)	290.48 kg CO2 eq (Cat B)
Note on PCF category	Category B: PCF value (cradle-to-gate) based on the product weight, approximately calculated and self-declared
	approximately calculated and self-declared
EAN	4028177044319
ETIM 9	EC000261

Approvals

© Rittal 2025

Approvals

Explanations

Declaration of conformity

© Rittal 2025 3