

Faster - better - everywhere.





IT 7100.120 OCP ORV3 rack

State: 14/08/2025 (Source: rittal.com/ie-en)

POWER DISTRIBUTION CLIMATE CONTROL IT INFRASTRUCTURE SOFTWARE & SERVICES




FRIEDHELM LOH GROUP

ENCLOSURES

IT 7100.120 - OCP ORV3 rack

OCP is an ambitious international community that aims to simplify and optimise IT infrastructure. The Rittal OCP ORV3 rack is OCP accepted and ready for immediate use. Simple modifications and enhancements can be made as and when required, thanks to the range of accessories. The OCP ORV3 rack can also accommodate a Direct Liquid Cooling (DLC) solution. Take your efficiency and performance density to a whole new level with this rack.

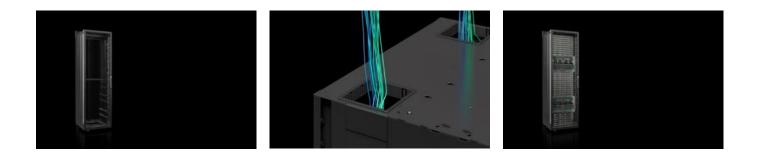

Features

Model No.	IT 7100.120
Design	Open frame
	Prepared for cable entry in roof and base
	Cable routing at the front, across the full height
Benefits	OCP ORV3 rack open on all sides and in line with Standard V3 of the
	OCP Community
	Prepared to accommodate 21" OCP components and direct contact on the busbar
	Rapid construction and service thanks to click-in fitting of the IT and
	IT OCP Power rail system
	End-to-end cable management in front rack over full height
	Ideal for high-performance computing and AI technology thanks to
	being ready for Direct Liquid Cooling solutions that are designed to
	dissipate the thermal load generated in the rack
	Load capacity up to 1400 kg
	Integrated heavy-duty castors make transportation easier and
	ensure ease of handling in the data centre
Technical specifications	Rated operating voltage: 48 V DC / power consumption 18 kW
Material	Sheet steel
Surface finish	Dipcoat-primed, powder-coated on the outside

Features

ColourRAL 9005Supply includesOCP ORV3 rack OCP busbar for max. 48 DC/18 kW 2 bracing struts, pre-assembled Levelling feet, pre-assembled 4 castors (freely rotating) Baying seal Air baffle plateDimensionsWidth: 600 mm Height: 2,286 mm Depth: 1,068 mmUnits44 OULoad capacity14,000 NBasic materialSheet steelPacks of1 pc(s).Net weight172Gross weight200Customs tariff number94032080ETIM 9EC002499ETIM 8EC002499ETIM 8EC002499ECLASS 8.027180207		
OCP busbar for max. 48 DC/18 kW 2 bracing struts, pre-assembled Levelling feet, pre-assembled 4 castors (freely rotating) Baying seal Air baffle plateDimensionsWidth: 600 mm Height: 2,286 mm Depth: 1,068 mmUnits44 OULoad capacity14,000 NBasic materialSheet steelPacks of1 pc(s).Net weight172Gross weight200Customs tariff number94032080EAN4028177997738ETIM 9EC002499ETIM 8EC002499	Colour	RAL 9005
Height: 2,286 mm Depth: 1,068 mmUnits44 OULoad capacity14,000 NBasic materialSheet steelPacks of1 pc(s).Net weight172Gross weight200Customs tariff number94032080EAN4028177997738ETIM 9EC002499ETIM 8EC002499	Supply includes	OCP busbar for max. 48 DC/18 kW 2 bracing struts, pre-assembled Levelling feet, pre-assembled 4 castors (freely rotating) Baying seal
Load capacity14,000 NBasic materialSheet steelPacks of1 pc(s).Net weight172Gross weight200Customs tariff number94032080EAN4028177997738ETIM 9EC002499ETIM 8EC002499	Dimensions	Height: 2,286 mm
Basic materialSheet steelPacks of1 pc(s).Net weight172Gross weight200Customs tariff number94032080EAN4028177997738ETIM 9EC002499ETIM 8EC002499	Units	44 OU
Packs of1 pc(s).Net weight172Gross weight200Customs tariff number94032080EAN4028177997738ETIM 9EC002499ETIM 8EC002499	Load capacity	14,000 N
Net weight172Gross weight200Customs tariff number94032080EAN4028177997738ETIM 9EC002499ETIM 8EC002499	Basic material	Sheet steel
Gross weight200Customs tariff number94032080EAN4028177997738ETIM 9EC002499ETIM 8EC002499	Packs of	1 pc(s).
Customs tariff number 94032080 EAN 4028177997738 ETIM 9 EC002499 ETIM 8 EC002499	Net weight	172
EAN 4028177997738 ETIM 9 EC002499 ETIM 8 EC002499	Gross weight	200
ETIM 9 EC002499 ETIM 8 EC002499	Customs tariff number	94032080
ETIM 8 EC002499	EAN	4028177997738
	ETIM 9	EC002499
ECLASS 8.0 27180207	ETIM 8	EC002499
	ECLASS 8.0	27180207

Approvals

Approvals	IEC CB UL + C-UL (listed)
Explanations	Declaration of conformity