


Faster – better – everywhere.



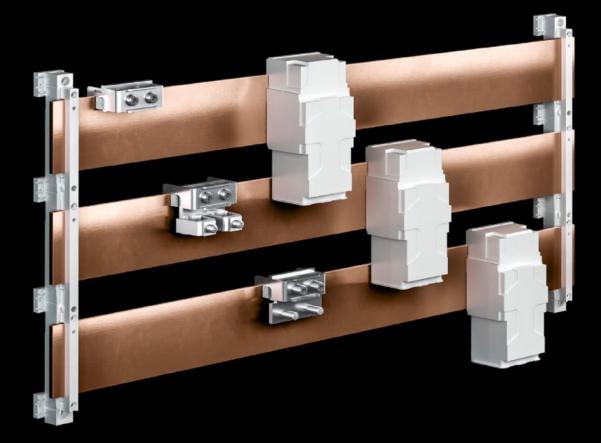

SV 9677.910 Connection block

State: 3/09/2025 (Source: rittal.com/ie-en)



POWER DISTRIBUTION >> CLIMATE CONTROL

IT INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

ENCLOSURES

SV 9677.910 - Connection block

For connecting cables and laminated copper bars.

Features

Model No.	SV 9677.910
Product description	For connecting cables and laminated copper bars.
Material	Sheet steel, zinc-plated E-Cu, tin-plated
Clamping area height	20 mm
Clamping area width	80 mm
Cable outlet	Top/bottom
Rated current max.	1,600 A
Dimensions	Width: 98 mm
To fit busbars	Height: 10 mm
Packs of	1 pc(s).
Net weight	0.9
Gross weight	0.982
Copper weight (kg per piece)	0.689
PCF per pack (cradle-to-gate)	3.7 kg CO2 eq (Cat B)
Note on PCF category	Category B: PCF value (cradle-to-gate) based on the product weight, approximately calculated and self-declared
Customs tariff number	85369095
EAN	4028177705302
ETIM 9	EC002270
ECLASS 8.0	27400613

Approvals

Approvals	UL + C-UL (listed)
Explanations	Declaration of conformity Declaration of conformity UK