


Faster – better – everywhere.



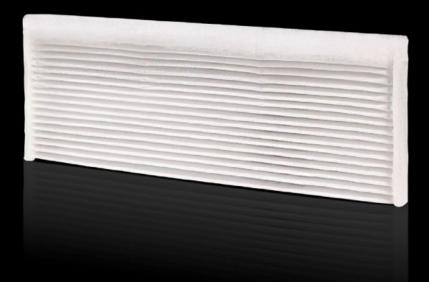

IT INFRASTRUCTURE SOFTWARE & SERVICES

SK 3174.120 Pleated filter

State: 17/08/2025 (Source: rittal.com/nz-en)

POWER DISTRIBUTION SCIENCE CONTROL




FRIEDHELM LOH GROUP

ENCLOSURES

SK 3174.120 - Pleated filter for fan-and-filter units, roofmounted fans, cooling units and chillers

The high-quality pleated filter technology permits a significant increase in the volumetric air flow compared to conventional chopped-fibre filter mats. Cooling unit performance is improved and energy consumption is lower. The enhanced filtration properties also mean less dust in the enclosure or unit, and the resulting longer maintenance intervals reduce service costs significantly.



Features

Model No.	SK 3174.120
Design	for roof-mounted fans
Material	Pleated filter: Based on polyester, meltblown polycarbonate
Note	Performance data, protection category and device approvals are only guaranteed when used in conjunction with original Rittal filter mats.
To fit Model No.	3138.xxx 3139.xxx 3140.xxx
Dimensions	Width: 265 mm Height: 100 mm Depth: 18 mm
Filter class	to DIN EN 779: M5 to DIN EN ISO 16890: ISO ePM10 50 %
IP protection category to IEC 60 529	IP 54 in fan-and-filter units/roof-mounted fans/outlet filters
Packs of	12 pc(s).

Features

0.276
0.4
56039390
4028177969070
EC002513
EC002513
27180706

Approvals

Approvals

UR + C-UR (recognized)