Rittal – The System.

Faster – better – everywhere.





AS 4051.232 Wire rail WT

State: 15/09/2025 (Source: rittal.com/nz-en)

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES




FRIEDHELM LOH GROUP

ENCLOSURES

AS 4051.232 - Wire rail WT

The pre-assembled wires are fed into the WT 28 wire rail with a cross-section of 0.75 mm² by the removal handling system.

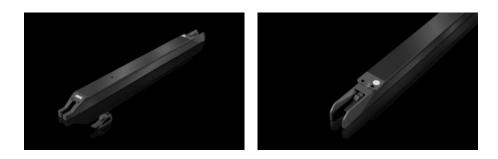

Features

Model No.	AS 4051.232
Benefits	Project-specific order picking for downstream processes
	Project-specific sorting of the wires
	Optimum removal handling
	Busbar system prepared for optimum workstation order-picking
	No wire sorting required
	Simplifies the wiring process with step-by-step instructions in Eplan
	Smart Wiring
	Ideal in conjunction with the Wire Cart for perfect workstation order
	picking
Supply includes	Wire rail WT 28
Note	This gap size indicates the maximum diameter of the wire
	insulation.
To fit Model No.	4051.205
	4051.210
	4051.024
	4051.036
Applications	For single wires with cross-section 0.75 mm ² (gap size 2.8 mm)
Packs of	1 pc(s).
Net weight	0.8
Gross weight	0.834
Customs tariff number	76169990

Features

EAN

4028177981096