
### Rittal – The System.

Faster - better - everywhere.



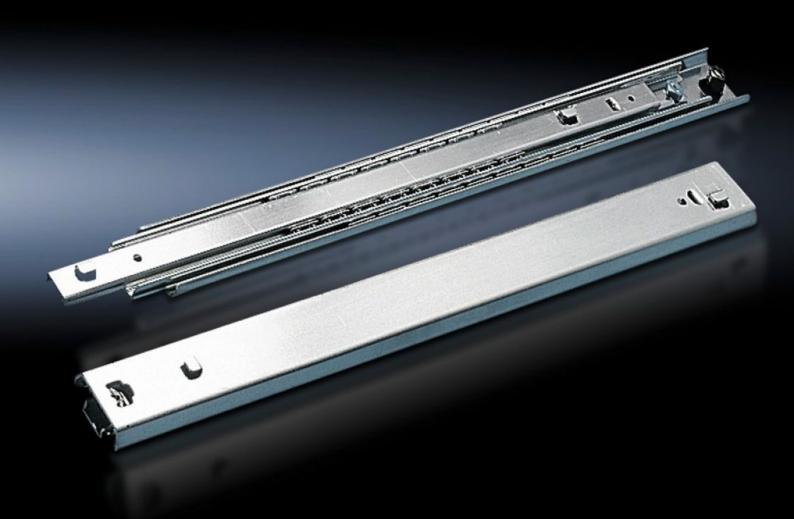

## DK 7066.700 Telescopic slides

State: 09/07/2025 (Source: rittal.com/ro-ro)



# DK 7066.700 - Telescopic slides for component shelves, for mounting on the VX enclosure frame and for upgrading existing VX and TS applications

For retrospectively converting fixed component shelves to full withdrawal by exchanging the fastening bolts or mounting rails (heavy-duty version) for the telescopic slides.

#### **Features**

| Model No.                          | DK 7066.700   |
|------------------------------------|---|
| Product description                | Fixed component shelves are easily converted to full withdrawal.  For this purpose, the existing fastening bolts or mounting rails  (heavy-duty version) are exchanged for the telescopic slides. |
| Material                           | Sheet steel   |
| Surface finish                     | Zinc-plated   |
| Suitable for component shelf depth | 700 mm  |
| Load capacity                      | 100 kg  |
| Note                               | For installation and locking on a 25 mm pitch pattern in the enclosure depth.   |
| Packs of                           | 2 pc(s).  |
| Net weight                         | 4.13  |
| Gross weight                       | 4.33  |
| PCF per pack (cradle-to-gate)      | 16.5 kg CO2 eq (Cat B)  |
| Note on PCF category               | Category B: PCF value (cradle-to-gate) based on the product weight, approximately calculated and self-declared  |
| Customs tariff number              | 73269098  |
| EAN                                | 4028177221468   |
| ETIM 9                             | EC002620  |
| ECLASS 8.0                         | 27189261  |

© Rittal 2025 2

### Tender text

Heavy duty telescopic slides D: 700 mm

Fully extendible. Fixed component shelves are easily retro-converted to full withdrawal. In this case the existing fastening bolts or mounting rails are replaced by the telescopic slides and fitted to the component shelf's divider kit.

For use with 700 mm deep component shelves For installation and locking on a 25 mm pitch pattern in the enclosure depth; load capacity per pair: 50/100 kg.

Material: Sheet steel, spray finished in RAL 7035

© Rittal 2025 3