


Rittal – The System.

Faster – better – everywhere.

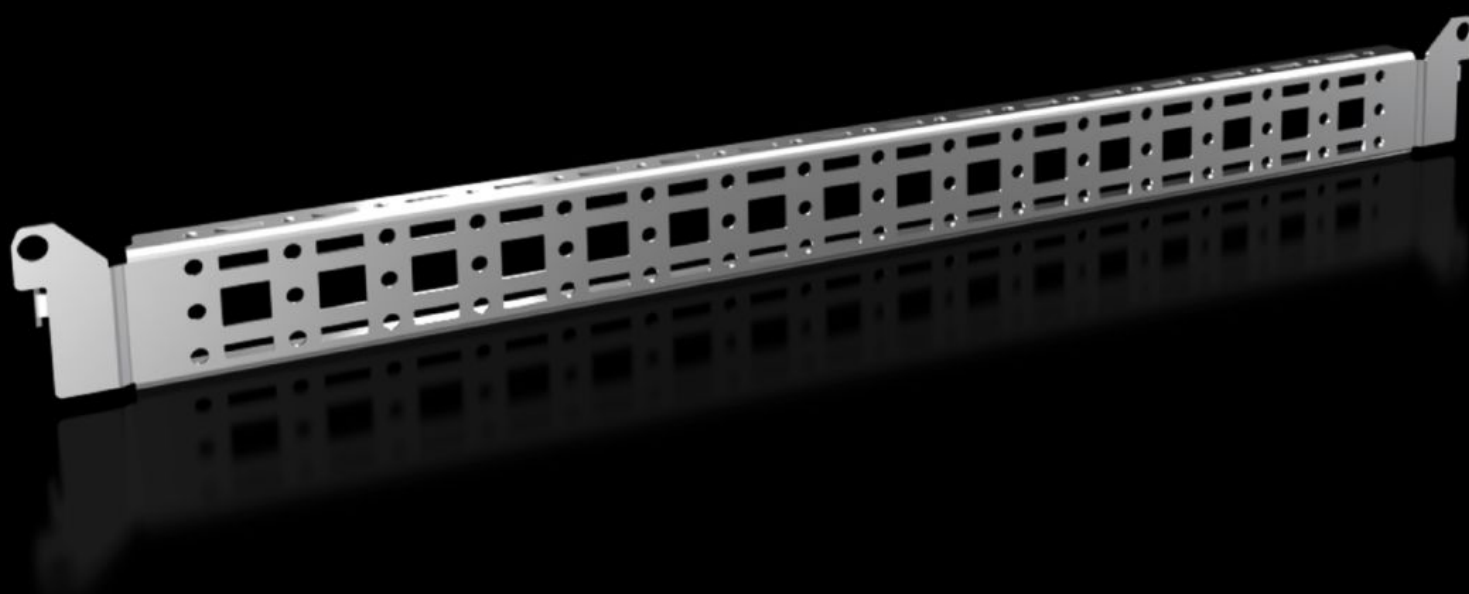

VX 8619.720

Punched section with mounting flange, 14 x 39 mm

State: 11/09/2025 (Source: rittal.com/ro-ro)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



VX 8619.720 - Punched section with mounting flange, 14 x 39 mm for VX, VX SE, PC, IW, AX

For securing cable ducts, cable conduit holders, equipment installed on the door, etc.



Features

| | |
|---|---|
| Model No. | VX 8619.720 |
| Product description | For attaching cable ducts, cable conduit holders, equipment installed on the door, etc. |
| Material | Sheet steel |
| Surface finish | Zinc-plated |
| Supply includes | Assembly parts |
| Distance between fixing points | 475 mm |
| To fit door width | 600 mm |
| VX installation options | In door width 600 mm |
| VX SE installation options | In door width 600 mm |
| AX installation options | In enclosure width 500 mm and in enclosure height 600 mm, in conjunction with rail for interior installation AX In enclosure width 1200 mm, in lockable door |
| AX stainless steel installation options | In enclosure height 600 mm |
| Installation options, AX plastic | In door width 600 mm |

Features

| | |
|------------------------------------|--|
| Installation options for 3-part AX | In the enclosure depth 673 mm or in the width of the wall section |
| PC installation options | In door width 600 mm |
| CX installation options | In door width 600 mm |
| Assembly instruction | For installation in AX sheet steel, only in conjunction with rail for interior installation AX |
| Note | For installing your own components on the punched section with mounting flange, metal screws or self-tapping M5 screws are required |
| To fit | Enclosure type: VX VX SE PC AX AX wall-mounted enclosure, 3-part CX one-piece console CX pedestal Suitable for width or height or depth: 600 mm |
| Packs of | 4 pc(s). |
| Net weight | 0.956 |
| Gross weight | 1.14 |
| Customs tariff number | 73269098 |
| EAN | 4028177924697 |
| E-Number Sweden | E3465254 |
| ETIM 9 | EC002620 |
| ECLASS 8.0 | 27189234 |