

Rittal – The System.

Faster – better – everywhere.



SV 3582.000 Busbars E-Cu

State: 23/02/2026 (Source: rittal.com/rs-sr)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE



SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



SV 3582.000 - Busbars E-Cu

Length: 2400 mm/bar.

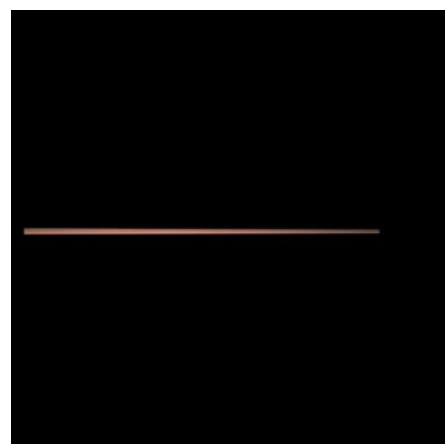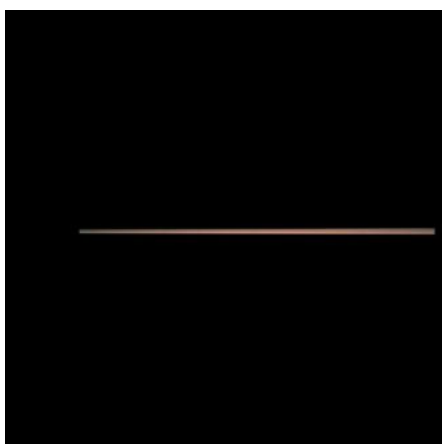

Features

| | |
|------------------------------|--|
| Model No. | SV 3582.000 |
| Material | E-Cu F30 |
| Length | 2.400 mm |
| Note | May be cut individually to required length |
| Standards | DIN EN 13 601 |
| Cross-section | 20 mm x 5 mm |
| Dimensions | Length: 2,400 mm |
| Packs of | 6 pc(s). |
| Net weight | 12,6 kg |
| Gross weight | 12,8 kg |
| Copper weight (kg per piece) | 2,15 |
| Customs tariff number | 74071000 |
| ETIM 9 | EC001522 |
| ETIM 8 | EC001522 |
| ECLASS 8.0 | 27370303 |
| Product description | SV Busbar E-Cu, WH: 20x5 mm, L: 2400 mm |

Approvals

| | |
|--------------|---|
| Approvals | UL + C-UL (listed) |
| Explanations | Declaration of conformity Declaration of conformity UK |

Tender text

Busbar made from E-Cu
Busbars E-Cu to DIN 13601
Technical specifications
Length: 2400 mm
Dimension: 20 x 5 mm
Cross section: 99.1 qmm
Weight: 0882 Kg/m
Electrical parameters
IEC: to 319 A
UL 508: 230 A
System:
Rittal RiLine60