
Rittal – The System.

Faster – better – everywhere.



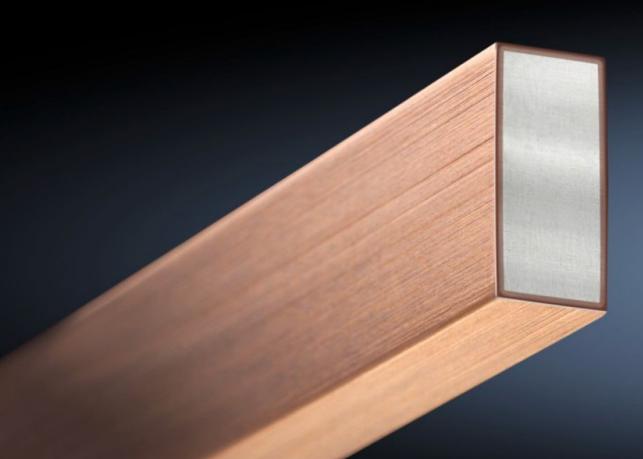

SV 3586.020 CUPONAL busbars

State: 03/09/2025 (Source: rittal.com/sg-en)



POWER DISTRIBUTION >> CLIMATE CONTROL


IT INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

ENCLOSURES

SV 3586.020 - CUPONAL busbars

Copper-coated aluminium busbar

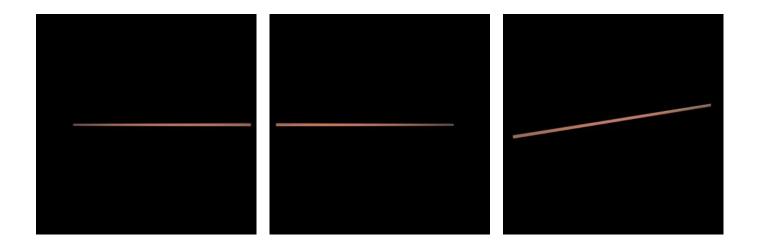

Features

Model No.	SV 3586.020
Product description	Copper-coated aluminium busbars, suitable for configuring busba systems with busbar supports 9340.000/9340.050.
Material	Aluminium
	Copper
Length	2,400 mm
Rated current max.	493 A
Note	The rated current is derived at 65 $^\circ\mathrm{C}$ bar temperature and 35 $^\circ\mathrm{C}$
	ambient temperature
	Correction factor diagram to DIN EN 43 671
	May be cut individually to required length
Standards	DIN EN 13 601
Cross-section	30 mm x 10 mm
Dimensions	Length: 2,400 mm
Packs of	3 pc(s).
Net weight	26.85
Copper weight (kg per piece)	2.61
Customs tariff number	74071000

Features

EAN	4028177686588
ETIM 9	EC001522
ETIM 8	EC001522
ECLASS 8.0	27370303

Approvals

Explanations

Declaration of conformity Declaration of conformity UK