


**Rittal – The System.**

Faster – better – everywhere.

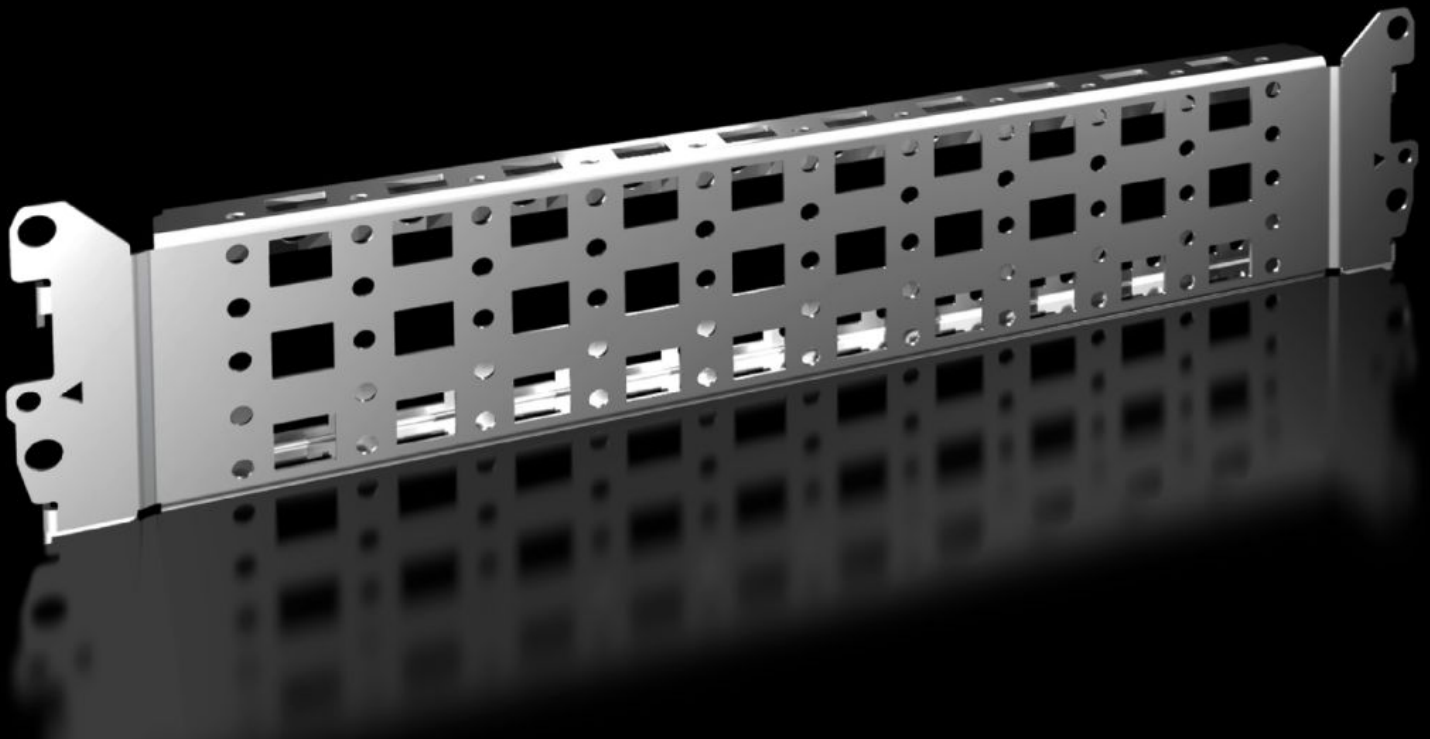

**VX 8617.110**

**Punched section with mounting  
flange, 23 x 64 mm**

State: 08/07/2026 (Source: [rittal.com/sg-en](http://rittal.com/sg-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# VX 8617.110 - Punched section with mounting flange, 23 x 64 mm for VX, VX IT, VX SE, AX plastic

For variable, individual interior installation of the enclosure frame on the inner mounting level, and for installation in compact enclosures.



## Features

|                            |                                                                                                                                                                                                       |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model No.                  | VX 8617.110                                                                                                                                                                                           |
| Product description        | For variable, individual interior installation of the enclosure frame on the inner mounting level, and for installation in compact enclosures.                                                        |
| Benefits                   | Simply locate into the system punchings and screw-fasten<br>System punchings on all four sides<br>With slots at the top and bottom for cage nuts, for attaching your own components via metric screws |
| Material                   | Sheet steel                                                                                                                                                                                           |
| Surface finish             | Zinc-plated                                                                                                                                                                                           |
| Supply includes            | Assembly parts                                                                                                                                                                                        |
| VX installation options    | In enclosure width/depth 400 mm on the inner mounting level                                                                                                                                           |
| VX SE installation options | In enclosure depth 400 mm, on the inner mounting level, in conjunction with adaptor rail for VX compatibility                                                                                         |
| AX installation options    | In enclosure width/height 400 mm, in conjunction with rail for interior installation AX and base configuration rail for AX                                                                            |

# Features

|                                         |                                                                                                                        |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| AX stainless steel installation options | In enclosure width 400 mm, in conjunction with the base configuration rail                                             |
| Installation options, AX plastic        | In enclosure width 400 mm, in conjunction with universal bracket                                                       |
| CX installation options                 | In the pedestal, in the enclosure depth, 400 mm<br>In one-piece console pedestal, in enclosure depth 400 mm            |
| VX base/plinth installation options     | In base/plinth width/depth 400 mm on the base/plinth trim panels, in conjunction with base/plinth installation bracket |
| To fit                                  | Enclosure type: VX<br>VX IT<br>VX SE<br>AX<br>AX plastic<br>Suitable for width or height or depth: 400 mm              |
| To fit                                  | Base/plinth system VX                                                                                                  |
| Packs of                                | 4 pc(s).                                                                                                               |
| Net weight                              | 1.4 kg                                                                                                                 |
| Gross weight                            | 1.53 kg                                                                                                                |
| PCF per pack (cradle-to-gate)           | 8.39                                                                                                                   |
| Customs tariff number                   | 73269098                                                                                                               |
| ETIM 9                                  | EC002620                                                                                                               |
| ECLASS 8.0                              | 27189234                                                                                                               |
| Product description                     | VX Punched section, with mounting flange 23 x 64 mm, for inner mounting level                                          |

# Approvals

|              |                 |
|--------------|-----------------|
| Explanations | PCF-declaration |
|--------------|-----------------|