Rittal – The System.

Faster – better – everywhere.





IT INFRASTRUCTURE SOFTWARE & SERVICES

SK 3108.115 Enclosure internal fan

CLIMATE CONTROL

State: 11.9.2025 (Source: rittal.com/si-sl)

POWER DISTRIBUTION




FRIEDHELM LOH GROUP

ENCLOSURES

SK 3108.115 - Enclosure internal fan

To prevent hot-spots inside the enclosure and support the air routing of active enclosure climate control components.

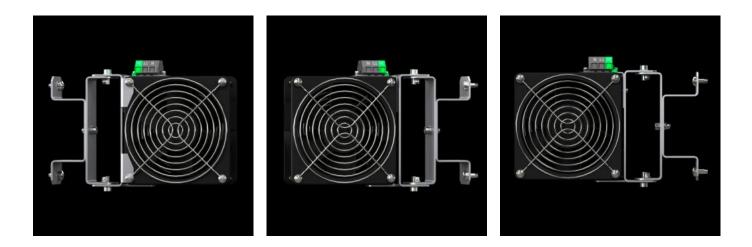

Features

| Model No. | SK 3108.115 |
|-------------------------|--|
| Product description | To prevent hot-spots and support the air routing of active enclosure climate control components. Adjustable in two axes. Attached to the frame section. Several fans may be cascaded using the quick- release clamping strip. |
| Supply includes | Complete unit with axial fan ready for connection Snap-on pivot device Assembly parts |
| Rated operating voltage | 115 V, 1~, 50 Hz/60 Hz |
| Power consumption Pel | At 50 Hz: 19 W At 60 Hz: 18 W |
| Rated current max. | At 50 Hz: 0.24 A At 60 Hz: 0.23 A |
| Packs of | 1 pc(s). |
| Net weight | 0.96 |
| Gross weight | 1.136 |
| Customs tariff number | 84145915 |
| EAN | 4028177220492 |
| | |

Features

| ETIM 9 | EC000320 |
|------------|----------|
| ETIM 8 | EC000320 |
| ECLASS 8.0 | 27180716 |

Approvals

Explanations

Declaration of conformity