
## Rittal - The System.

Faster - better - everywhere.



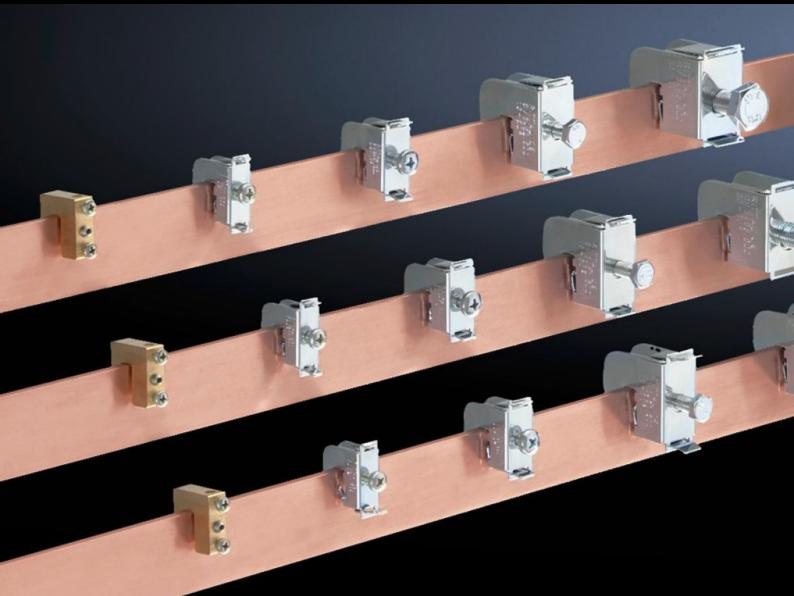

# SV 3458.500 Conductor connection clamp

State: 27.10.2025 (Source: rittal.com/si-sl)



## SV 3458.500 - Conductor connection clamp

For connecting round conductors and laminated copper bars.

#### **Features**

ninated copper bars.
minated copper bars.
e wire conductors
ased on the product weight, ed

© Rittal 2025

### **Approvals**

Approvals	UR + C-UR (recognized)
Explanations	Declaration of conformity
	Declaration of conformity UK

#### Tender text

SV conductor connection clamps

for E-CU busbars and Rittal PLS.

For bar thickness: 10 mm

Connection of round conductors 35 - 70 mm2

Wire end ferrules should be used with

fine wire conductors.

Clamping area: for laminated copper bars 15 mm

Tightening torque

Conductor connection clamp: 10 - 12 Nm Material: sheet steel, zinc plated, passivated

© Rittal 2025