


# Rittal – The System.

Faster – better – everywhere.



## DK 7000.678

### Punched section with mounting flange, 17 x 73 mm, depth-variable for mounting frame

State: 20.05.2025 (Source: [rittal.com/ua-en](http://rittal.com/ua-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# DK 7000.678 - Punched section with mounting flange, 17 x 73 mm, depth-variable for mounting frame for TS, TE, TX CableNet

For flexible interior installation, and/or to accommodate additional built-in components. The punched sections with mounting flanges may be located in the enclosure depth between two mounting frames.

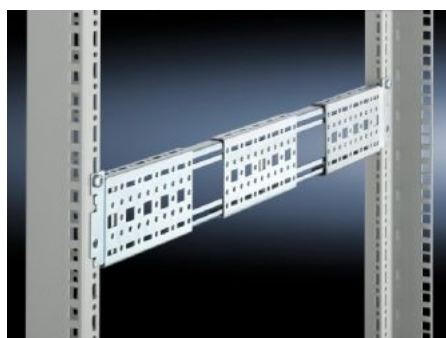

## Features

|                       |  |
|-----------------------|--|
| Model No.             | DK 7000.678  |
| Product description   | Punched sections with mounting flanges may be suspended between two mounting frames with a 482.6 mm (19") distance between levels of 650-820 mm. An additional screw fastening secures the unit. |
| Material              | Sheet steel  |
| Surface finish        | Zinc-plated  |
| Supply includes       | Assembly screws  |
| To fit                | for TS, TE, TX CableNet  |
| Length                | 530: 700 mm  |
| Packs of              | 2 pc(s).   |
| Net weight            | 1.64   |
| Gross weight          | 1.84   |
| Customs tariff number | 73269098   |
| EAN                   | 4028177435551  |

# Features

|            |          |
|------------|----------|
| ETIM 9     | EC002625 |
| ECLASS 8.0 | 27189234 |

## Tender text

Flexible punched section, 530 - 700 mm

2 x variable punched section, each fitted with a  
movable centre piece, includes assembly parts.  
Distance between 19" levels (mm): 650 - 820 mm

Material: Sheet steel, zinc-plated, passivated