


# Rittal – The System.

Faster – better – everywhere.

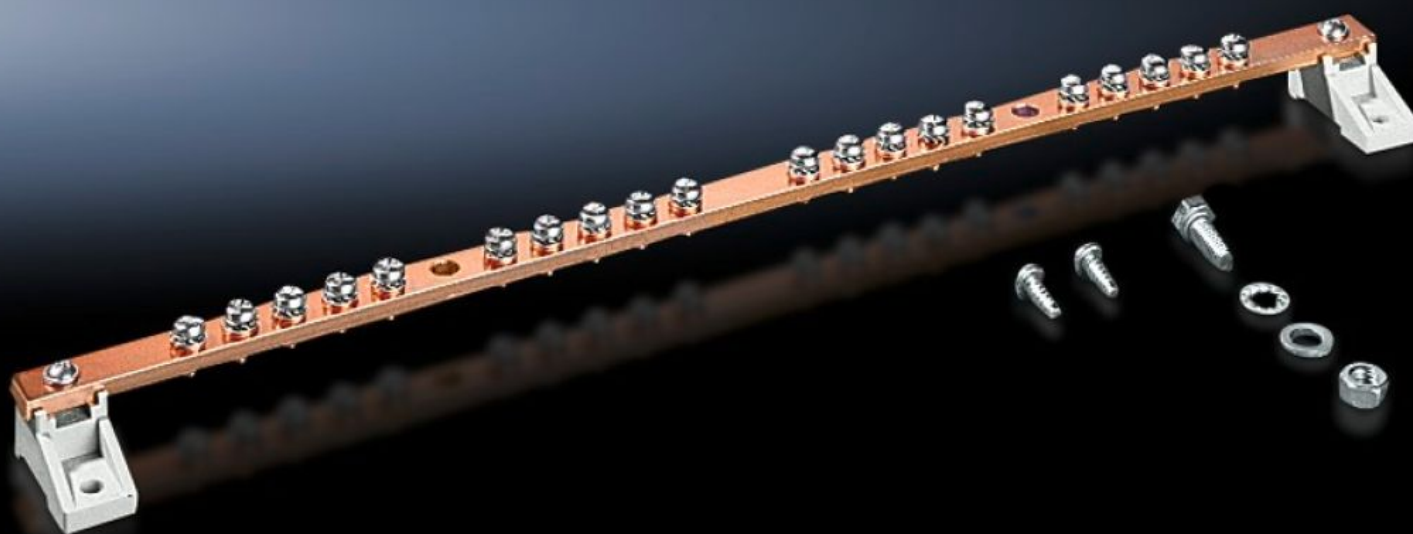

## DK 7113.000

### Earth rail, horizontal

State: 15.08.2025 (Source: [rittal.com/ua-en](https://rittal.com/ua-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# DK 7113.000 - Earth rail, horizontal

Potential equalisation rail, current carrying capacity approx. 200 A.

## Features

|                              |   |
|------------------------------|---|
| Model No.                    | DK 7113.000   |
| Product description          | Current carrying capacity approx. 200 A.  |
| Supply includes              | Earth rail made from E-Cu 57 to DIN EN 12 163, DIN EN 13 601, 15 x 5 mm<br>20 connection points with M5 screws<br>2 earth connections 25 mm <sup>2</sup><br>2 isolators<br>Assembly parts |
| Dimensions                   | Width: 15 mm<br>Height: 5 mm<br>Length: 450 mm  |
| To fit                       | Enclosure type: AX<br>VX<br>VX IT<br>TS<br>TS IT<br>AX wall-mounted enclosure, 3-part<br>Width: > 600 mm<br>Depth: > 600 mm<br>To fit width/depth: 800 mm                                 |
| Packs of                     | 1 pc(s).  |
| Net weight                   | 0.402   |
| Gross weight                 | 0.436   |
| Copper weight (kg per piece) | 0.28  |
| Customs tariff number        | 74198090  |
| EAN                          | 4028177124943   |
| E-Number Sweden              | E7239683  |
| ETIM 9                       | EC000329  |

# Features

---

ECLASS 8.0

27400605

# Approvals

---

Explanations

Manufacturer's declaration

# Tender text

Earth rail / potential equalisation rail

For installing in network and server enclosures or wall-mounted distribution enclosures, W/D: >600 mm. The E-Cu 57 earth rail has two isolators, 20 M5 earth connections and two 25 mm earth connections. The rail's current carrying capacity is 200A.

Earthing rail length: 450 mm