
Rittal – The System.

Faster – better – everywhere.



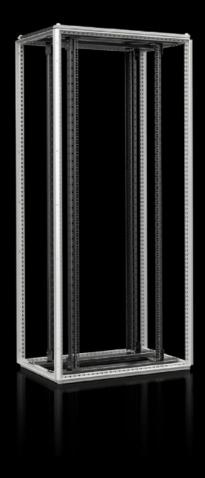

VX 1182.096 VX IT Open

State: 25/12/2025 (Source: rittal.com/uae-en)



VX 1182.096 - VX IT Open

VX IT standard version, without front and rear door. Usable either as an open 482.6 mm (19") frame in a secure environment or as the basis for fast configurations in the Rittal RiPanel configuration system using existing accessories (such as doors and side panels) from the Rittal modular range.







Features

VX 1182.096	
VX enclosure frame with roof plate without front and rear door	
Vented	
without side panels	
Enclosure frame: Dipcoat-primed	
Interior installation: Spray-finished	
RAL 7035	
Enclosure frame and roof: RAL 7035	
Interior installation: RAL 9005	
	VX enclosure frame with roof plate without front and rear door Vented without side panels Enclosure frame: Dipcoat-primed Interior installation: Spray-finished RAL 7035 Enclosure frame and roof: RAL 7035

© Rittal 2025

Features

Enclosure frame Mounting angles, 482.6 mm (19") Spacers, height 50 mm, to raise a cover plate above the fan cut-out in the roof plate, for passive cooling (supplied loose). Not required for variants without a cut-out. 12 x 482.6 mm (19") fastener, 1 U, conductive (supplied loose) 25 multi-tooth screws, conductive (supplied loose) IPPC pallet Roof plate, multi-piece, with side cable entry in the depth, double-sided, prepared for fan mounting plate
Width: 800 mm Height: 2,000 mm Depth: 800 mm
42 U
150 mm / 130 mm
520 mm
on the cross-member, screw-fastened at the top and bottom
Standard
multi-piece, with side cable entry in the depth, double-sided, prepared for fan mounting plate
482.6 mm (19") mounting angles, standard in the VX IT
Open
front and rear
8,000 N
8,000 N
Sheet steel
Sheet steel 1 pc(s).

© Rittal 2025 3

Features

EAN	4028177973305
ETIM 9	EC002499
ETIM 8	EC002499
ECLASS 8.0	27180207

Approvals

Explanations	Manufacturer's declaration
	Declaration of conformity

© Rittal 2025