


Rittal – The System.

Faster – better – everywhere.

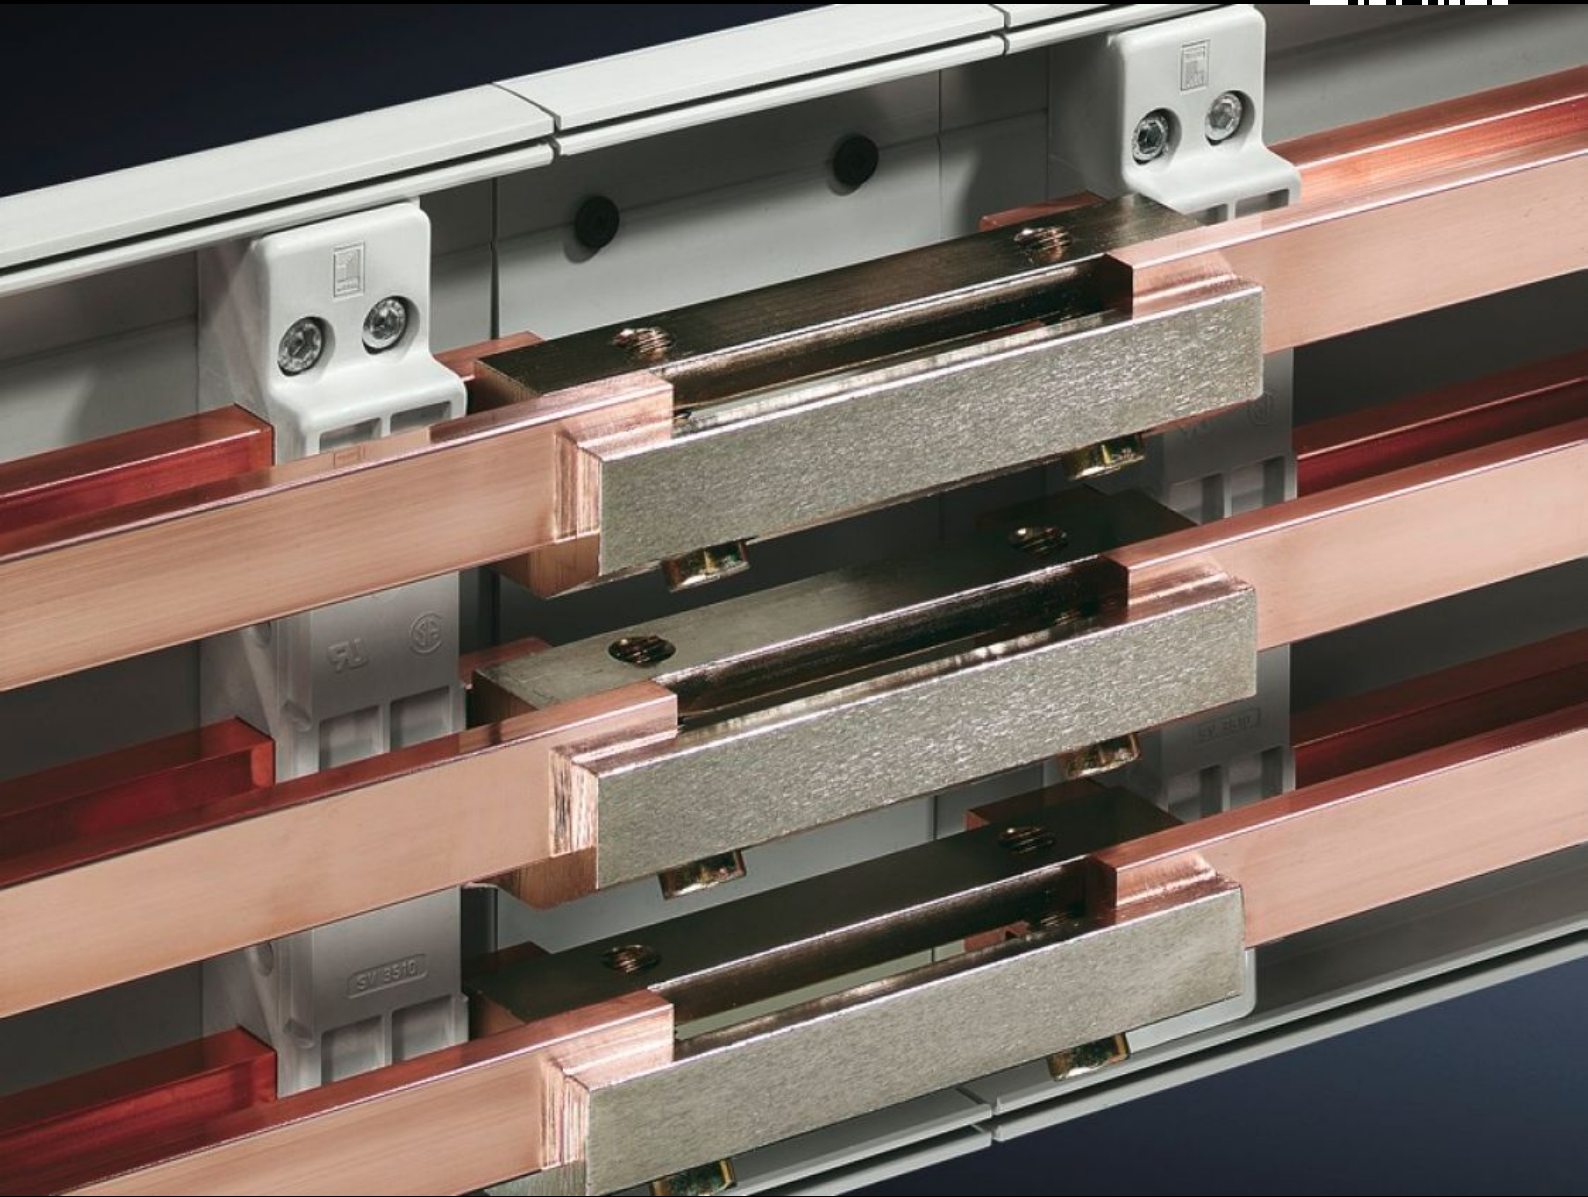

SV 3515.000

PLS busbar connectors

State: 30/06/2026 (Source: rittal.com/uae-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



SV 3515.000 - PLS busbar connectors

For connecting PLS special busbars, no drilling required.



Features

| | |
|------------------------------|---|
| Model No. | SV 3515.000 |
| Product description | For connecting the PLS special busbars, no drilling required. |
| Material | E-Cu |
| Surface finish | Nickel-plated |
| Rated current (max.) | 1,368 A |
| To fit busbars | PLS 1600 |
| To fit Model No. | 9342.000 9342.004 9342.050 |
| Connection type | Baying connection from enclosure to enclosure |
| Dimensions | Length: 150 mm |
| Packs of | 3 pc(s). |
| Net weight | 3.81 kg |
| Gross weight | 4.015 kg |
| Copper weight (kg per piece) | 1.27 |
| Customs tariff number | 85369010 |
| ETIM 9 | EC000713 |
| ETIM 8 | EC000713 |

Features

ECLASS 8.0

27400606

Product description

SV Busbar connector, PLS 1600, bayed connection

Approvals

Approvals

ABS
DNV
Lloyds Register
UL + C-UL (listed)

Explanations

Declaration of conformity
Declaration of conformity UK

Tender text

PLS 1600 busbar connector

System

Rittal RiLine60

Description

PLS 1600 busbar connector for connecting the
PLS 1600 special busbar

Design

Baying connection from enclosure to enclosure

Material properties

E-Cu, nickel-plated

Screw M10

Tightening torque

20 Nm

Note

The use of cross members 9340240/230 is compulsory
for UL 508A applications.