Rittal – The System.

Faster – better – everywhere.



# CP 6372.563
# Comfort Panel


State: 19/11/2026 (Source: www.rittal.com/uk-en)

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

# CP 6372.563 - Comfort Panel

Aluminium enclosure, high thermal conductivity for optimum passive heat dissipation. Low weight coupled with high stability. Protection category IP 65 to IEC 60 529.

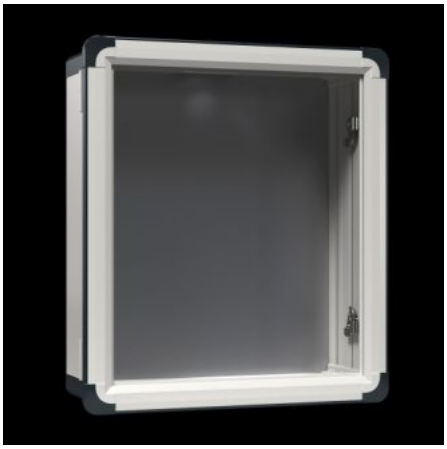



## Features

| | |
|---|---|
| Model No. | CP 6372.563 |
| Design | Support arm connection Ø 130 mm |
| Benefits | Aluminium enclosure, high thermal conductivity for optimum passive heat dissipation.<br>Low weight coupled with high stability<br>Compatible with all Rittal stand and support arm systems |
| Material | Enclosure: Extruded aluminium section<br>Corner pieces: Die-cast zinc<br>Corner protectors: Plastic |
| General colour | Natural anodised |
| Colour | Enclosure: Natural anodised<br>Corner pieces: RAL 7035<br>Corner protectors: similar to RAL 7024 |
| Supply includes | Enclosure with cut-out for support arm connection<br>3 mm double-bit lock insert may be exchanged for 41 mm lock inserts, plastic handles and T handles, type C<br>Seals and assembly parts for front panels<br>Screw-fastened rear panel, enclosure hinged at the front with side double-bit lock insert |

© Rittal 2026

# Features

| | |
|---|---|
| Dimensions | Width: 628.5 mm<br>Height: 708.5 mm<br>Depth: 209 mm |
| Installation depth | 191 mm |
| IP protection category to IEC 60 529 | IP 65 |
| Protection category NEMA | NEMA 12 |
| To fit front panel width | 520 mm |
| To fit front panel height | 600 mm |
| Design | Servicing access from the rear |
| Note | The support arm connection may be swapped over by rotating the enclosure |
| Basic material | Aluminium |
| Lock | Lock version: Crescent-shaped cam<br>Number of locks: 2<br>Lock insert: 3 mm double-bit |
| Packs of | 1 pc(s). |
| Net weight | 18.7 kg |
| Gross weight | 20.34 kg |
| Customs tariff number | 94032080 |
| ETIM 9 | EC002504 |
| ECLASS 8.0 | 27180505 |
| Product description | CP Compact Panel, for front panel BH 520x600 mm, installation depth 191 mm, Extruded aluminum section, Support arm connection Ø 130 mm, Screw-fastened rear panel |

# Approvals

| | |
|---|---|
| Approvals | UL + C-UL (listed) |

# Approvals

Explanations

Declaration of conformity
Declaration of conformity UK