


# Rittal – The System.

Faster – better – everywhere.

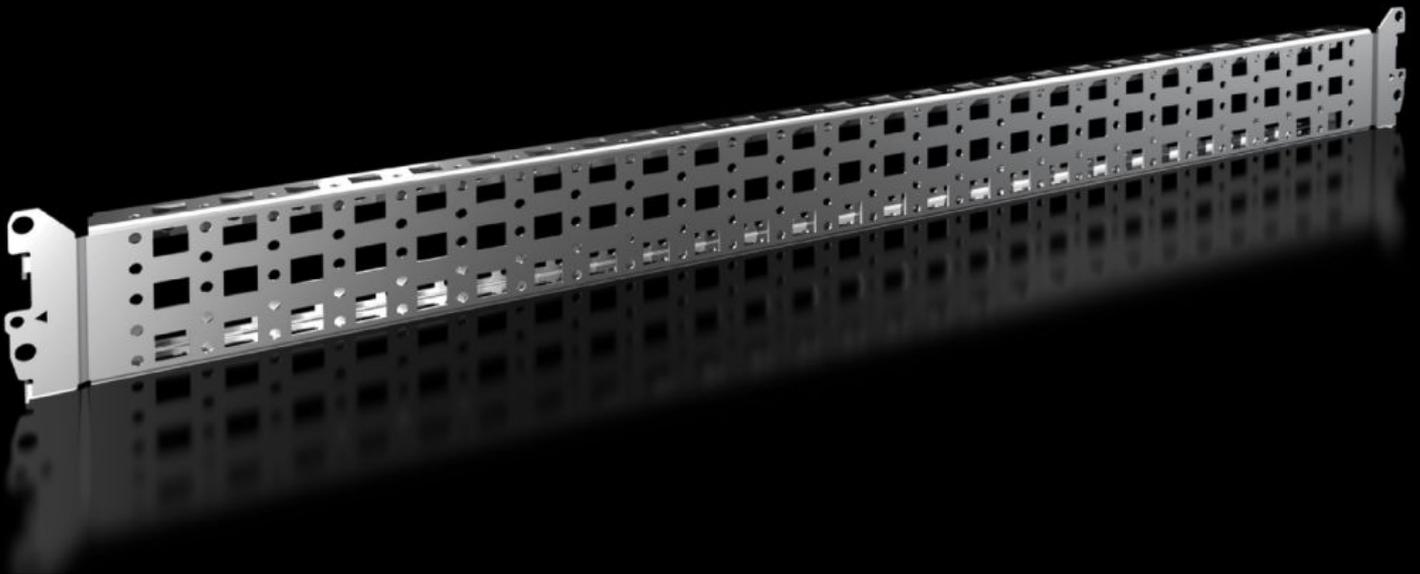

## VX 8617.140

# Punched section with mounting flange, 23 x 64 mm

State: 7/04/2026 (Source: [rittal.com/uk-en](http://rittal.com/uk-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# VX 8617.140 - Punched section with mounting flange, 23 x 64 mm for VX, VX IT, VX SE, AX plastic

For variable, individual interior installation of the enclosure frame on the inner mounting level, and for installation in compact enclosures.

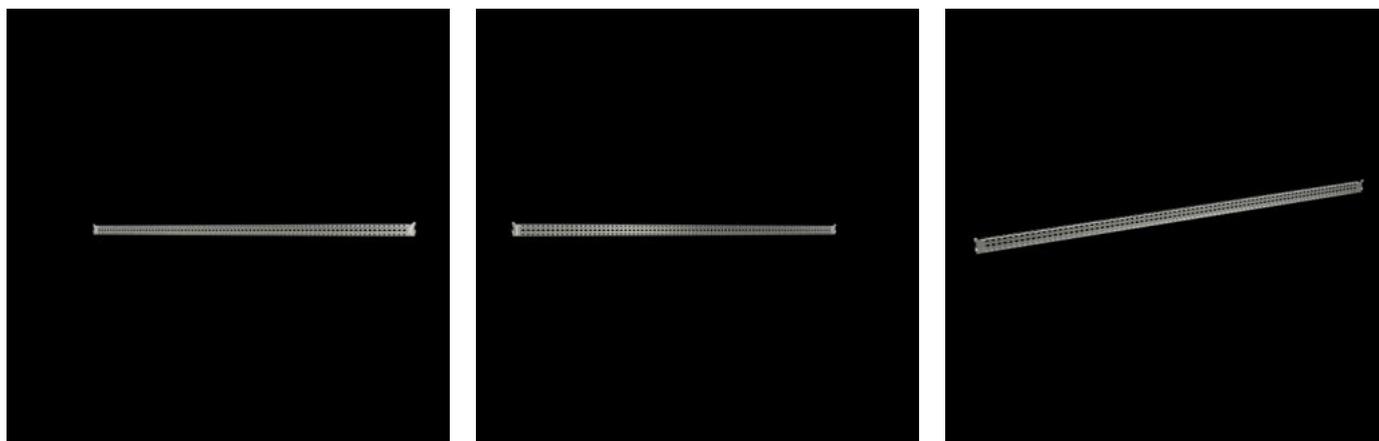

## Features

|                            |   |
|----------------------------|---|
| Model No.                  | VX 8617.140   |
| Product description        | For variable, individual interior installation of the enclosure frame on the inner mounting level, and for installation in compact enclosures.  |
| Benefits                   | Simply locate into the system punchings and screw-fasten<br>System punchings on all four sides<br>With slots at the top and bottom for cage nuts, for attaching your own components via metric screws |
| Material                   | Sheet steel   |
| Surface finish             | Zinc-plated   |
| Supply includes            | Assembly parts  |
| VX installation options    | In enclosure width/depth 800 mm, on the inner mounting level  |
| VX SE installation options | In enclosure width 800 mm, on the inner mounting level, in conjunction with adaptor rail for VX compatibility   |
| AX installation options    | In enclosure width/height 800 mm, in conjunction with rail for interior installation AX and base configuration rail for AX  |

# Features

|   |  |
|---|--|
| AX stainless steel installation options | In enclosure width 800 mm, in conjunction with the base configuration rail   |
| Installation options, AX plastic        | In enclosure width 800 mm, in conjunction with universal bracket   |
| PC installation options                 | In enclosure width 800 mm, in conjunction with adaptor rail for VX compatibility                                       |
| VX base/plinth installation options     | In base/plinth width/depth 800 mm on the base/plinth trim panels, in conjunction with base/plinth installation bracket |
| To fit                                  | Enclosure type: VX<br>VX IT<br>VX SE<br>PC<br>AX<br>AX plastic<br>Suitable for width or height or depth: 800 mm        |
| To fit                                  | Base/plinth system VX  |
| Packs of                                | 4 pc(s).   |
| Net weight                              | 3.16 kg  |
| Gross weight                            | 3.376 kg   |
| Customs tariff number                   | 73269098   |
| ETIM 9                                  | EC002620   |
| ECLASS 8.0                              | 27189234   |
| Product description                     | VX Punched section, with mounting flange 23 x 64 mm, for inner mounting level, for W/H/D: 800 mm                       |

# Approvals

|              |                 |
|--------------|-----------------|
| Explanations | PCF-declaration |
|--------------|-----------------|