
Rittal – The System.

Faster – better – everywhere.

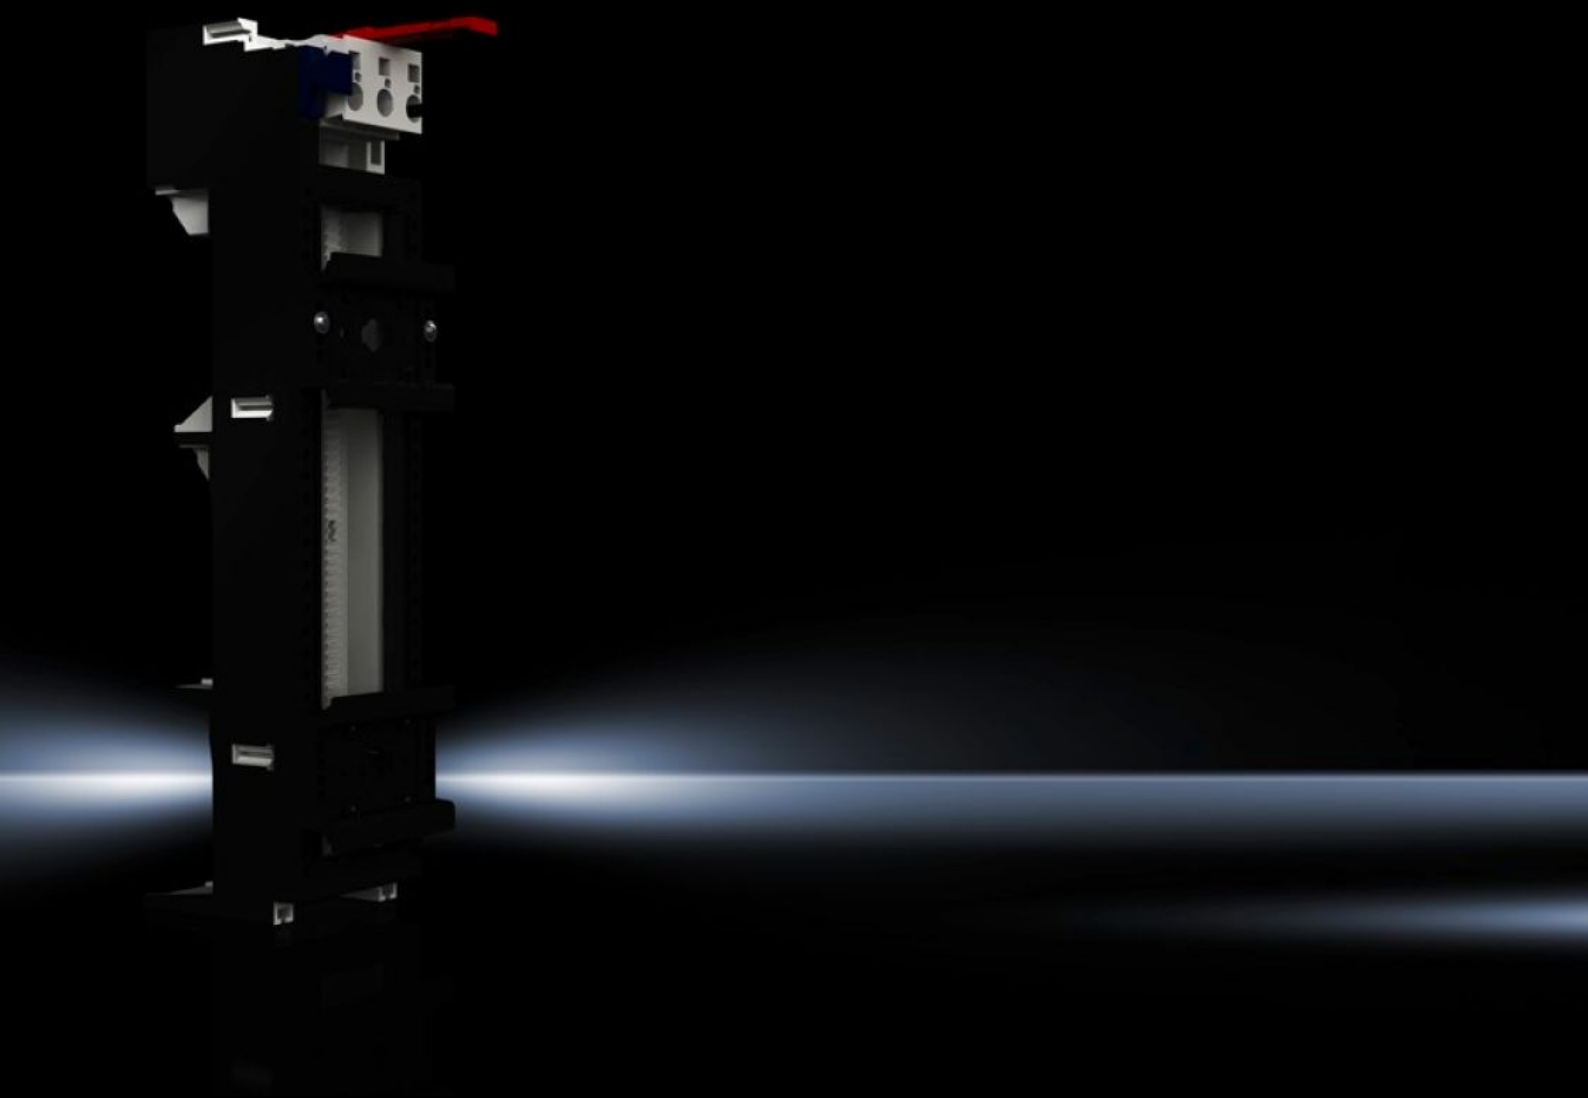

# SV 9340.910
# OM adaptors

State: 24/11/2026 (Source: www.rittal.com/uk-en)

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

# SV 9340.910 - OM adaptors with plug-in cable outlet



## Features

| | |
|---|---|
| Model No. | SV 9340.910 |
| Design | with plug-in cable outlet |
| Material | Polyamide<br>Fire protection corresponding to UL 94-V0 |
| Colour | Chassis: RAL 7035 |
| Supply includes | Connector with connection facility for 3 main contacts (1.5 – 4 mm²) |
| Rated current max. | 25 A |
| Rated operating voltage | 690 V, 3~ |
| For bar systems with centre-to-centre spacing | 60 mm |
| Support rail type | Support frame, 1 x TS 45D, 1 x TS 45D-V |
| Number of poles | 3-pole |
| Connector outlet | Connector with connection facility for 3 main contacts (1.5 – 4 mm²) |
| Dimensions | Width: 45 mm<br>Height: 208 mm |
| Connection of round conductors | 1.5 - 4 mm² |
| Support rails Qty/height | 2 / 10 mm |
| To fit busbars | Height: 5, 10 mm |

© Rittal 2026

# Features

| | |
|---|---|
| Support frame (W x H) | 45 mm x 170 mm |
| Packs of | 1 pc(s). |
| Net weight | 0.201 kg |
| Gross weight | 0.289 kg |
| Copper weight (kg per piece) | 0.025 |
| Customs tariff number | 85369095 |
| ETIM 9 | EC001531 |
| ETIM 8 | EC001531 |
| ECLASS 8.0 | 27370304 |
| Product description | SV OM adaptor, 25 A, 690 V, 3-pole, with plug-in cable outlet, WH: 45x208 mm, support frame, support rail TS 45D, TS 45D-V |

# Approvals

| | |
|---|---|
| Approvals | ABS<br>DNV<br>Lloyds Register |
| Explanations | Declaration of conformity<br>Declaration of conformity UK |

# Tender text

OM adaptor 25 A
OM adaptor 25 A premium adaptor  3-pole
for busbar thickness 5/10 mm and PLS 800/1600
Technical specifications
Construction width: 45 mm
Length: 208 mm
Support frame: 45 x 170 mm
Support frame support: -
PinBlock: -
Connector outlet: with connection facility
for 3 main contacts
Support rail: -
System:
Rittal RiLine60

© Rittal 2026