
Rittal – The System.

Faster – better – everywhere.

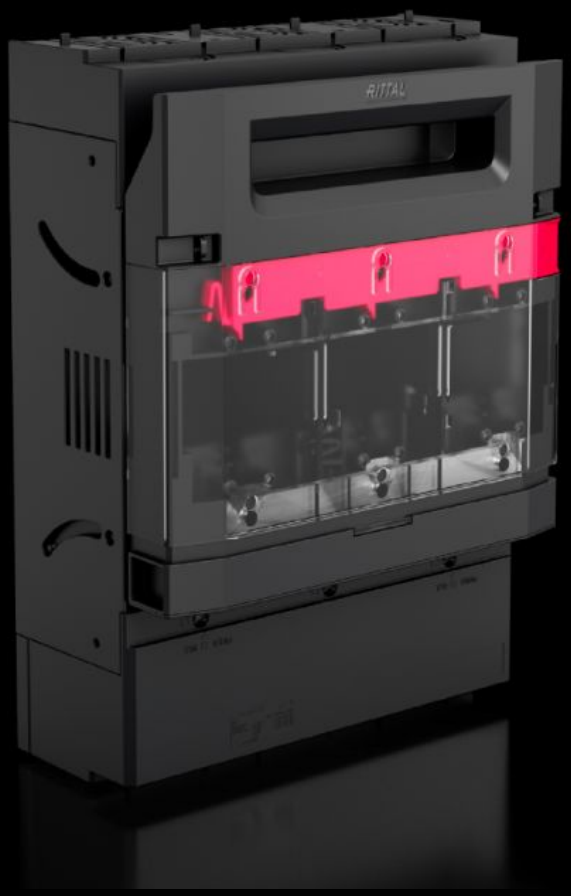

# RX 9363.315

# RiLineX NH fuse-switch disconnector

State: 23/11/2026 (Source: www.rittal.com/uk-en)

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

# RX 9363.315 - RiLineX NH fuse-switch disconnector

RiLineX NH fuse-switch disconnector in size 3 for mounting plates. The cover can be locked and prepared for a lead seal. It also has visual fuse monitoring. Integrated measuring points on the cover ensure safe voltage testing. NH fuse-switch disconnectors have a park position to make maintenance easier. Size M10 screw terminal connection. Includes electronic fuse monitoring.







## Features

| | |
|---|---|
| Model No. | RX 9363.315 |
| Design | For mounting plate assembly<br>with electronic fuse monitoring |
| Benefits | Cover: can be locked and prepared for a lead seal<br>Voltage test through separate opening<br>Tool-free changeover of the cable outlet<br>Park position for simpler maintenance work<br>All variants also available with electronic fuse monitoring |
| Material | Polyamide (PA 6)<br>Fire protection corresponding to UL 94<br>Contact tracks: Electrolytic copper, silver-plated |
| Colour | RAL 9005<br>RAL 35745 |
| Supply includes | Connectors for electronic fuse monitoring |
| for mounting plate assembly | Yes |
| Cable outlet | Top/bottom |

© Rittal 2026

# Features

| | |
|---|---|
| Type of electrical connection | Screw M10 |
| Fuse inserts | NH 3 |
| Rated insulation voltage Ui | 1,000 kV |
| Rated operating voltage | 1000 V AC |
| For NH size | 3 |
| Test specification | IEC/DIN EN 60 947-3<br>DIN EN 60 269-2 (fuse inserts) |
| Dimensions | Width: 250 mm<br>Height: 348.6 mm<br>Depth: 128.7 mm |
| Operating temperature range | -5 °C...35 °C |
| Storage temperature range | -25 °C...70 °C |
| Number of poles | 3-pole |
| Utilisation category | AC-23B (400 V/630 A)<br>AC-22B (500 V/630 A)<br>AC-23B (500 V/315 A)<br>AC-22B (690 V/630 A)<br>AC-23B (690 V/315 A)<br>AC-21B (800 V/315 A)<br>AC-20B (1000 V/630 A)<br>DC-22B (250 V/630 A)<br>DC-22B (440 V/630 A)<br>DC-20B (800 V/630 A)<br>DC-20B (1000 V/630 A) |
| Contamination level | 3 |
| with electronic fuse monitoring | Yes |
| IP protection category to IEC 60 529 | IP 20 |
| Fire load | 50.46 MJ/m² |
| Heat loss max. | 84 W |
| Packs of | 1 pc(s). |
| Net weight | 4.21 kg |

© Rittal 2026

# Features

| | |
|---|---|
| Gross weight | 4.216 kg |
| Copper weight (kg per piece) | 1.68 |
| PCF per pack (cradle-to-gate) | 28.57 |
| Customs tariff number | 85369095 |
| ETIM 9 | EC001040 |
| Product description | RiLineX NH fuse-switch disconnector in size 3 for mounting plates. The cover can be locked and prepared for a lead seal. It also has visual fuse monitoring. Integrated measuring points on the cover ensure safe voltage testing. NH fuse-switch disconnectors have a park position to make maintenance easier. Size M10 screw terminal connection. Includes electronic fuse monitoring. |

# Approvals

| | |
|---|---|
| Approvals | CQC-CCC |
| Explanations | Declaration of conformity<br>PCF-declaration |

# Tender text

RiLineX NH fuse-switch disconnector (size 3 mit ESÜ)

NH fuse-switch disconnector for
mounting on mounting plate.
Other properties include sealability,
Voltage test via separate openings,
Parking position for the cover and lockability with
padlocks in the open position (service case).
Rated voltage 690 V AC.
Product information
Number of poles: 3
Busbar dimensions: 15/20/30 mm

Busbar dimensions: 5/10 mm
Rated current: 630 A
Type of electrical connection: Screw M10
Cable outlet: top/bottom
Dimensions: 250 mm x 348 mm x 134 mm (BxHxT)
Feature: Electronic fuse monitoring
Manufacturer: Rittal GmbH & Co. KG
Type: 9363315