Rittal – The System.

Faster – better – everywhere.



# AX 2262.130

# AX wall-mounted housing, 3-part


State: 11/6/2026 (Source: www.rittal.com/us-en)


ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

# AX 2262.130 - AX wall-mounted housing, 3-part

The delivery concept of the three-part AX wall-mounted enclosure reduces complexity and increases flexibility. Thanks to the AX/VX modular system, the enclosures are suitable for various applications. The three-part structure ensures easy access.

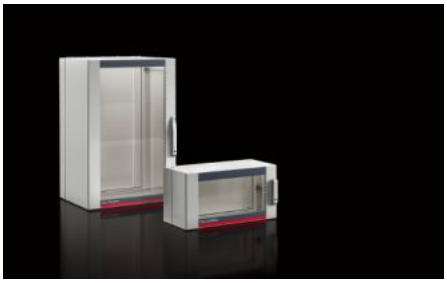

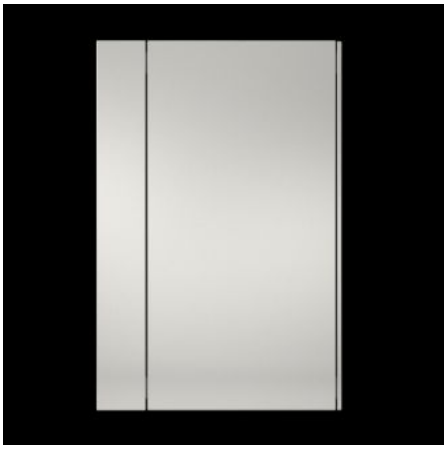



## Features

| | |
|---|---|
| Model No. | AX 2262.130 |
| Version | Wall-mounted housing IT |
| Material | Wall and hinged part: Carbon steel, 1.5 mm<br>Viewing window: Single-pane safety glass, 3 mm |
| Surface finish | Powder-coated |
| Color | Wall and hinged part: RAL 7035<br>Viewing door: RAL 7035/7015 (slate gray) |
| Supply includes | Wall section: Flange (gland) plate, solid, top and bottom<br>Hinged part with 25 mm pitch pattern in the front and rear frame, two 19" profile angles at the front, fixed in place<br>Designer viewing door<br>Center part lock: 3 mm double bit<br>Lock design – glazed door: Security lock 3524 E<br>Comfort handle for lock inserts and 2-point locking |
| Height units | 21 U |

© Rittal 2026

# Features

| | |
|---|---|
| Dimensions | Width: 600 mm<br>Height: 1,012 mm<br>Depth: 373 mm<br>Width: 23.6 ″<br>Height: 39.8 ″<br>Depth: 14.7 ″ |
| Installation depth | 320 mm<br>12.6 ″ |
| Clearances | Clearance width: 502 mm<br>Clearance height: 951 mm<br>Clearance width: 19.8 ″<br>Clearance height: 37.4 ″ |
| Depth hinged part | 216 mm<br>8.5 ″ |
| Depth of wall section | 135 mm<br>5.31 ″ |
| No. of locks | 1 |
| Load capacity of hinged part (static) | 750 N |
| Load capacity wall section (static) | 250 N |
| Base material | Carbon steel |
| Lock | Lock version: Comfort handle and 2-point locking<br>Lock Insert: Security lock insert no. 3524 E |
| Protection category IP to EN 60 529 | IP 54 in conjunction with solid gland plate top and bottom |
| Packaging unit | 1 pc(s). |
| Net weight | 43 kg |
| Gross weight | 44 kg |
| Information regarding the PCF class | Category B: PCF value (cradle-to-gate) calculated approximately on the basis of the product weight and self-declared |
| Customs tariff number | 94032080 |
| ETIM 9 | EC002500 |

# Features

| | |
|---|---|
| ETIM 8 | EC002500 |
| ECLASS 8.0 | 27180101 |
| Product description | AX wall-mounted housing AX, 3-part, WHD: 600x1,012x373 mm, 21 HE, wall section: closed flange plate top and bottom, with comfort handle |

# Approvals

| | |
|---|---|
| Approvals | UL + C-UL (listed) |
| Explanations | Declaration of conformity |