

Rittal – The System.

Faster – better – everywhere.



SK 3213.340

Air diverter

State: 4/20/2026 (Source: rittal.com/us-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



SK 3213.340 - Air diverter

Targeted cold air routing to avoid heat pockets. Especially well-suited for densely-packed electrical components in the enclosure.

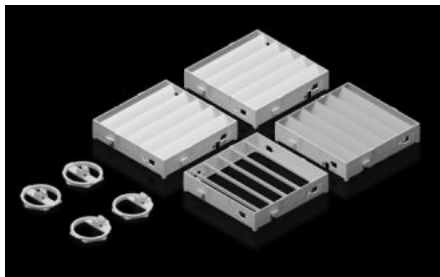

Features

Model No.	SK 3213.340
Product description	For use with wall-mounted cooling units, for targeted air routing of the cold air in a downward direction. Especially well-suited for densely-packed electrical components in the lower section of the enclosure.
Benefits	Individual adjustment of the air outlet direction Simple, tool-free assembly Quickly retrofittable (without drilling) Minimum installation depth
Material	ABS Fire protection corresponding to UL 94-V0
Color	RAL 7035
Suitable for	Wall-mounted cooling unit Blue e+
Note on Model No.:	Not suitable for wall-mounted cooling unit Blue e+ Outdoor
Suitable for Model No.	3184.837 3185.83x 3185.530

Features

Dimensions	Width: 280 mm Height: 280 mm Depth: 30 mm Width: 11 " Height: 11 " Depth: 1.18 "
Packaging unit	1 pc(s).
Net weight	0.4 kg
Gross weight	0.46 kg
Customs tariff number	39269097
ETIM 9	EC011604
ETIM 8	EC011604
ECLASS 8.0	22410601
Product description	SK Air deflection, for SK 3185.83x/.530
