
Rittal – The System.

Faster – better – everywhere.

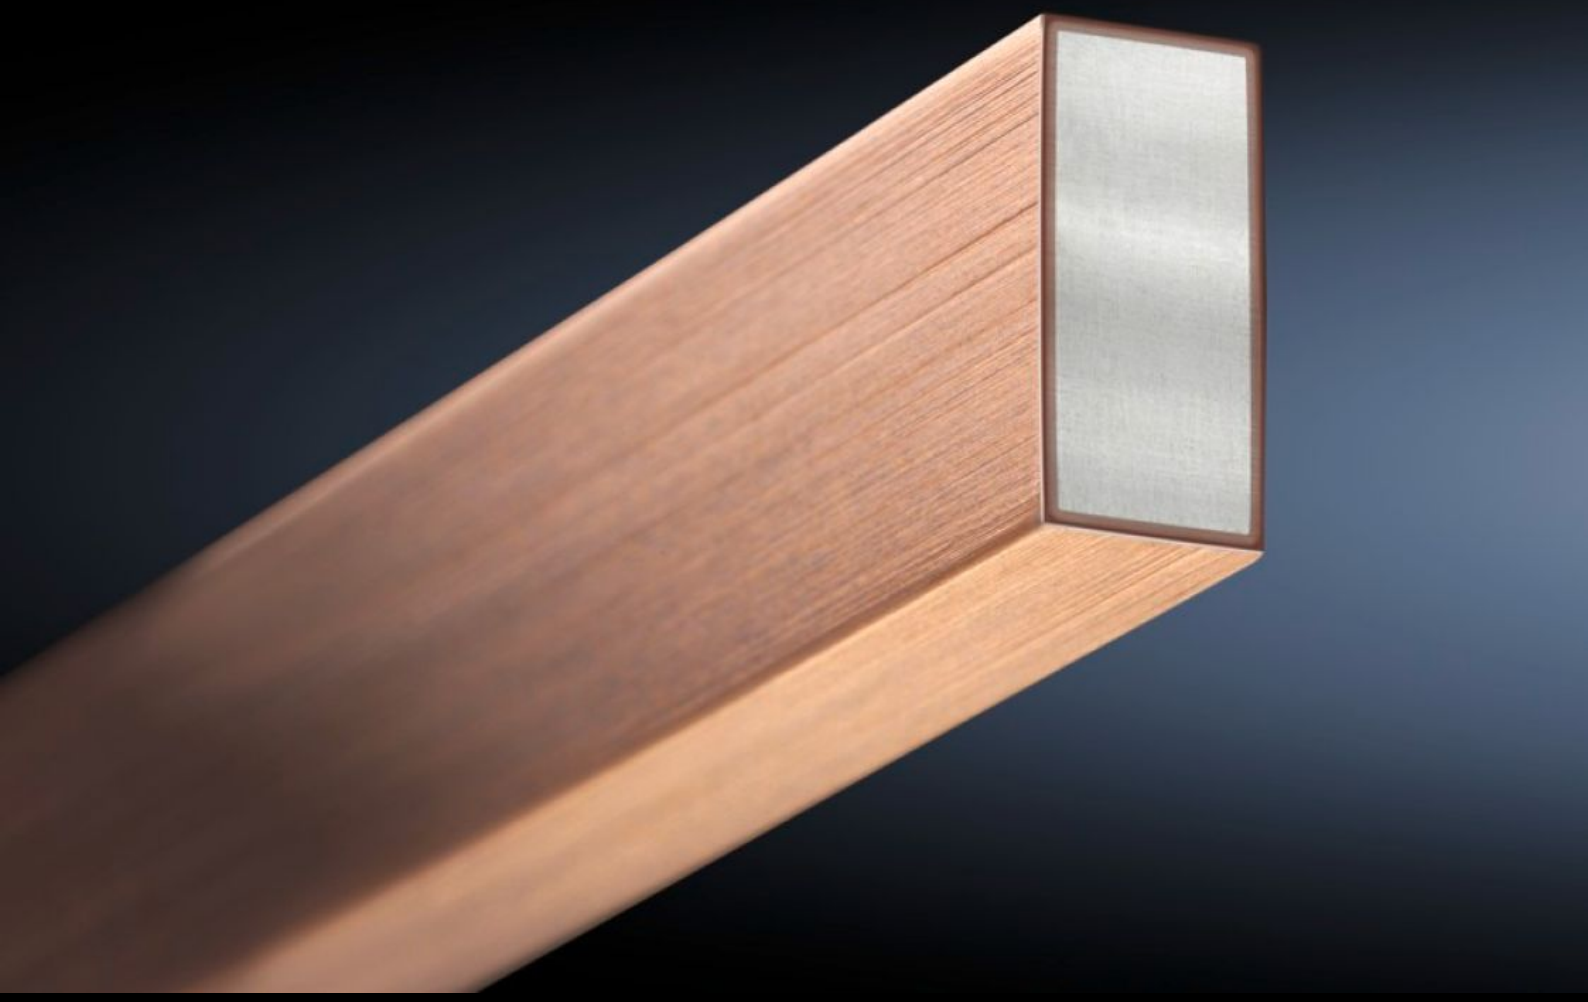

# SV 3585.020

# Busbars CUPONAL


State: 11/10/2026 (Source: www.rittal.com/us-en)

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

# SV 3585.020 - Busbars CUPONAL

Copper-coated aluminum busbars.

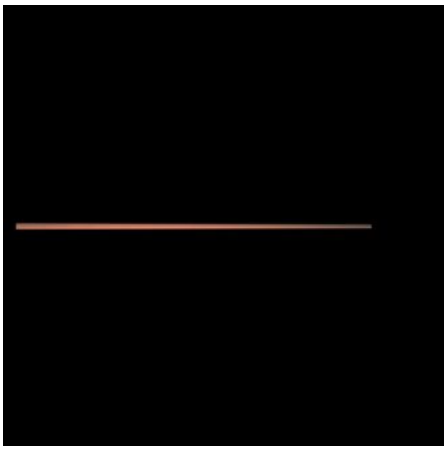



## Features

| | |
|---|---|
| Model No. | SV 3585.020 |
| Product description | Copper-coated aluminum busbars, suitable for configuring busbar systems with busbar supports SV 9340.000/SV 9340.050. |
| Material | Aluminum<br>Copper |
| Rated current max. | 363 A |
| Note | The rated current is generated at 65°C rail temperature and 35°C ambient temperature<br>Correction factor diagram according to DIN EN 43 671<br>May be cut to length as required |
| Standards | DIN EN 13 601 |
| Cross-section | 20 mm x 10 mm<br>0.79 ″ x 0.39 ″ |
| Dimensions | Length: 2,400 mm<br>Length: 94.5 ″ |
| Packaging unit | 3 pc(s). |
| Net weight | 6.3 kg |
| Gross weight | 6.5 kg |

# Features

| | |
|---|---|
| Copper weight (kg per piece) | 0.7 |
| Customs tariff number | 76042990 |
| ETIM 9 | EC001522 |
| ETIM 8 | EC001522 |
| ECLASS 8.0 | 27370303 |
| Product description | SV Busbar CUPONAL, WH: 20x10 mm, L: 2400 mm |

# Approvals

| | |
|---|---|
| Explanations | Declaration of conformity<br>Declaration of conformity UK |