
Rittal - The System.

Faster – better – everywhere.



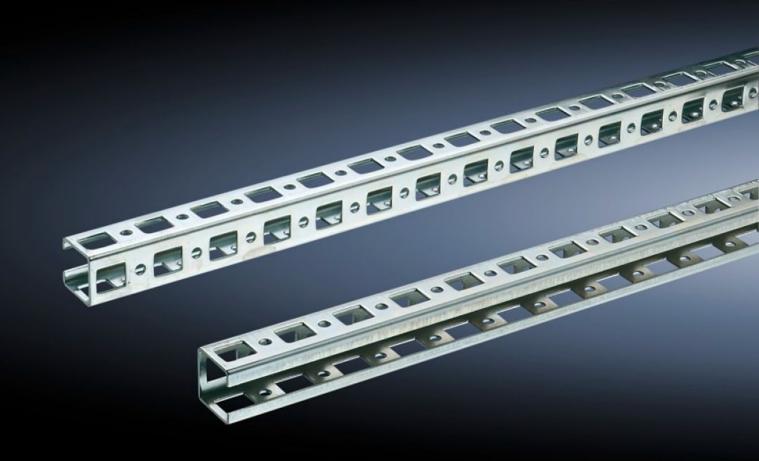

SZ 4178.000 Punched Rails, 23 x 23 mm

State: 11/15/2025 (Source: rittal.com/us-en)



SZ 4178.000 - Punched Rails, 23 x 23 mm for VX, TS, VX SE

Mounted on the horizontal and vertical enclosure sections using additional assembly components.







Features

Model No.	SZ 4178.000
Material	Carbon steel
Surface finish	Zinc-plated
Length	2,095 mm
	82.5 ″
Installation options	On the vertical enclosure section: Directly via support brackets TS,
	via adapter rail for PS compatibility in conjunction with angle
	brackets, mounting brackets or support brackets PS.
	On the horizontal enclosure section: Directly via angle brackets,
	mounting brackets or support brackets PS
Suitable for	Enclosure type: VX
	TS
	VX SE
	Suitable for width or height or depth: 2,200 mm
Packaging unit	6 pc(s).
Net weight	9.036
Gross weight	9.514
PCF/VE (cradle-to-gate)	36.3 kg CO2 eq (Cat B)

© Rittal 2025

Features

Information regarding the PCF class	Category B: PCF value (cradle-to-gate) calculated approximately on the basis of the product weight and self-declared
Customs tariff number	73269098
EAN	4028177093287
ETIM 9	EC002620
ETIM 8	EC002620
ECLASS 8.0	27189234

© Rittal 2025 3