
Rittal – The System.

Faster – better – everywhere.

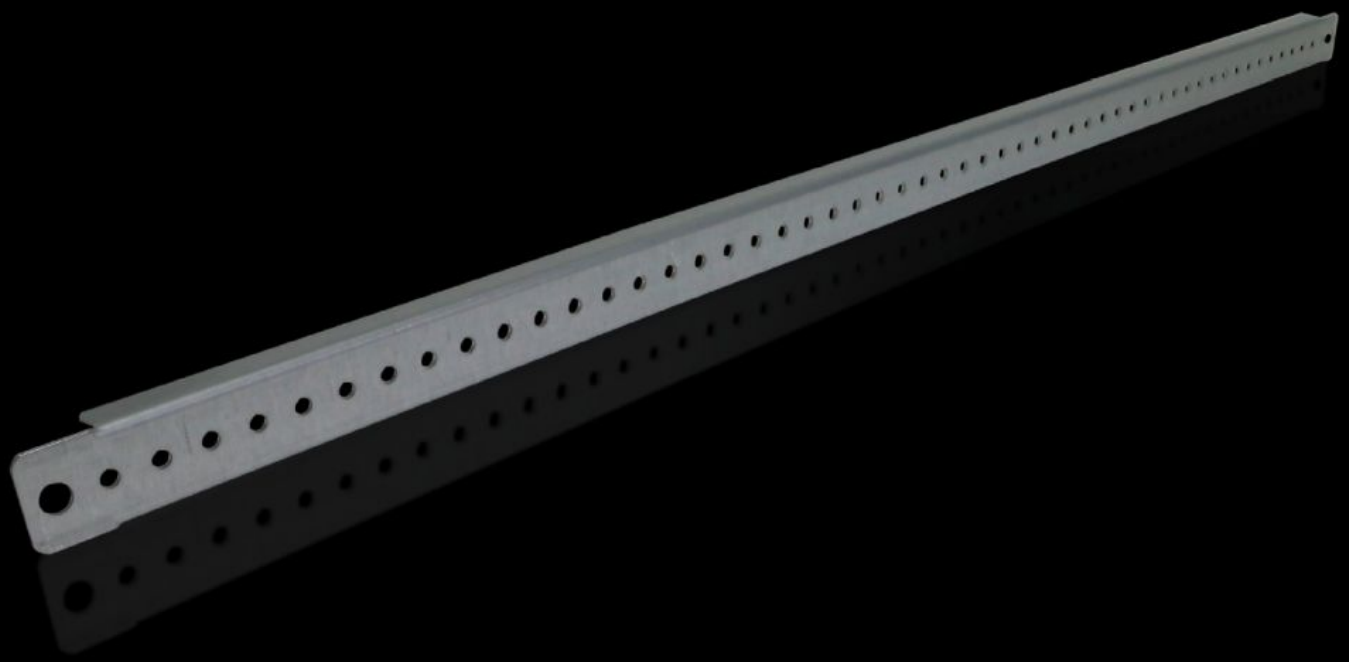

TS 4598.000

Support Strip

State: 11/15/2026 (Source: www.rittal.com/us-en)

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

TS 4598.000 - Support Strip for VX, TS, VX SE, TP, AX

For simple attachment of cable ducts, cable conduit holders, contact hazard protection cover plates, equipment installed on the door, cable clamping and attachment.





Features

Model No.	TS 4598.000
Product description	For simple attachment of cable ducts, cable conduit holders, contact hazard protection cover plates, equipment installed on the door, cable clamping and attachment.
Technical specifications	4.5 mm diameter hole on a 25 mm hole pattern
Material	Carbon steel
Surface finish	Zinc-plated
Supply includes	Assembly components
Length	690 mm 27.2 ″
Suitable for door width	800 mm 31.5 ″
Installation options VX	In door width 800 mm
Installation options VX SE	In door width 800 mm
Installation options AX	In door width 800 mm, with 3-point locking system in the locking door. In enclosure height 800 mm, in conjunction with rail for interior installation AX
Installation options AX plastic	In door width 800 mm

© Rittal 2026

Features

Installation options PC	In door width 800 mm
Installation options TS	In door width 800 mm
Suitable for	Enclosure type: VX TS VX SE PC AX AX plastic
Packaging unit	20 pc(s).
Net weight	6.78 kg
Gross weight	7.225 kg
PCF/VE (cradle-to-gate)	32.59 kg CO2 eq (Cat B)
Information regarding the PCF class	Category B: PCF value (cradle-to-gate) calculated approximately on the basis of the product weight and self-declared
Customs tariff number	73269098
ETIM 9	EC002620
ETIM 8	EC002620
ECLASS 8.0	27189261
Product description	TS support strip, for TS, VX SE, TP, for door width: 800 mm, L: 690 mm

Approvals

Explanations	PCF-declaration