


# Rittal – The System.

Faster – better – everywhere.

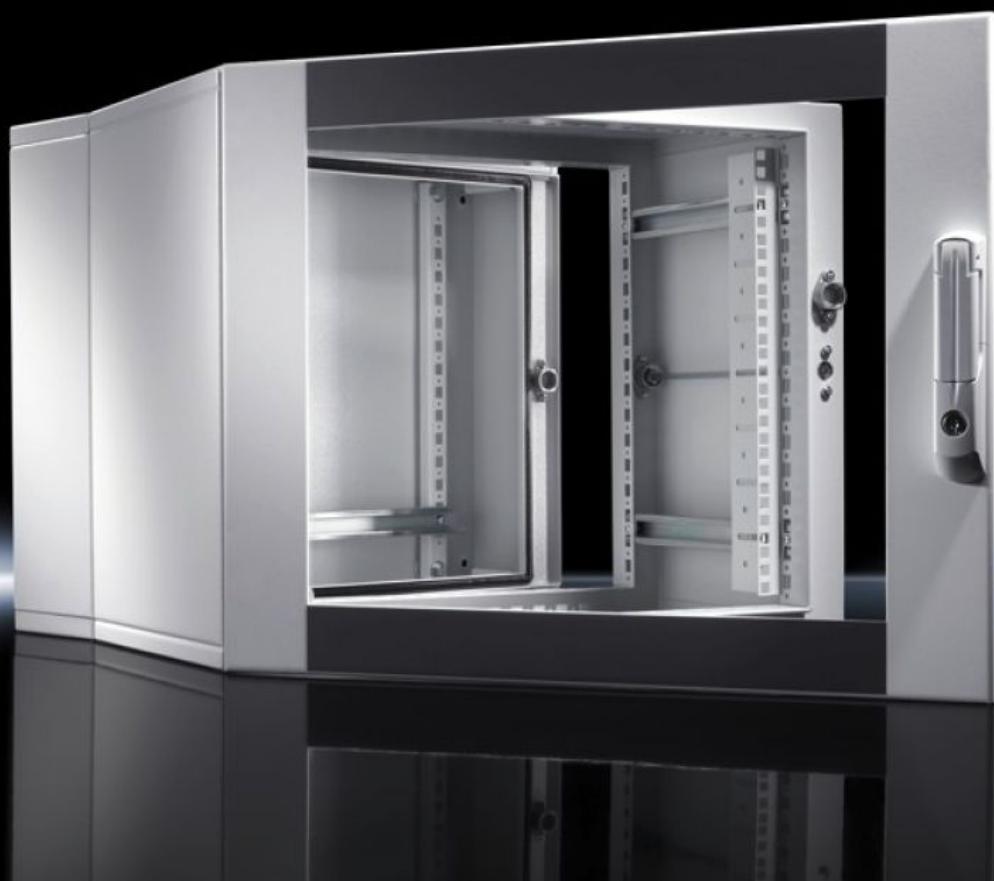

## DK 7715.135

## Wall-mounted enclosures EL, 3-part

State: 2/14/2026 (Source: [ittal.com/us-en](http://ittal.com/us-en))



FRIEDHELM LOH GROUP

# DK 7715.135 - Wall-mounted enclosures EL, 3-part with punched rails and profile rails, depth-variable

Wall-mounted housing 3-part, pre-configured with: Solid flange plate, top and bottom, punched rails, C rails, wall mounting bracket. Protection category IP 55.

## Features

|                     |   |
|---------------------|---|
| Model No.           | DK 7715.135   |
| Version             | Wall-mounted housing IT<br>with punched rails and profile rails, depth-variable   |
| Product description | Wall-mounted enclosure with hinged door provides optimum accessibility.   |
| Material            | Wall and hinged part: Carbon steel, 1.5 mm<br>Viewing window: Single-pane safety glass, 3 mm  |
| Surface finish      | Powder-coated   |
| General color       | RAL 7035  |
| Color               | Wall and hinged part: RAL 7035<br>Viewing door: RAL 7035/7015 (slate gray)  |
| Supply includes     | Wall section closed at top and bottom with flange (gland) plate, two vertical mounting rails and horizontal C-profile rails for cable clamping.<br>Hinged part with 25 mm pitch pattern in the front and rear frame, two 482.6 mm (19") profile angles at the front, fully depth adjustable 4 wall mounting brackets 10 mm<br>Designer viewing door<br>1 enclosure key double bit no. 5<br>Mini-comfort handle for lock inserts<br>Security lock 3524 E |
| Height units        | 15 U  |

# Features

|  |  |
|--|--|
| Dimensions                               | Width: 600 mm<br>Height: 746 mm<br>Depth: 473 mm<br>Width: 23.6 "<br>Height: 29.4 "<br>Depth: 18.6 "       |
| Installation depth                       | 420 mm<br>16.5 "   |
| Clearances                               | Clearance width: 502 mm<br>Clearance height: 683 mm<br>Clearance width: 19.8 "<br>Clearance height: 26.9 " |
| Depth hinged part                        | 316 mm<br>12.4 "   |
| Depth of wall section                    | 135 mm<br>5.31 "   |
| IK code                                  | IK08   |
| Load capacity of hinged part<br>(static) | 750 N<br>168.607 lbf.  |
| Base material                            | Carbon steel   |
| Protection category IP to EN 60<br>529   | IP 55  |
| Packaging unit                           | 1 pc(s).   |
| Net weight                               | 38.95  |
| Gross weight                             | 41   |
| Customs tariff number                    | 94032080   |
| EAN                                      | 4028177324206  |
| ETIM 9                                   | EC000261   |
| ECLASS 8.0                               | 27142408   |

# Approvals

---

Approvals

UL + C-UL (listed)