### Rittal - The System.

Faster – better – everywhere.





# VX 8660.026

Base/plinth corner pieces with base/plinth trim panels, front and rear

State: 8/14/2025 (Source: rittal.com/us-en)

NCLOSURES

OWER DISTRIBUTION


LIMATE CONTROL

INFRASTRUCTURE

**SOFTWARE & SERVICES** 

# VX 8660.026 - Base/plinth corner pieces with base/plinth trim panels, front and rear for base/plinth system VX, carbon steel

Base/plinth corner pieces with trim panels for flexible cable entry.

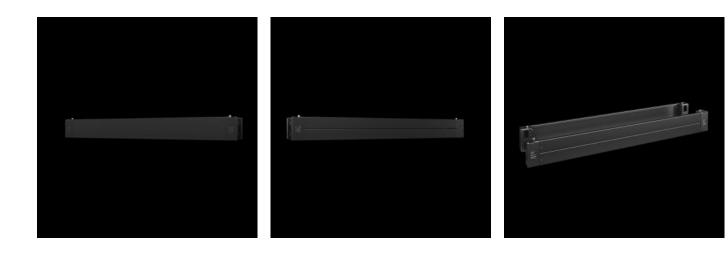

#### **Features**

Model No.	VX 8660.026	
Benefits	Reliable - very high stability of the base	
	Flexible – numerous interior expansion options with the VX	
	accessories	
	Simple – flush finish between the baying points	
Material	Base/plinth corner piece: Carbon steel	
	Base/plinth trim panels, front/rear: Carbon steel	
	Corner and baying covers: Plastic	
Color	RAL 9005	
Supply includes	4 x corner covers	
	Assembly components	
	4 x base/plinth corner pieces, 200 mm high	
	1 base/plinth trim panel, front/rear, 200 mm	
	2 x base/plinth trim panels, front/rear, 100 mm high	
Note	Base/plinth trim panels, on the side for closing off a base/plinth	
	unit, for additional stabilization of the bases/plinths to one another,	
	or for interior installation of the bases/plinths	

© Rittal 2025 2

#### **Features**

Dimensions	Height: 200 mm Height: 7.87 ″
Suitable for	Enclosure type: VX
	VX IT
	VX SE
	TX CableNet
	TS
	TSIT
	TP
	PC
	IW
	CX
	Width: = 1,600 mm
	Enclosure type: VX
	VX IT
	VX SE
	TX CableNet
	TS
	TS IT
	TP
	PC
	IW
	CX
	Width: = 63 "
Type rating according to UL 50E	Type 1
	Type 12
Weight/packaging unit	14.5 kg
	32 lb.
Packaging unit	2 pc(s).
Net weight	14.2
Gross weight	14.5
PCF/VE (cradle-to-gate)	55.2 kg CO2 eq (Cat B)
Information regarding the PCF class	Category B: PCF value (cradle-to-gate) calculated approximately on the basis of the product weight and self-declared
Customs tariff number	94039910
EAN	4028177978188

© Rittal 2025 3

## Features

ETIM 9	EC000721	
ETIM 8	EC000721	
ECLASS 8.0	27182003	

# **Approvals**

Approvals UL + C-UL - FTTA

© Rittal 2025 4