

Faster – better – everywhere.





### VX 8660.027

# Base/plinth corner pieces with base/plinth trim panels, front and rear

> IT INFRASTRUCTURE

State: 9/6/2025 (Source: rittal.com/us-en)

POWER DISTRIBUTION 🚿 CLIMATE CONTROL




SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

ENCLOSURES

## VX 8660.027 - Base/plinth corner pieces with base/plinth trim panels, front and rear for base/plinth system VX, carbon steel

Base/plinth corner pieces with trim panels for flexible cable entry.

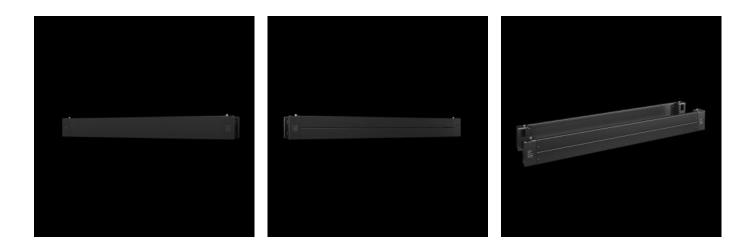

#### Features

Model No.	VX 8660.027
Benefits	Reliable - very high stability of the base
	Flexible – numerous interior expansion options with the VX accessories
	Simple – flush finish between the baying points
Material	Base/plinth corner piece: Carbon steel
	Base/plinth trim panels, front/rear: Carbon steel
	Corner and baying covers: Plastic
Color	RAL 9005
Supply includes	4 x corner covers
	Assembly components
	4 x base/plinth corner pieces, 200 mm high
	1 base/plinth trim panel, front/rear, 200 mm
	2 x base/plinth trim panels, front/rear, 100 mm high
Note	Base/plinth trim panels, on the side for closing off a base/plinth unit, for additional stabilization of the bases/plinths to one anothe
	or for interior installation of the bases/plinths

#### Features

Dimensions	Height: 200 mm Height: 7.87 ″
Suitable for	Enclosure type: VX VX IT VX SE TX CableNet TS TS IT TP PC IW CX Width: = 1,800 mm Enclosure type: VX VX IT VX SE TX CableNet TS TS IT TP PC IW CX Width: = 1,800 mm Enclosure type: VX VX IT VX SE TX CableNet TS TS IT TP PC IW CX Width: = 70.9 "
Type rating according to UL 50E	Type 1 Type 12
Weight/packaging unit	16.2 kg 35.7 lb.
Packaging unit	2 pc(s).
Net weight	16.02
Gross weight	16.1
PCF/VE (cradle-to-gate)	61.7 kg CO2 eq (Cat B)
Information regarding the PCF class	Category B: PCF value (cradle-to-gate) calculated approximately on the basis of the product weight and self-declared
Customs tariff number	94039910
EAN	4028177978195

#### Features

ETIM 9	EC000721
ETIM 8	EC000721
ECLASS 8.0	27182003

#### Approvals

Approvals

UL + C-UL - FTTA