Rittal – The System.


Faster – better – everywhere.



# SV 9340.750
# OM adapter

State: 11/5/2026 (Source: www.rittal.com/us-en)

# SV 9340.750 - OM adapter with Connection Cables

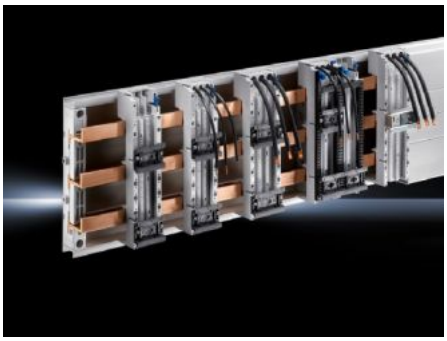

## Features

| | |
|---|---|
| Model No. | SV 9340.750 |
| Version | With connection cable |
| Material | Polyamide<br>Fire protection corresponding to UL 94-V0 |
| Color | Chassis: RAL 7035 |
| Connection cables (AWG) | AWG 8 |
| Rated current max. | 40 A |
| Rated operating voltage | 690 V, 3~ |
| Note | The technical data may vary for UL applications. |
| Electrical UL ratings (SCCR) | 30 kA - 600 V, fuse class K5 max. 60 A, JDDZ/7<br>30 kA - 480 V, Combination Motor Controller max. 63 A, NKJH/7<br>65 kA - 600 V, fuse class J max. 60 A, JDDZ/7<br>65 kA - 480 V, manual motor controller max. 63 A, NLRV/7<br>65 kA - 480 V, Combination Motor Controller max. 63 A, NKJH/7 |
| For bar systems with center-to-center spacing | 60 mm |
| Length of connection cable | 130 mm<br>5.12 ″ |
| Support rail type | Dimensions, 1 x 15 x 35 mm |
| Number of poles | 3-pole |

© Rittal 2026

# Features

| | |
|---|---|
| Dimensions | Width: 55 mm<br>Height: 208 mm<br>Width: 2.17 ″<br>Height: 8.19 ″ |
| Support rails Qty/height | 1 / 15 mm<br>0.59 ″ |
| Suitable for busbars | Height: 5, 10 mm<br>Height: 0.2, 0.39 ″ |
| Approvals | UL |
| Packaging unit | 1 pc(s). |
| Net weight | 0.34 kg |
| Gross weight | 0.381 kg |
| Copper weight (kg per piece) | 0.088 |
| Customs tariff number | 85369095 |
| ETIM 9 | EC001531 |
| ECLASS 8.0 | 27370304 |
| Product description | SV OM adaptor, 40 A, 690 V, 3-pole, connection cable AWG 8, WH: 55x208 mm, metal support rail |

# Approvals

| | |
|---|---|
| Approvals | ABS<br>DNV<br>Lloyds Register<br>UL + C-UL (listed) |
| Explanations | Declaration of conformity<br>Declaration of conformity UK |